



Self-Compensating Design

ACE Controls self-compensating shock absorbers are fixed, multi-orifice units that decelerate moving weights smoothly regardless of changing conditions, and require no adjustment. These versatile performers offer wide effective weight ranges for handling a wider range of applications and increased velocities.

As a moving load impacts the shock absorber the piston travels through the stroke and forces hydraulic fluid through the multi-orifice inner tube. The total orifice area decreases at a rate consistent with the decay of impact velocity, resulting in true linear deceleration.

The versatile SC² Series offers soft contact in combination with self-compensating performance. Soft contact is suggested when a low initial reaction force is recognized at impact. The self-compensating feature is utilized to obtain maximum energy absorption capability.

World leader in deceleration technology

For over 40 years **ACE Controls** has provided **superior industrial deceleration products** to meet the needs of the automotive, steel, machine tool, lumber, theme park, medical, and other industries. Industrial shock absorber innovations include: the adjustable and self-compensating models, as well as the more recent award winning SC² Heavyweight Series which elevated shock absorber effective weight capacity and energy absorption capability to new heights. In 1999 ACE introduced the ultimate in shock absorber design...the award winning Magnum Group, offering up to 390% of the effective weight capacity, plus up to 150% of the energy per cycle of standard models.

Lifetime Warranty

ACE Controls Inc. products are guaranteed to be free of defects in materials and workmanship. ACE will repair or replace any of its products determined to have a defect in materials or workmanship at any time for the life of the product.

Award Winning **Magnum Group**

Award Winning **SC² Heavyweight Series**

Adjustable Design

The standard adjustable ACE shock absorber is based on the multiple-orifice design principle and includes a series of orifices machined along the length of a fixed inner tube. The Magnum Group adjustable shock absorber, shown to the right, has a stationary metering tube, with an inner tube that rotates upon adjustment. These unique models offer dual adjustability by turning the stop collar or the hex socket adjuster at the rear.

The adjustable shock absorber offers flexibility in application design and selection procedure. When an effective weight change is required, one simply adjusts the setting. The total orifice area changes, providing true linear deceleration.

Adjustable models offer a wide range of effective weight. One model is capable of handling numerous applications.

SC² Heavyweight Design

The revolutionary, award-winning SC² Heavyweight design offers up to 950% of the effective weight capacity and up to 280% of the energy absorption capability of standard models. These durable units combine the piston and inner tube into a single component, *the piston tube*, which acts as both the pressure creating and pressure controlling device. The Heavyweight Series offers a full effective weight range for a wider range of applications.

General Information

$$a = \frac{0.6 \cdot V D^2}{s}$$

	page
Shock Absorber Function	3
General Information	4-5
Effective Weight	6
Quality Construction	7
Self-Compensation	8
Selection Procedure	9
Horizontal Sizing Examples	10
Inclined and Vertical Sizing Examples	11
Rotary Sizing Examples	12-13
Installation Examples	14-15
Application Examples for Shock Absorbers	16-17
Model Rating Charts	18-20
Magnum Group Emergency Shock Absorber Ratings	21

Industrial Shock Absorbers



MC 9 to MC 600 Self-Compensating, Miniature	22-25
SC ² 190 to SC ² 925 Self-Compensating, Miniature	26-27
SC 25, 75 & 190 Heavyweight Self-Compensating, Miniature	28-29
SC ² 300 & SC ² 650 Heavyweight Self-Compensating, Miniature	30-31
SC 25 to SC 650-HC High-Cycle Self-Compensating	32-35
MA 30 to MA 900 Adjustable, Miniature	36-37
AS 3/8x1" Adjustable, Miniature	38-39
Accessories, Miniature Shock Absorber	40-42
Steel Button/Urethane Cap Assembly Chart for All Models	43
Side Load Adapters for Miniature Shock Absorbers	44-45
Side Load Adapters for Magnum Group Shock Absorbers	45
Magnum Group – MC, MA, ML Series, Models 33 to 64	46-53
Accessories, Magnum Group	54-56
Ordering Information, Magnum Group	57
1-1/2" Bore Series Adjustable	58-59
CA 2" to 4" Bore, A 2" and 3" Bore Heavy Industrial Shock Absorbers	60-67
Air / Oil Tanks	68
Mounting Hints and Operation Details	69

Safety Shock Absorbers



Stacker Crane Shock Absorbers SCS-38 to 63	70-73
Industrial Crane Bumper Shock Absorbers CB 63 to 160	74-77

Velocity and Feed Controllers



VC Precision Hydraulic Feed Controls	78-79
MVC Feed Controls	80-81
DVC Hydraulic Speed/Feed Controls	82-83
Velocity and Feed Controllers, Installation Examples	84

Media, Catalogs and Distributors

ACESIZE, CAD Files and Other Products	85
Other Products	86-87
ACE Overview	88
Distributors	89

Virtually all manufacturing processes involve movement of some kind. In production machinery this can involve linear transfers, rotary index motions, fast feeds etc. At some point these motions change direction or come to a stop.

Any moving object possesses kinetic energy as a result of its motion. When the object changes direction or is brought to rest, the dissipation of this kinetic energy can result in destructive shock forces within the structural and operating parts of the machine.

Kinetic energy increases as an exponential function of velocity. The heavier the object, or the faster it travels, the more energy it has. An increase in production rates is only possible by dissipating this kinetic energy smoothly and thereby eliminating destructive deceleration forces.

Older methods of energy absorption such as rubber buffers, springs, hydraulic dashpots and cylinder cushions do not provide this required smooth deceleration characteristic – they are non linear and produce high peak forces at some point during their stroke.


The optimum solution is achieved by an **ACE industrial shock absorber**. This utilizes a series of metering orifices spaced throughout its stroke length and provides a **constant linear deceleration** with the lowest possible reaction force in the shortest stopping time.

ACE Controlled Linear Deceleration



ACE Wine Drop Display Property
An ACE shock absorber decelerates a free-falling 100 lb (45 kg) weight so effectively that the contents of the glass don't even spill.


Stopping with Rubber Bumpers, Springs, Dashpots or Cylinder cushions

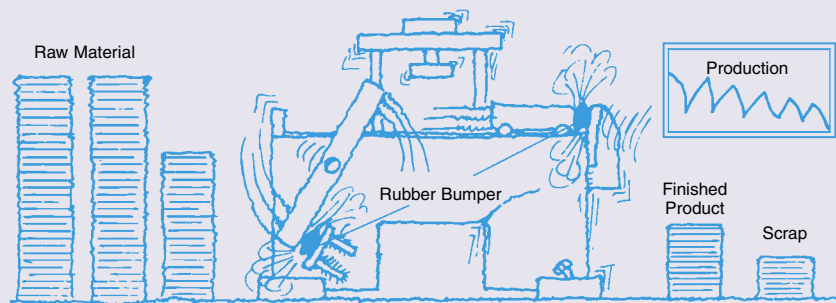

Result:

- Loss of Production
- Machine Damage
- Increased Maintenance Costs
- Increased Operating Noise
- Higher Machine Construction Costs


Stopping with ACE Shock Absorbers

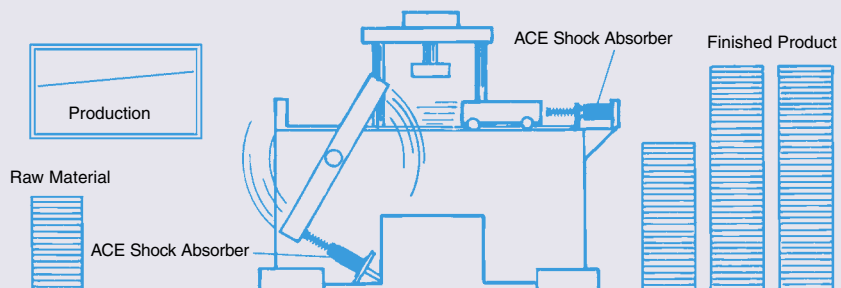

Benefits:

- Increased Production
- Increased Operating Life of the Machine
- Improved Machine Efficiency
- Reduced Construction Costs of the Machine
- Reduced Maintenance Costs
- Reduced Noise Pollution
- Reduced Energy Costs


Comparison

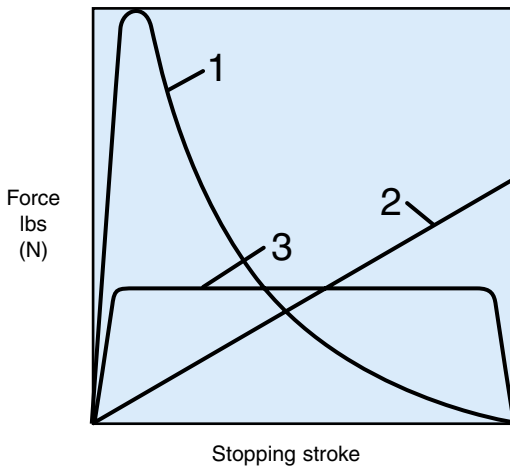

- 1. Cylinder Cushions and Dashpots (High stopping force at start of the stroke).** With only one metering orifice the moving load is abruptly slowed down at the start of the stroke. The braking force rises to a very high peak at the start of the stroke (giving high shock loads) and then falls away rapidly.
- 2. Springs and Rubber Bumpers (High stopping forces at end of stroke).** The moving load is slowed down by a constantly rising reaction force up to the point of full compression. These devices store energy rather than dissipate it, which causes the load bounce back.
- 3. ACE Industrial Shock Absorbers (Uniform stopping force through the entire stroke).** The moving load is smoothly and gently brought to rest by a constant resisting force throughout the entire shock absorber stroke. The load is decelerated with the lowest possible force in the shortest possible time eliminating damaging force peaks and shock damage to machines and equipment. This is a linear deceleration force stroke curve and is the curve provided by ACE industrial shock absorbers.

4

Energy Capacity

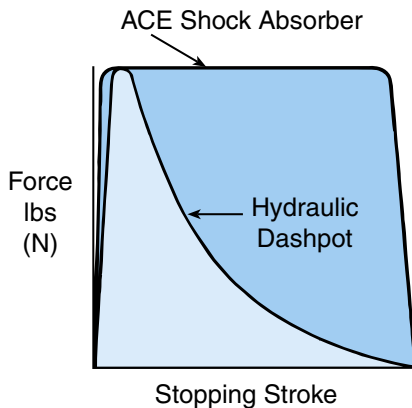

Premise:

Same maximum reaction force.

Result:


The ACE shock absorber can absorb considerably more energy (represented by the area under the curve.)

Benefit:

By installing an ACE shock absorber production rates can be more than doubled without increasing deceleration forces or reaction forces on the machine.

Reaction Force

(stopping force)

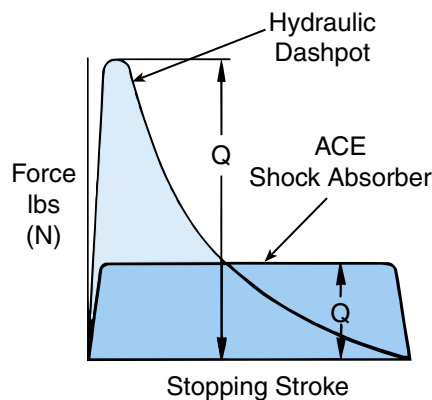

Premise:

Same energy absorption (area under the curve).


Result:

The reaction force transmitted by the ACE shock absorber is very much lower.

Benefit:

By installing the ACE shock absorber the machine wear and maintenance can be drastically reduced.

Stopping Time

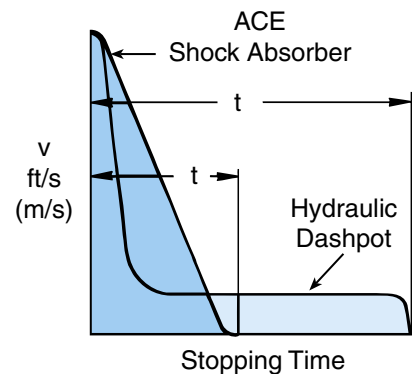

Premise:

Same energy absorption.

Result:


The ACE shock absorber stops the moving load in a much shorter time.

Benefit:

By installing an ACE shock absorber cycle times are reduced giving much higher production rates.

ACE pioneered the use of one piece / closed end bodies and inner pressure chambers in its range of shock absorbers. This design concept provides an extremely strong construction which can withstand much higher internal pressures and overload forces without mechanical damage. Consider what happens if the shock absorber is accidentally overloaded or in the unlikely event of partial oil loss due to excessive seal wear or damage. Compare the internal design used by ACE with that of some of its competitors:

ACE Shock Absorber

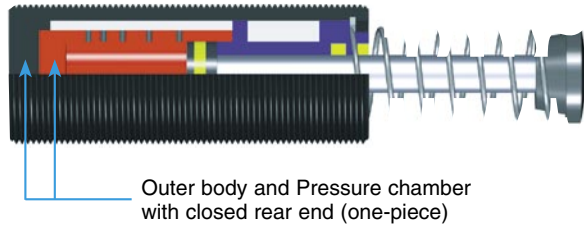

ACE builds its shock absorbers with closed end/one piece bodies and inner pressure chambers which greatly reduces the chance of sudden failure or machine damage in the event of an overload.


What happens with an overload or gradual oil loss?

Harder bottoming out force becomes apparent. The shock absorber continues to work and can be replaced then or at the end of the shift.

Corrective Action:

Remove and replace the shock absorber. Refill with fresh oil or repair.

Other Shock Absorber

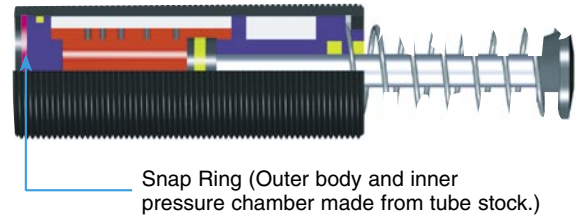


Some other manufacturers use bodies and inner pressure chambers made from tube stock. The internal parts are held in by a snap ring etc. which then takes all the load and can fail suddenly and catastrophically.

What happens with an overload or gradual oil loss?

The snap ring breaks or is extruded due to excessive force. Machine damage!! Equipment Stops!! Production Halted!! Emergency Repair!!



Corrective Action:

Remove and replace the shock absorber with new one (repair not possible).

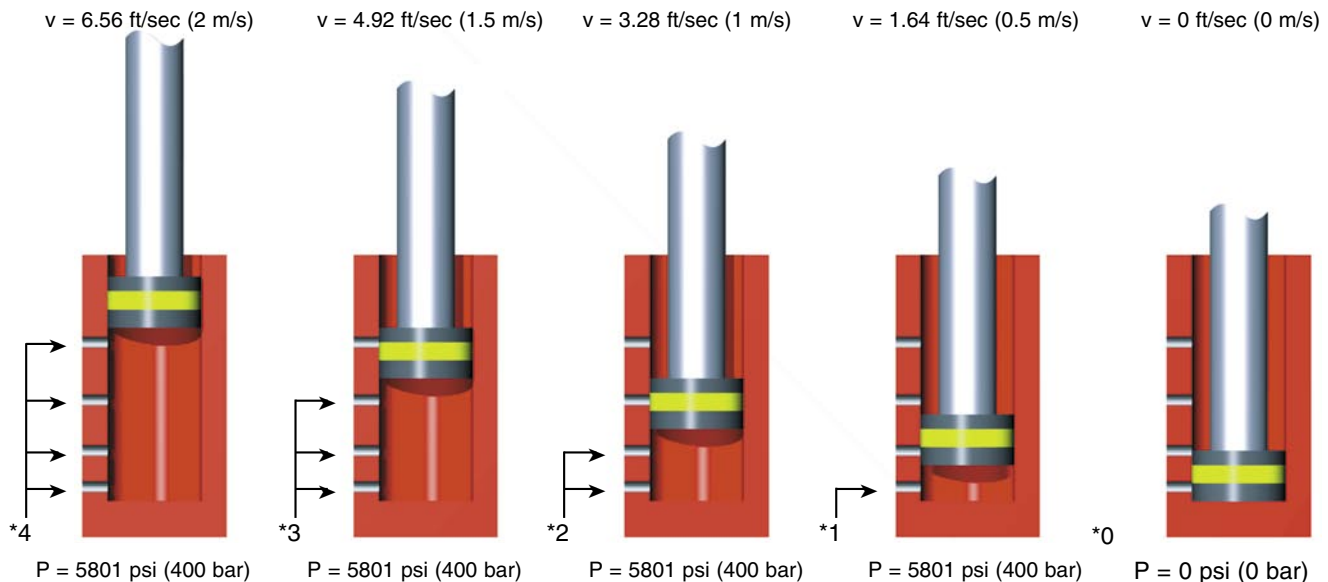

* As a moving load impacts the shock absorber, the piston travels through stroke and forces hydraulic fluid through the multi-orifice inner tube. The total orifice area decreases at a rate consistent with the decay of impact velocity, resulting in true linear deceleration.

F = Force lbs (N)
P = Internal pressure psi (bar)
s = Stroke in (m)
t = Deceleration time (s)
v = Velocity ft/s (m/s)

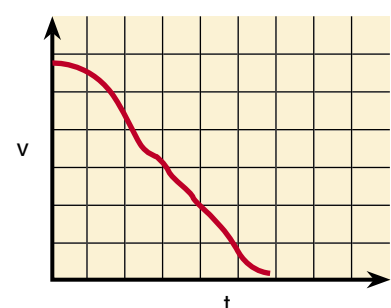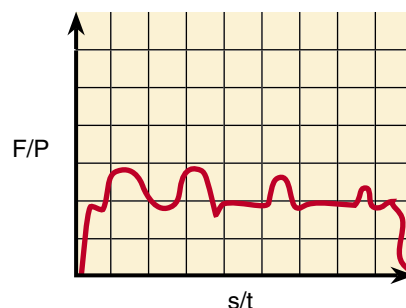

Effective weight is an important factor in selecting shock absorbers. A shock absorber “sees” the impact of an object in terms of weight and velocity only; it does not “see” any propelling force. The effective weight can be thought of as the weight that the shock absorber “sees” on impact. Effective weight includes the effect of the propelling force on the performance of the shock absorber.

Failing to consider the effective weight may result in improper selection and poor performance of the shock absorber. Under extreme conditions, an effective weight that is too low may result in high forces at the start of stroke (high on-set force). However, an effective weight that is too high for the shock absorber may cause high forces at the end of stroke (high set-down force).

Consider the following examples:

- 1.) A 5 lb (2.27 kg) weight travelling at 25 ft/sec (7.62 m/s) has 625 lbs (71 Nm) of kinetic energy (figure A). On this basis alone, a MA 3325 would be selected. However, because there is no propelling force, the calculated effective weight is five pounds – which is below the effective weight range of the standard MA 3325. This is a high on-set force at the start of the stroke (Figure B). The solution is to use a specially-orificed shock absorber to handle the load.
- 2.) A weight of 50 lbs (22.68 kg) has an impact velocity of 0.5 ft/sec (0.15 m/s) with a propelling force of 800 lbs (111N) (Figure C). The total impact energy is 802.5 inch-pounds. Again, a MA 3325 would be selected based just on the energy. The effective weight is calculated to be 16,050 pounds (7,280 kg). This is well above the range of the standard MA 3325. If this shock absorber is used, high-set-down forces will result (Figure D). In this case, the solution is to use a ML 3325, which is designed to work in low-velocity, high-effective weight applications.

Computer-Aided Simulation

By combining application data with a shock absorbers design parameters, ACE engineers can create a picture of how the shock will perform when impacted by the application load. Peak reaction force, peak deceleration (G's), time through stroke, and velocity decay are identified with extreme accuracy. The user benefits by having the guesswork taken out of sizing decisions and by knowing before installation how his shock problem will be solved.

Simulation is also used to maximize the performance of ACE adjustable models by predicting the ideal adjustment setting for a particular group of conditions.

By using simulation software during product development stages, ACE has maximized the performance of its entire line of deceleration devices for over two decades.

Figure A

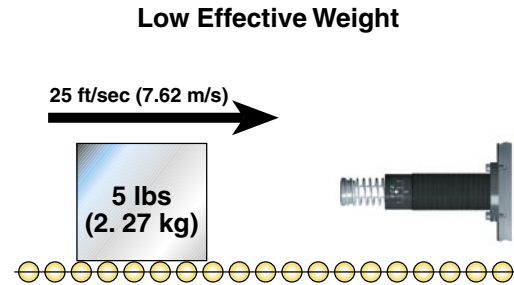


Figure B

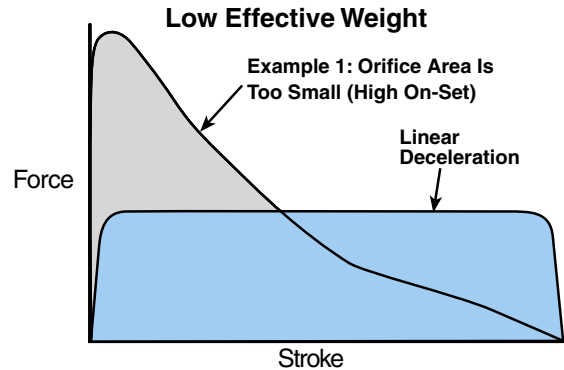


Figure C


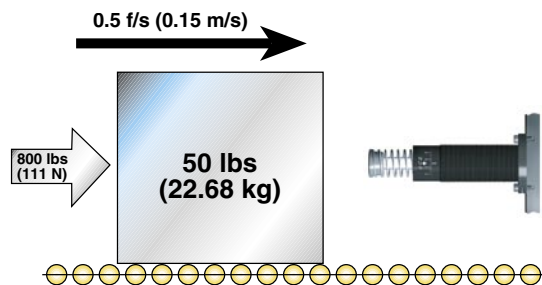


Figure D

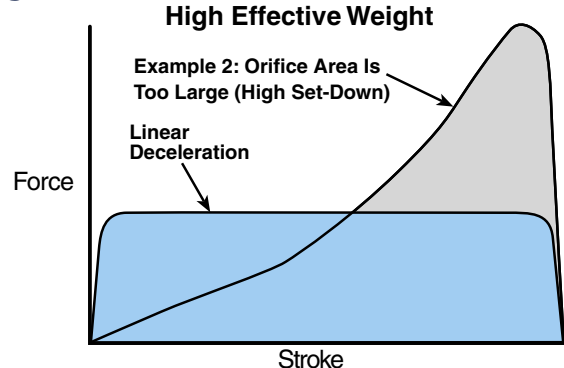


ACE Controls has not only established a reputation as the world leader in deceleration technology, but in quality as well. **ACE was awarded ISO 9001 quality status in 1994, and attained ISO 9001:2000 status in 2002.**

The employees of ACE Controls are dedicated to building a quality product, assuring customer satisfaction and delivering on time.

As a result of this employee focus, ACE Controls shock absorbers are built to the **highest standards**. A majority of ACE shock absorber bodies and inner pressure chambers are fully machined from solid alloy steel. A completely closed-end, one-piece pressure chamber is provided without seals or retaining rings.

The advantage of this design is that the ACE shock absorber is able to withstand much higher internal pressures or overload without damage, thereby providing a high operational safety margin.

The features listed on this page are representative of the rugged, dependable components that are built into each ACE Controls shock absorber.

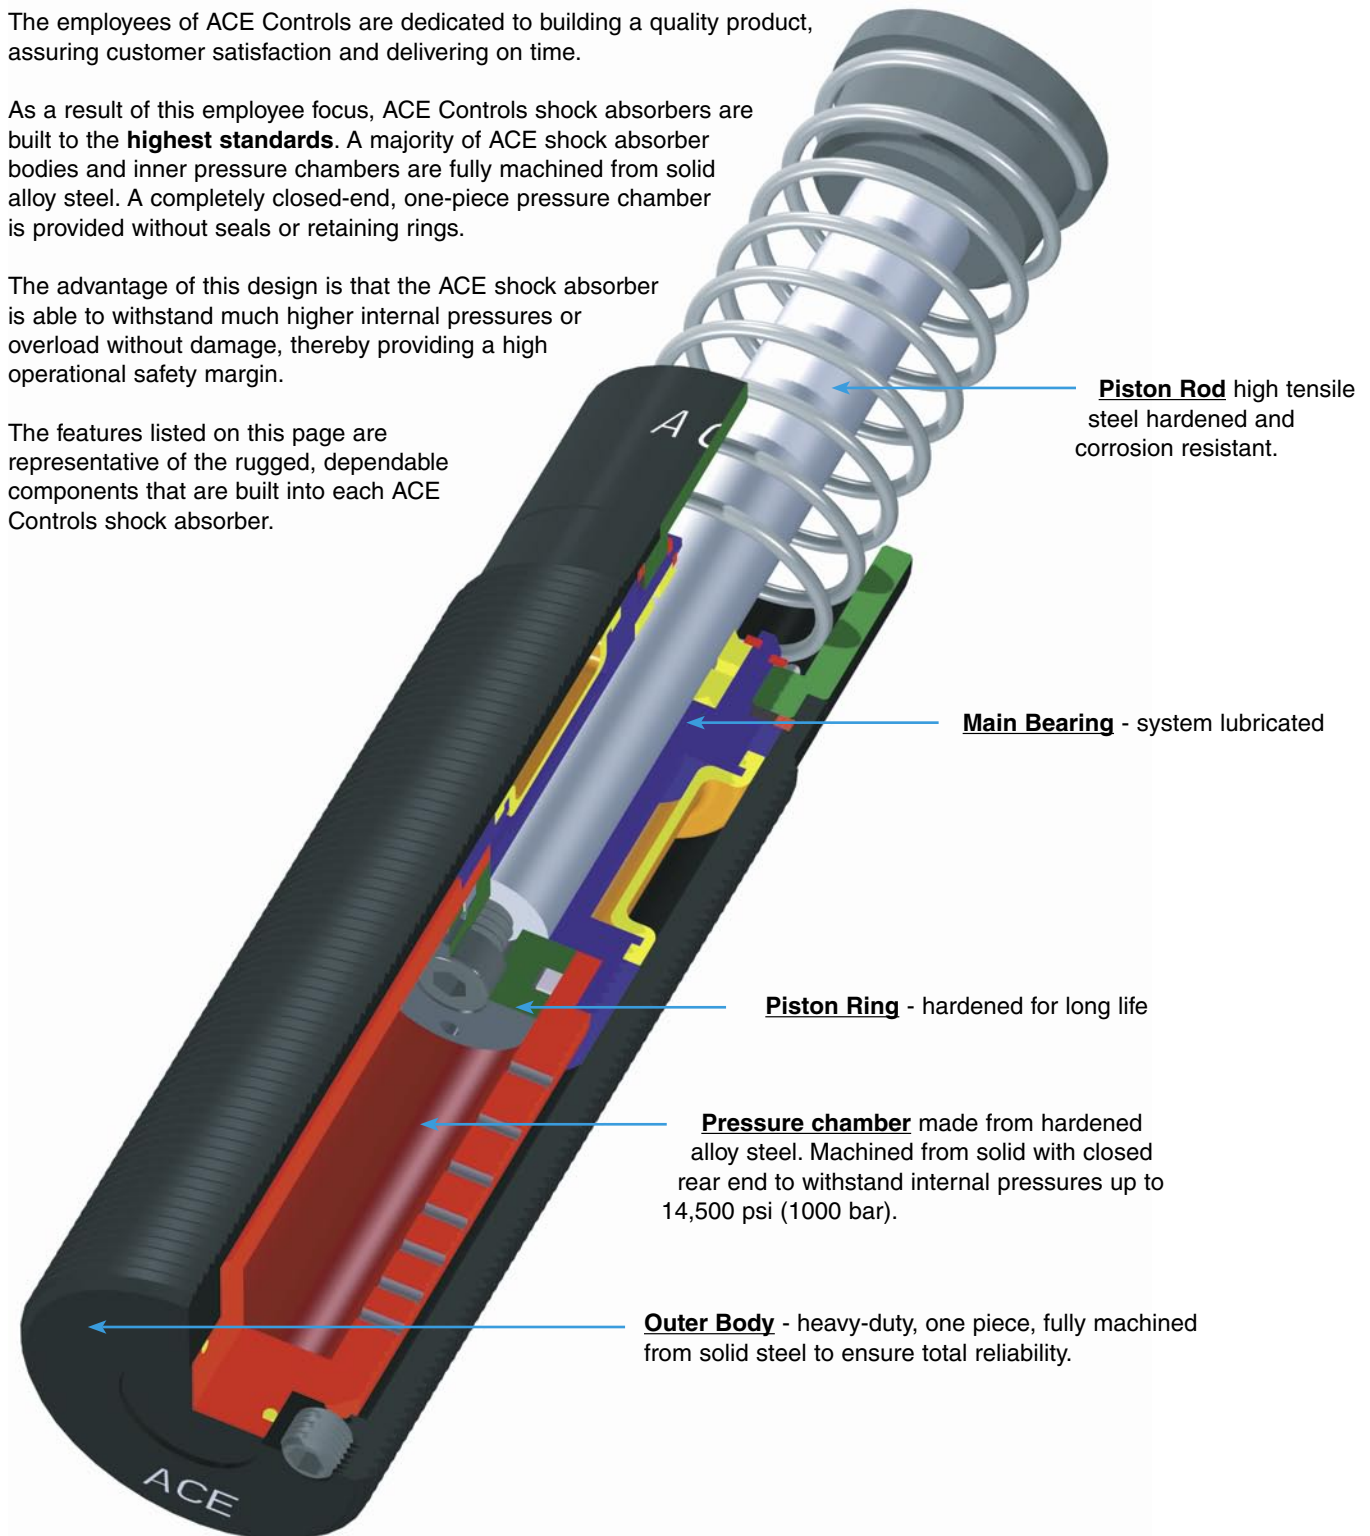

Self-Compensating Shock Absorbers

In cases where non-adjustability is beneficial but the features of an adjustable shock absorber are required, self-compensating shocks meet both needs. With a range of effective weight, a self-compensating shock absorber will provide acceptable deceleration under changing energy conditions.

The orifice profile, designed by a computer that constantly arranges the size and location of each orifice while inputting changing effective weights, neutralizes the effect of changing fluid coefficients, weight, velocity, temperature and fluid compressibility.

Figure A

A linear decelerator by definition decelerates a moving weight at a linear or constant rate of deceleration. The adjustable shock absorber is able to provide linear deceleration when operated within its energy capacity and effective weight range by dialing in the required orifice area. The resulting force-stroke curve (Figure A) shows optimum (lowest) stopping force.

Figure B

Figure B shows the force-stroke of a self-compensating shock absorber stopping a weight at the low end of its effective weight range. Note how the reaction forces are no longer constant but are still acceptable. The curve is skewed slightly higher at the beginning of the stroke and dips lower at the end.

Figure C

Figure C is a force-stroke curve of the same self-compensating shock absorber in Figure B but at the high end of its effective weight range. The energy curve is now skewed upward at the end of stroke and still yields acceptable deceleration.

Figure D

Figure D is a family of force-stroke curves:

- Adjustable shock absorber properly tuned, or hydro shock perfectly matched.
- Self-compensating shock absorber at the low end of its effective weight range.
- Self-compensating shock absorber at the high end of its effective weight range.
- Adjustable closed down, or hydro shock not matched (dashpot effect).

Figure A

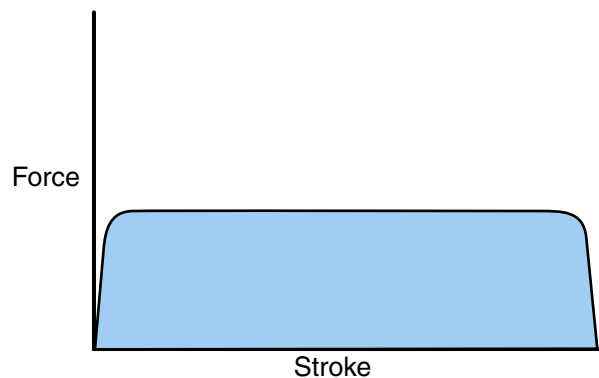


Figure B

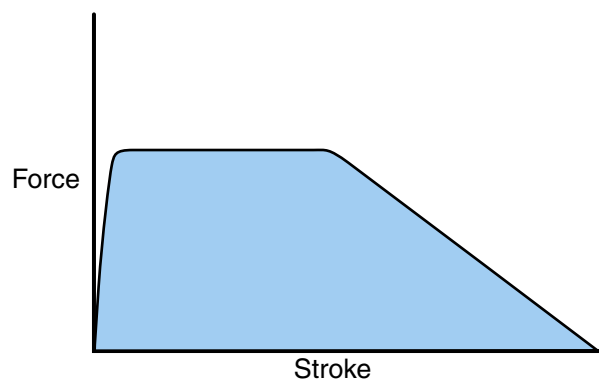


Figure C


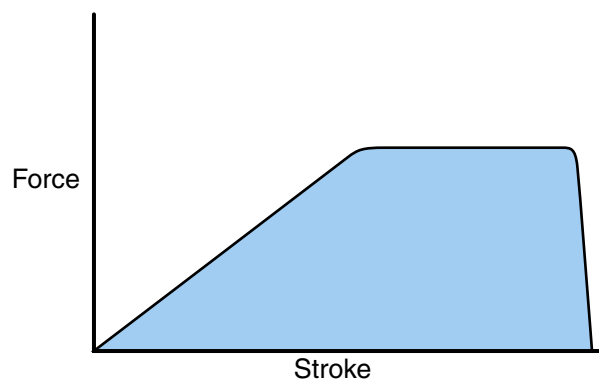


Figure D

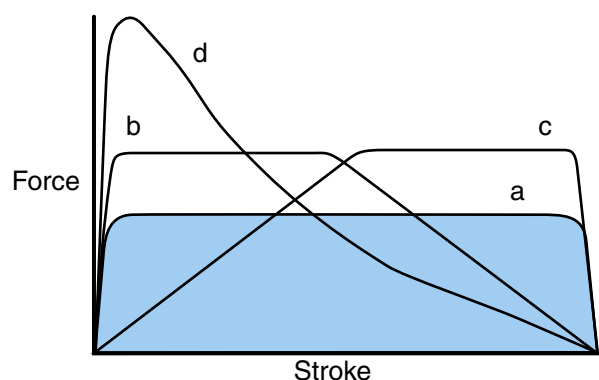

ACE Controls offers industrial and safety shock absorber CAD Files for downloading from the ACE web site at www.acecontrols.com. The CAD File software is titled interFACE. ACE's Windows-based sizing software, ACESIZE, is also available for downloading. Both software packages, along with the CAD Files are also available on a CD-ROM. See page 85 for additional information.

The shock absorber selection procedure below has been made available for customers who prefer to select without the aid of computer-related technology.

To select the best shock absorber for your application, follow these steps:

- 1.** Determine how the object will hit the shock absorber: horizontal motion, inclined or vertical motion, or rotary motion.
- 2.** Use the example pages in this catalog to find the closest match to your application. Horizontal application examples are illustrated on page 10; inclined and vertical examples, page 11; and rotary examples, pages 12 and 13.
- 3.** Select a stroke length from the Model Rating Charts on (pages 18 and 19). If you are uncertain what stroke length is most desirable for your application, use the weight of the object as a guide. For weights under 500 pounds, use a 1-inch stroke; for weights over 500 pounds, use a 2-inch stroke.
- 4.** Use the equations shown to determine energy per cycle (E_c), energy per hour (E_h) and effective weight (We).
- 5.** Refer to the Model Rating Charts on pages 18 and 19. Compare your step 4 results with the values in the Model Rating Charts columns 3, 4 and 5. A suitable shock absorber must have greater energy per cycle (column 3) and energy per hour (column 5) values than the results you calculated. For best results, keep E_c between 20 and 80 percent of the energy per cycle. In addition, your calculated effective weight must lie within the shock absorber's range (column 4). Select a suitable shock absorber from the charts on pages 18 and 19.
- 6.** Check the stroke in column 2.
 - If it matches the stroke in your calculation, the shock absorber you have selected can handle your application. Column 6 provides the page number where you will find additional product information.
 - If the stroke does not match, proceed to step 7.
- 7.** If a 1-inch stroke was originally chosen, replace it with a 2-inch stroke and return to step 4. If a 2-inch stroke was originally chosen, specify a 1-inch stroke and return to step 4.

If you have unsuccessfully tried both the 1-inch and 2-inch stroke calculations, check the energy per cycle on your calculation sheet. If the energy per cycle is less than 225 inch-pounds when using a 1-inch stroke, your application is probably in the range of ACE's smallest shock absorbers. Study the Model Rating Chart between the MC 9 and the MC 225 H2 self-compensating models, or between the MA 35 and MA 225 adjustable models. Select a shock absorber that is close to the calculated energy per cycle, energy per hour and effective weight. Use the stroke in column 2, and return to step 4.


If you have tried both 1-inch and 2-inch stroke, and the calculated energy per cycle is over 12,000 inch-pounds when using the 2-inch stroke, consider using a larger shock absorber. Study the Model Rating Chart list between MC 64100-1 and the CA 4 X 16-7 self-compensating models, or between the MA 64100 and A 3 X 12 adjustable models. Select a shock absorber that is close to the calculated energy per cycle, energy per hour and effective weight. Remember that in most cases E_c will increase as the stroke increases. Use the stroke in column 2, and return to step 4.
- 8.** If you are still unable to select a shock absorber and the impact velocity is below 1.5 feet/second, consider specifying an ML Series model. Using your calculations based on a 1-inch and 2-inch stroke, repeat step 5, this time using the ML chart on page 19. Be sure that the impact velocity is between .05 and 1.5 feet/second (0.01 and 0.46 m/sec.).
- 9.** If you are uncertain of the proper shock absorber for your application, contact ACE's Applications Department at 800-521-3320.

NOTE: When using more than one shock absorber on an application, divide the quantity of shock absorbers into: We , E_c and E_h .

Horizontal Sizing Examples

W = Moving Weight (lbs)	Hp = Motor Power (horsepower)	E_1 = Kinetic Energy (in lbs)
V = Impact Velocity (ft/sec)	Mu = Coefficient of Friction	E_2 = Propelling Force Energy (in lbs)
Fp = Known Propelling Force (lbs)	C = Cycles per Hour (/hour)	E_3 = Energy per Cycle (in lbs)
B = Propelling Cylinder Bore (inches)	s = Stroke Length of Shock Absorber (inches)	E_4 = Energy per hour (in lbs/hour)
R = Propelling Cylinder Rod (inches)	F = Propelling Force at Shock Absorber (lbs)	We = Effective Weight (lbs)
P = Air Pressure (psi)		

H1 Weight with No Propelling Force Examples: Crash Testers, Emergency Stops

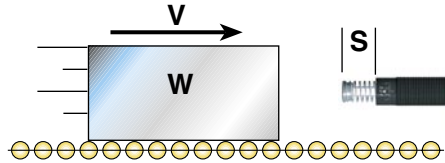

FORMULA

$$\begin{aligned} E_1 &= (0.186) \cdot (W) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_3 / (0.186) \cdot (V^2) \end{aligned}$$


EXAMPLE

$$\begin{aligned} W &= 500 \text{ lbs} \\ V &= 3 \text{ ft/sec} \\ Fp &= 0 \\ C &= 500/\text{hour} \end{aligned}$$

$$\begin{aligned} E_1 &= (0.186) \cdot (500) \cdot (3^2) = 837 \text{ in lbs} \\ E_2 &= (0) \cdot (1) = 0 \text{ in lbs} \\ E_3 &= 837 + 0 = 837 \text{ in lbs} \\ E_4 &= (837) \cdot (500) = 418,500 \text{ in lbs/h} \\ We &= 837 / (0.186) \cdot (3^2) = 500 \text{ lbs} \end{aligned}$$

H1 - Select from Model Rating Chart: MC 3325-3 or MA 3325

H2 Weight with Propelling Force Transfer Devices, Safety Doors, Cutting Shears

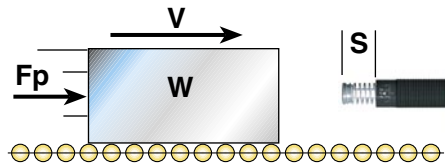


$$\begin{aligned} F &= Fp \\ E_1 &= (0.186) \cdot (W) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_3 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 14 \text{ lbs} \\ V &= 2.2 \text{ ft/sec} \\ Fp &= 30 \text{ lbs} \\ C &= 100/\text{hour} \\ s &= 0.4 \text{ inches} \end{aligned}$$

$$\begin{aligned} F &= 30 \\ E_1 &= (0.186) \cdot (14) \cdot (2.2^2) = 12.6 \text{ in lbs} \\ E_2 &= (30) \cdot (0.4) = 12 \text{ in lbs} \\ E_3 &= 12.6 + 12 = 24.6 \text{ in lbs} \\ E_4 &= (24.6) \cdot (100) = 2,460 \text{ in lbs/h} \\ We &= 24.6 / (0.186) \cdot (2.2^2) = 27.3 \text{ lbs} \end{aligned}$$

H2 - Select from Model Rating Chart: MC 75-3

H3 Weight with Propelling Cylinder Pick-and-Place Units, Linear Slides, Robotics

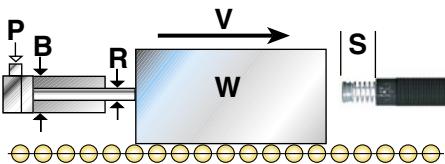

Note: R = 0 when using a rodless cylinder or a cylinder working in extension.


$$\begin{aligned} F &= 0.785 \cdot (B^2 - R^2) \cdot (P) \\ E_1 &= (0.186) \cdot (W) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_3 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 120 \text{ lbs} \\ V &= 2 \text{ ft/sec} \\ B &= 1.5 \text{ inches} \\ R &= 0 \text{ inches} \\ P &= 60 \text{ psi} \\ C &= 60/\text{hour} \\ s &= 0.75 \text{ inches} \end{aligned}$$

$$\begin{aligned} F &= 0.785 \cdot (1.5^2 - 0^2) \cdot 60 = 106 \text{ lbs} \\ E_1 &= (0.186) \cdot (120) \cdot (2^2) = 89.3 \text{ in lbs} \\ E_2 &= (106) \cdot (0.75) = 79.5 \text{ in lbs} \\ E_3 &= 89.3 + 79.5 = 168.8 \text{ in lbs} \\ E_4 &= (168.8) \cdot (60) = 10,128 \text{ in lbs/h} \\ We &= 168.8 / (0.186) \cdot (2^2) = 226.9 \text{ lbs} \end{aligned}$$

H3 - Select from Model Rating Chart: MA 225 or SC 300-4

H4 Weight with Motor Drive Lift Trucks, Stacker Units, Overhead Cranes

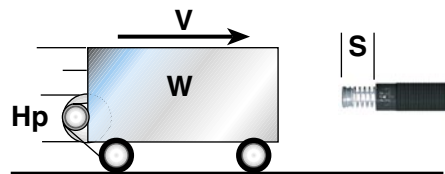


$$\begin{aligned} F &= (550) \cdot (ST) \cdot (Hp) / V \\ E_1 &= (0.186) \cdot (W) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_3 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 2,100 \text{ lbs} \\ V &= 1 \text{ ft/sec} \\ Hp &= 2 \text{ hp} \\ ST &= 2.5 \\ C &= 20/\text{hour} \\ s &= 2 \text{ inches} \end{aligned}$$

$$\begin{aligned} F &= (550) \cdot (2.5) \cdot (2) / 1 = 2,750 \text{ lbs} \\ E_1 &= (0.186) \cdot (2,100) \cdot (1^2) = 390.6 \text{ in lbs} \\ E_2 &= (2,750) \cdot (2) = 5,500 \text{ in lbs} \\ E_3 &= 390.6 + 5,500 = 5,890.6 \text{ in lbs} \\ E_4 &= (5,890.6) \cdot (20) = 117,812 \text{ in lbs/h} \\ We &= 5,890.6 / (0.186) \cdot (1^2) = 31,670 \text{ lbs} \end{aligned}$$

H4 - Select from Model Rating Chart: ML 6450 or MC 6450-4

H5 Weight on Power Rollers/Conveyor Pallet Line, Friction Conveyor Belt, Steel Tube Transfer

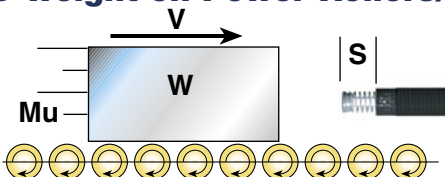

$$\begin{aligned} F &= (W) \cdot (Mu) \\ E_1 &= (0.186) \cdot (W) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_3 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 250 \text{ lbs} \\ V &= 2.5 \text{ ft/sec} \\ Mu &= 0.2 \\ C &= 180/\text{hour} \\ s &= 1 \text{ inches} \end{aligned}$$

$$\begin{aligned} F &= (250) \cdot (0.2) = 50 \text{ lbs} \\ E_1 &= (0.186) \cdot (250) \cdot (2.5^2) = 290.6 \text{ in lbs} \\ E_2 &= (50) \cdot (1) = 50 \text{ in lbs} \\ E_3 &= 290.6 + 50 = 340.6 \text{ in lbs} \\ E_4 &= (340.6) \cdot (180) = 61,308 \text{ in lbs/h} \\ We &= 340.6 / (0.186) \cdot (2.5^2) = 293 \text{ lbs} \end{aligned}$$


H5 - Select from Model Rating Chart: MA 600 or SC 650-3

Inclined and Vertical Sizing Examples

W = Moving Weight (lbs)	A = Angle of Inclined Plane (°)	E ₁ = Kinetic Energy (in lbs)
V = Impact Velocity (ft/sec)	Wcw = Counter Weight (lbs)	E ₂ = Propelling Force Energy (in lbs)
Fp = Known Propelling Force (lbs)	C = Cycles per Hour (/hour)	E ₃ = Energy per Cycle (in lbs)
M = Total Distance Moved by Weight (inches)	s = Stroke Length of Shock Absorber (inches)	E ₄ = Energy per hour (in lbs/hour)
D = Distance Moved by Weight to Shock (inches)	F = Propelling Force at Shock Absorber (lbs)	We = Effective Weight (lbs)

V1 Weight, Vertical Free Fall Examples: Elevator Emergency Stops, Flying Shears, Test Equipment


FORMULA	EXAMPLE	
$D = (M) - (s)$	$W = 200 \text{ lbs}$	$D = (18) - (3) = 15 \text{ inches}$
$V = \sqrt{(5.4) \cdot (D) \cdot \sin(A)}$	$M = 18 \text{ inches}$	$V = \sqrt{(5.4) \cdot (15)} = 9 \text{ ft/sec}$
$F = (W) \cdot \sin(A)$	$C = 60/\text{hour}$	$F = 200$
$E_1 = (0.186) \cdot (W) \cdot (V^2)$	$s = 3 \text{ inches}$	$E_1 = (0.186) \cdot (200) \cdot (9^2) = 3,013.2 \text{ in lbs}$
$E_2 = (F) \cdot (s)$		$E_2 = (200) \cdot (3) = 600 \text{ in lbs}$
$E_3 = E_1 + E_2$		$E_3 = 3,013.2 + 600 = 3,613.2 \text{ in lbs}$
$E_4 = (E_3) \cdot (C)$		$E_4 = (3,613.2) \cdot (60) = 216,792 \text{ in lbs/h}$
$We = E_3 / (0.186) \cdot (V^2)$		$We = 3,613.2 / (0.186) \cdot (9^2) = 239.8 \text{ lbs}$



V1 - Select from Model Rating Chart: MA 4575

V2 Weight Sliding Down Incline Inclined Non-Powered Conveyor, Package Chute, Parts Transfer Ramp


$D = (M) - (s)$	$W = 1,000 \text{ lbs}$	$D = (15) - (2) = 13 \text{ inches}$
$V = \sqrt{(5.4) \cdot (D) \cdot \sin(A)}$	$M = 15 \text{ inches}$	$V = \sqrt{(5.4) \cdot (13) \cdot \sin(30)} = 5.9 \text{ ft/sec}$
$F = (W) \cdot \sin(A)$	$A = 30^\circ$	$F = 500$
$E_1 = (0.186) \cdot (W) \cdot (V^2)$	$C = 190/\text{hour}$	$E_1 = (0.186) \cdot (1,000) \cdot (5.9^2) = 6,474.7 \text{ in lbs}$
$E_2 = (F) \cdot (s)$	$s = 2 \text{ inches}$	$E_2 = (500) \cdot (2) = 1,000 \text{ in lbs}$
$E_3 = E_1 + E_2$		$E_3 = 6,474.7 + 1,000 = 7,474.7 \text{ in lbs}$
$E_4 = (E_3) \cdot (C)$		$E_4 = (7,474.7) \cdot (190) = 1,420,193 \text{ in lbs/h}$
$We = E_3 / (0.186) \cdot (V^2)$		$We = 7,474.7 / (0.186) \cdot (5.9^2) = 1,154.5 \text{ lbs}$



V2 - Select from Model Rating Chart: MCA 6450-1 or -2

V3 Down Incline with Propelling Force Inclined Conveyor Belt, High Speed Safety Doors


$F = (W) \cdot \sin(A) + (Fp)$	$W = 100 \text{ lbs}$	$F = (100) \cdot \sin(15) + (50) = 75.9 \text{ lbs}$
$E_1 = (0.186) \cdot (W) \cdot (V^2)$	$V = 2 \text{ ft/sec}$	$E_1 = (0.186) \cdot (100) \cdot (2^2) = 74.4 \text{ lbs}$
$E_2 = (F) \cdot (s)$	$Fp = 50 \text{ lbs}$	$E_2 = (75.9) \cdot (0.5) = 38 \text{ in lbs}$
$E_3 = E_1 + E_2$	$A = 15^\circ$	$E_3 = 74.4 + 38 = 112.4 \text{ in lbs}$
$E_4 = (E_3) \cdot (C)$	$C = 30/\text{hour}$	$E_4 = (112.4) \cdot (30) = 3,370.5 \text{ in lbs}$
$We = E_3 / (0.186) \cdot (V^2)$	$s = 0.5 \text{ inches}$	$We = 112.4 / (0.186) \cdot (2^2) = 151.1 \text{ lbs}$



V3 - Select from Model Rating Chart: MC 150H

V4 Up Incline With Propelling Force Elevator, Inclined Power Conveyor


$F = (Fp) - (W) \cdot \sin(A)$	$W = 450 \text{ lbs}$	$F = (600) - (450) \cdot \sin(90) = 150 \text{ lbs}$
$E_1 = (0.186) \cdot (W) \cdot (V^2)$	$V = 1 \text{ ft/sec}$	$E_1 = (0.186) \cdot (450) \cdot (1^2) = 83.7 \text{ in lbs}$
$E_2 = (F) \cdot (s)$	$Fp = 600 \text{ lbs}$	$E_2 = (150) \cdot (1) = 150 \text{ in lbs}$
$E_3 = E_1 + E_2$	$A = 90^\circ$	$E_3 = 83.7 + 150 = 234 \text{ in lbs}$
$E_4 = (E_3) \cdot (C)$	$C = 60/\text{hour}$	$E_4 = (234) \cdot (60) = 14,022 \text{ in lbs/h}$
$We = E_3 / (0.186) \cdot (V^2)$	$s = 1 \text{ inch}$	$We = 234 / (0.186) \cdot (1^2) = 1,258.1 \text{ lbs}$



V4 - Select from Model Rating Chart: MA 600 or SC 650-4

V5 Down Incline with Counter Weight Lifting Door with Counter Balance

$F = (W) \cdot \sin(A) - Wcw$	$W = 1,500 \text{ lbs}$	$F = (1,500) \cdot \sin(45) - 500 = 560.7 \text{ lbs}$
$E_1 = (0.186) \cdot (W) \cdot (V^2)$	$V = 0.5 \text{ ft/sec}$	$E_1 = (0.186) \cdot (1,500) \cdot (0.5^2) = 69.8 \text{ in lbs}$
$E_2 = (F) \cdot (s)$	$A = 45^\circ$	$E_2 = (560.7) \cdot (1) = 560.7 \text{ in lbs}$
$E_3 = E_1 + E_2$	$Wcw = 500 \text{ lbs}$	$E_3 = 69.8 + 560.7 = 630.5 \text{ in lbs}$
$E_4 = (E_3) \cdot (C)$	$C = 1/\text{hour}$	$E_4 = (630.5) \cdot (1) = 630.5 \text{ in lbs/h}$
$We = E_3 / (0.186) \cdot (V^2)$	$s = 1 \text{ inch}$	$We = 630.5 / (0.186) \cdot (0.5^2) = 13,559.1 \text{ lbs}$




V5 - Select from Model Rating Chart: ML 3325

Rotary Sizing Examples

W = Moving Weight (lbs)	T = Propelling Torque (lbs-in)	C = Cycles per Hour (/hour)
V = Impact Velocity (ft/sec)	Rs = Mounting Radius of the Shock (inches)	E ₁ = Kinetic Energy (in lbs)
Wa = Apparent Weight at Shock Absorber (lbs)	Dt = Diameter of Turntable (inches)	E ₂ = Propelling Force Energy (in lbs)
ω = Angular Velocity (°/sec)	s = Stroke length of Shock Absorber (inches)	E ₃ = Energy per Cycle (in lbs)
I = Moment of Inertia (lb-ft-sec ²)	H = Thickness of Object (inches)	E ₄ = Energy per Hour (in lbs/hour)
k = Radius of Gyration (inches)	L = Length of Object (inches)	We = Effective Weight (lbs)

R1 Moment of Inertia, Horizontal Plane

Examples: Swing Bridges, Radar Antenna



FORMULA

$$\begin{aligned}
 Wa &= (4637 \cdot I) / (Rs^2) \\
 V &= (Rs) \cdot (\omega) / 688 \\
 F &= T / Rs \\
 E_1 &= (0.186) \cdot (Wa) \cdot (V^2) \\
 E_2 &= (F) \cdot (s) \\
 E_3 &= E_1 + E_2 \\
 E_4 &= (E_3) \cdot (C) \\
 We &= E_3 / (0.186) \cdot (V^2)
 \end{aligned}$$

EXAMPLE


$$\begin{aligned}
 I &= 3,930 \text{ lb-ft-sec}^2 \\
 \omega &= 172^\circ/\text{sec} \\
 T &= 480,000 \text{ lbs-in} \\
 Rs &= 40 \text{ inches} \\
 C &= 30/\text{hour} \\
 s &= 6 \text{ inches}
 \end{aligned}$$

$$\begin{aligned}
 Wa &= (4,637 \cdot 3,930) / (40^2) = 11,390 \text{ lbs} \\
 V &= (40) \cdot (172) / 688 = 10 \text{ ft/sec} \\
 F &= 480,000 / 40 = 12,000 \text{ lbs} \\
 E_1 &= (0.186) \cdot (11,390) \cdot (10^2) = 211,854 \text{ in lbs} \\
 E_2 &= (12,000) \cdot (6) = 72,000 \text{ in lbs} \\
 E_3 &= 211,854 + 72,000 = 283,854 \text{ in lbs} \\
 E_4 &= (283,854) \cdot (30) = 8,515,620 \text{ in lbs/h} \\
 We &= 283,854 / (0.186) \cdot (10^2) = 15,260.9 \text{ lbs}
 \end{aligned}$$

R1 - Select from Model Rating Chart: CA 4 x 6-3

R2 Radius of Gyration, Horizontal Plane

Examples: Packaging Equipment, Pick-and-Place Robots



$$\begin{aligned}
 Wa &= (W) \cdot (k^2) / (Rs^2) \\
 V &= (Rs) \cdot (\omega) / 688 \\
 F &= T / Rs \\
 E_1 &= (0.186) \cdot (Wa) \cdot (V^2) \\
 E_2 &= (F) \cdot (s) \\
 E_3 &= E_1 + E_2 \\
 E_4 &= (E_3) \cdot (C) \\
 We &= E_3 / (0.186) \cdot (V^2)
 \end{aligned}$$


$$\begin{aligned}
 W &= 300 \text{ lbs} \\
 k &= 2.5 \text{ inches} \\
 \omega &= 180^\circ/\text{sec} \\
 T &= 9,000 \text{ lbs-in} \\
 Rs &= 25 \text{ inches} \\
 C &= 1,200/\text{hour} \\
 s &= 1 \text{ inches}
 \end{aligned}$$

$$\begin{aligned}
 Wa &= (300) \cdot (2.5^2) / (25^2) = 3 \text{ lbs} \\
 V &= (25) \cdot (180) / 688 = 6.54 \text{ ft/sec} \\
 F &= 9,000 / 25 = 360 \text{ lbs} \\
 E_1 &= (0.186) \cdot (3) \cdot (6.54^2) = 23.87 \text{ in lbs} \\
 E_2 &= (360) \cdot (1) = 360 \text{ in lbs} \\
 E_3 &= 23.87 + 360 = 383.87 \text{ in lbs} \\
 E_4 &= (383.87) \cdot (1,200) = 460,644 \text{ in lbs/h} \\
 We &= 383.87 / (0.186) \cdot (6.54^2) = 48.20 \text{ lbs}
 \end{aligned}$$

R2 - Select from Model Rating Chart: MC 3325-1 or MA 3325

R3 Index Table

Examples: Index Table, Rotating Work Station



$$\begin{aligned}
 Wa &= (W \cdot Rt^2) / (2 \cdot Rs^2) \\
 V &= (Rs) \cdot (\omega) / 688 \\
 F &= T / Rs \\
 E_1 &= (0.186) \cdot (Wa) \cdot (V^2) \\
 E_2 &= (F) \cdot (s) \\
 E_3 &= E_1 + E_2 \\
 E_4 &= (E_3) \cdot (C) \\
 We &= E_3 / (0.186) \cdot (V^2)
 \end{aligned}$$


$$\begin{aligned}
 W &= 195 \text{ lbs} \\
 Dt &= 40 \text{ inches} \\
 \omega &= 85^\circ/\text{sec} \\
 T &= 1,700 \text{ lbs-in} \\
 Rs &= 15 \text{ inches} \\
 C &= 60/\text{hour} \\
 s &= .75 \text{ inches}
 \end{aligned}$$

$$\begin{aligned}
 Wa &= (195 \cdot 20^2) / (2 \cdot 15^2) = 173.3 \text{ lbs} \\
 V &= (15) \cdot (85) / 688 = 1.85 \text{ ft/sec} \\
 F &= 1,700 / 15 = 113.3 \text{ lbs} \\
 E_1 &= (0.186) \cdot (173.3) \cdot (1.85^2) = 110.3 \text{ in lbs} \\
 E_2 &= (113.3) \cdot (0.75) = 85 \text{ in lbs} \\
 E_3 &= 110.3 + 85 = 195.3 \text{ in lbs} \\
 E_4 &= (195.3) \cdot (60) = 11,718 \text{ in lbs/h} \\
 We &= 195.3 / (0.186) \cdot (1.85^2) = 306.8 \text{ lbs}
 \end{aligned}$$

R3 - Select from Model Rating Chart: SC 300-4 or MC 225H

R4 Turnover

Examples: Roll-Over Device, Paint Booths, Crate Handling



$$\begin{aligned}
 Wa &= (W) \cdot (H^2 + L^2) / (12 \cdot Rs^2) \\
 V &= (Rs) \cdot (\omega) / 688 \\
 F &= T / Rs \\
 E_1 &= (0.186) \cdot (Wa) \cdot (V^2) \\
 E_2 &= (F) \cdot (s) \\
 E_3 &= E_1 + E_2 \\
 E_4 &= (E_3) \cdot (C) \\
 We &= E_3 / (0.186) \cdot (V^2)
 \end{aligned}$$


$$\begin{aligned}
 W &= 150 \text{ lbs} \\
 L &= 38 \text{ inches} \\
 H &= 1 \text{ inch} \\
 \omega &= 70^\circ/\text{sec} \\
 T &= 15,000 \text{ lbs-in} \\
 Rs &= 12 \text{ inches} \\
 C &= 500/\text{hour} \\
 s &= 1 \text{ inches}
 \end{aligned}$$

$$\begin{aligned}
 Wa &= (150) \cdot (1^2 + 38^2) / (12 \cdot 12^2) = 125.43 \text{ lbs} \\
 V &= (12) \cdot (70) / 688 = 1.22 \text{ ft/sec} \\
 F &= 15,000 / 12 = 1,250 \text{ lbs} \\
 E_1 &= (0.186) \cdot (125.43) \cdot (1.22^2) = 34.72 \text{ in lbs} \\
 E_2 &= (1,250) \cdot (1) = 1,250 \text{ in lbs} \\
 E_3 &= 34.72 + 1,250 = 1,284.72 \text{ in lbs} \\
 E_4 &= (1,284.72) \cdot (500) = 642,362 \text{ in lbs/h} \\
 We &= 1,284.72 / (0.186) \cdot (1.22^2) = 4,640.6 \text{ lbs}
 \end{aligned}$$

R4 - Select from Model Rating Chart: MC 4525-4 or MA 4525

R5 Uniform Bar, Horizontal Plane

Examples: Swinging Beam, Robotic Arm



$$\begin{aligned}
 Wa &= (W) \cdot (H^2 + L^2) / (12 \cdot Rs^2) \\
 V &= (Rs) \cdot (\omega) / 688 \\
 F &= T / Rs \\
 E_1 &= (0.186) \cdot (Wa) \cdot (V^2) \\
 E_2 &= (F) \cdot (s) \\
 E_3 &= E_1 + E_2 \\
 E_4 &= (E_3) \cdot (C) \\
 We &= E_3 / (0.186) \cdot (V^2)
 \end{aligned}$$

$$\begin{aligned}
 W &= 75 \text{ lbs} \\
 L &= 30 \text{ inches} \\
 H &= 2 \text{ inches} \\
 \omega &= 180^\circ/\text{sec} \\
 T &= 9,000 \text{ lbs-in} \\
 Rs &= 15 \text{ inches} \\
 C &= 100/\text{hour} \\
 s &= 1 \text{ inch}
 \end{aligned}$$

$$\begin{aligned}
 Wa &= (75) \cdot (2^2 + 30^2) / (12 \cdot 15^2) = 100.1 \text{ lbs} \\
 V &= (15) \cdot (180) / 688 = 3.92 \text{ ft/sec} \\
 F &= 9,000 / 15 = 600 \text{ lbs} \\
 E_1 &= (0.186) \cdot (100.1) \cdot (3.92^2) = 286.1 \text{ in lbs} \\
 E_2 &= (600) \cdot (1) = 600 \text{ in lbs} \\
 E_3 &= 286.1 + 600 = 886.1 \text{ in lbs} \\
 E_4 &= (886.1) \cdot (100) = 88,610 \text{ in lbs/h} \\
 We &= 886.1 / (0.186) \cdot (3.92^2) = 310 \text{ lbs}
 \end{aligned}$$

R5 - Select from Model Rating Chart: MC 4525-2 or MA 4525

W = Moving Weight (lbs)	T = Propelling Torque (lbs in)	E _k = Kinetic Energy (in lbs)
H = Thickness of Door or Arm (inches)	Θ = Angle from the Vertical (°)	E _p = Propelling Force Energy (in lbs)
L = Length of Door or Arm (inches)	C = Cycles per Hour (/hour)	E _c = Energy per Cycle (in lbs)
d = Distance from Pivot to c of g (inches)	s = Stroke Length of Shock Absorber (inches)	E _h = Energy per Hour (in lbs/hour)
Rs = Mounting Radius of Shock Absorbers (inches)	F = Propelling Force at Shock Absorber (lbs)	We = Effective Weight (lbs)
ω = Rotational Speed of Weight (°/sec)		

R6 Uniform Bar, Vertical Plane

Examples: Cross-Conveyor Transfer, Gantry Walkway


FORMULA

$$\begin{aligned} W_a &= (W) \cdot (H^2 + 4 \cdot L^2) / 12 \cdot (Rs^2) \\ V &= (Rs) \cdot (\omega) / 688 \\ F &= [T + 5 \cdot L \cdot W \cdot \sin(\Theta)] / Rs \\ E_1 &= (0.186) \cdot (W_a) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_4 / (0.186) \cdot (V^2) \end{aligned}$$

EXAMPLE

$$\begin{aligned} W &= 5 \text{ lbs} \\ H &= .25 \text{ inches} \\ L &= 6 \text{ inches} \\ \Theta &= 87.6^\circ \\ \omega &= 360^\circ/\text{sec} \\ T &= 20 \text{ lbs-in} \\ Rs &= 6 \text{ inches} \\ C &= 1,800/\text{hour} \\ s &= .25 \text{ inches} \end{aligned}$$

$$\begin{aligned} W_a &= (5) \cdot (.25^2 + 4 \cdot 6^2) / 12 \cdot (6^2) = 1.7 \text{ lbs} \\ V &= (6) \cdot (360) / 688 = 3.1 \text{ ft/sec} \\ F &= [20 + 5 \cdot 6 \cdot 5 \cdot \sin(87.6)] / 6 = 5.8 \text{ lbs} \\ E_1 &= (0.186) \cdot (1.7) \cdot (3.1^2) = 3.0 \text{ in lbs} \\ E_2 &= (5.8) \cdot (.25) = 1.5 \text{ in lbs} \\ E_3 &= 3.0 + 1.5 = 4.5 \text{ in lbs} \\ E_4 &= 4.5 \cdot (1,800) = 8,100 \text{ in lbs/h} \\ We &= 4.5 / (0.186) \cdot (3.1^2) = 2.5 \text{ lbs} \end{aligned}$$



R6 - Select from Model Rating Chart: MC 25L


R7 Door, Horizontal Plane

Examples: Cabinet Doors, Machine Enclosures

$$\begin{aligned} W_a &= (W) \cdot (H^2 + L^2) / (3 \cdot Rs^2) \\ V &= (Rs) \cdot (\omega) / 688 \\ F &= T / Rs \\ E_1 &= (0.186) \cdot (W_a) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_4 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 120 \text{ lbs} \\ H &= 1 \text{ inch} \\ L &= 42 \text{ inches} \\ \omega &= 60^\circ/\text{sec} \\ T &= 1,800 \text{ lbs-in} \\ Rs &= 10 \text{ inches} \\ C &= 4/\text{hour} \\ s &= .5 \text{ inches} \end{aligned}$$

$$\begin{aligned} W_a &= (120) \cdot (1^2 + 42^2) / (3 \cdot 10^2) = 706 \text{ lbs} \\ V &= (10) \cdot (60) / 688 = .9 \text{ ft/sec} \\ F &= 1,800 / 10 = 180 \text{ lbs} \\ E_1 &= (0.186) \cdot (706) \cdot (.9^2) = 106.4 \text{ in lbs} \\ E_2 &= (180) \cdot (.5) = 90 \text{ in lbs} \\ E_3 &= 106.4 + 90 = 196.4 \text{ in lbs} \\ E_4 &= (196.4) \cdot (4) = 785 \text{ in lbs/h} \\ We &= 196.4 / (0.186) \cdot (.9^2) = 1,303.6 \text{ lbs} \end{aligned}$$



R7 - Select from Model Rating Chart: MC 225H2

R8 Door, Vertical Plane


Examples: Hatches, Lids, Hoods

$$\begin{aligned} W_a &= (W) \cdot (H^2 + L^2) / (3 \cdot Rs^2) \\ V &= (Rs) \cdot (\omega) / 688 \\ F^* &= [T + 5 \cdot L \cdot W \cdot \sin(\Theta)] / Rs \\ E_1 &= (0.186) \cdot (W_a) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_4 / (0.186) \cdot (V^2) \end{aligned}$$

*Force is approximate

$$\begin{aligned} W &= 60 \text{ lbs} \\ H &= 1 \text{ inch} \\ L &= 10 \text{ inches} \\ \Theta &= 150^\circ \\ \omega &= 200^\circ/\text{sec} \\ T &= 45 \text{ lbs-in} \\ Rs &= 10 \text{ inches} \\ C &= 1,900/\text{hour} \\ s &= .63 \text{ inches} \end{aligned}$$

$$\begin{aligned} W_a &= (60) \cdot (1^2 + 10^2) / (3 \cdot 10^2) = 20.2 \text{ lbs} \\ V &= (10) \cdot (200) / 688 = 2.9 \text{ ft/sec} \\ F &= [45 + 5 \cdot 10 \cdot 60 \cdot \sin(150)] / 10 = 19.5 \text{ lbs} \\ E_1 &= (0.186) \cdot (20.2) \cdot (2.9^2) = 31.6 \text{ in lbs} \\ E_2 &= (19.5) \cdot (0.63) = 12.3 \text{ in lbs} \\ E_3 &= 34 + 12.3 = 43.9 \text{ in lbs} \\ E_4 &= (43.9) \cdot (1,900) = 83,382 \text{ in lbs/h} \\ We &= 43.9 / (0.186) \cdot (2.9^2) = 28.1 \text{ lbs} \end{aligned}$$



R8 - Select from Model Rating Chart: SC 190-2


R9 Weight at Radius, Horizontal Plane

Examples: Circuit Breakers, Swinging Gates

$$\begin{aligned} W_a &= (W) \cdot (d^2) / (Rs^2) \\ V &= (Rs) \cdot (\omega) / 688 \\ F &= T / Rs \\ E_1 &= (0.186) \cdot (W_a) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_4 / (0.186) \cdot (V^2) \end{aligned}$$

$$\begin{aligned} W &= 40 \text{ lbs} \\ d &= 8 \text{ inches} \\ \omega &= 110^\circ/\text{sec} \\ T &= 150 \text{ lbs-in} \\ Rs &= 7 \text{ inches} \\ C &= 1,500/\text{hour} \\ s &= .5 \text{ inches} \end{aligned}$$

$$\begin{aligned} W_a &= (40) \cdot (8^2) / (7^2) = 52 \text{ lbs} \\ V &= (7) \cdot (110) / 688 = 1.1 \text{ ft/sec} \\ F &= 150 / 7 = 21 \text{ lbs} \\ E_1 &= (0.186) \cdot (52) \cdot (1.1^2) = 11.7 \text{ in lbs} \\ E_2 &= (21) \cdot (.4) = 8.4 \text{ in lbs} \\ E_3 &= 11.7 + 8.4 = 20.1 \text{ in lbs} \\ E_4 &= (20.1) \cdot (1,500) = 30,150 \text{ in lbs/h} \\ We &= 20.1 / (0.186) \cdot (1.1^2) = 89.3 \text{ lbs} \end{aligned}$$



R9 - Select from Model Rating Chart: MA 35

R10 Weight at Radius, Vertical Plane


Examples: Impact Testers, Pendulums

$$\begin{aligned} W_a &= (W) \cdot (d^2) / (Rs^2) \\ V &= (Rs) \cdot (\omega) / 688 \\ F^* &= [T + W \cdot d \cdot \sin(\Theta)] / Rs \\ E_1 &= (0.186) \cdot (W_a) \cdot (V^2) \\ E_2 &= (F) \cdot (s) \\ E_3 &= E_1 + E_2 \\ E_4 &= (E_3) \cdot (C) \\ We &= E_4 / (0.186) \cdot (V^2) \end{aligned}$$

*Force is approximate

$$\begin{aligned} W &= 40 \text{ lbs} \\ d &= 8 \text{ inches} \\ \Theta &= 90^\circ \\ \omega &= 110^\circ/\text{sec} \\ T &= 150 \text{ lbs-in} \\ Rs &= 7 \text{ inches} \\ C &= 1,500/\text{hour} \\ s &= .5 \text{ inches} \end{aligned}$$

$$\begin{aligned} W_a &= (40) \cdot (8^2) / (7^2) = 52 \text{ lbs} \\ V &= (7) \cdot (110) / 688 = 1.1 \text{ ft/sec} \\ F &= [150 + 40 \cdot 8 \cdot \sin(90)] / 7 = 67 \text{ lbs} \\ E_1 &= (0.186) \cdot (52) \cdot (1.1^2) = 11.7 \text{ in lbs} \\ E_2 &= (67) \cdot (.5) = 33.5 \text{ in lbs} \\ E_3 &= 11.7 + 33.5 = 45.2 \text{ in lbs} \\ E_4 &= (45.2) \cdot (1,500) = 67,800 \text{ in lbs/h} \\ We &= 45.2 / (1.1^2) = 200.8 \text{ lbs} \end{aligned}$$



R10 - Select from Model Rating Chart: MC 150H

1. Ace Shock Absorbers for Pneumatic Cylinders


- For:
- optimum deceleration
 - higher speeds
 - smaller cylinders
 - reduced air consumption
 - smaller valves and pipework

Example: MA 3350 M-Z
-Z = cylinder mounting




With heavy loads or high velocities normal cylinder cushions are often overloaded. This causes shock loading leading to premature cylinder failure or excessive maintenance. Using oversized cylinders to withstand this shock loading is not the best solution since this considerably increases air consumption and costs.

2. Side Load Adapter for High Side Load Angles

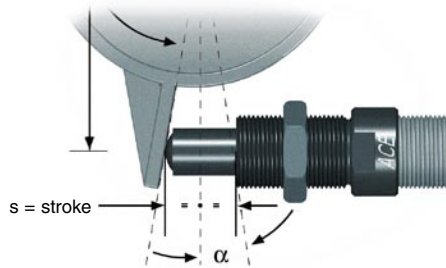


The side loading is removed from the shock absorber piston rod leading to considerably longer life. Wherever possible mount shock absorber so that impacting face is perpendicular to shock absorber axis half way through stroke. See pages 44 and 45 for more details.

3. Undamped Free Travel with Damped End Extension



The lever 1 swings with the pin 2 in a slotted hole around pivot point 3. The lever is smoothly decelerated at the extreme end of its travel.


4. One Shock Absorber for Both Ends of Travel

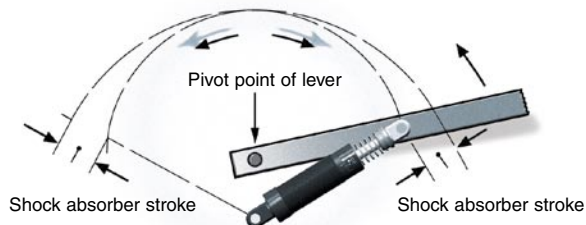


It is possible to use only one shock absorber for both end positions by using different pivot points as shown.

Tip: Leave approx. 0.06 in (1.5 mm) of shock absorber stroke free at each end of travel.

5. Double Acting Shock Absorber



6. Air Bleed Collar




By using this air bleed collar the operating lifetime of shock absorbers in aggressive environments can be considerably increased. The adapter protects the shock absorber seals from cutting fluids, cleaning agents, cooking oils etc. by using a low pressure air bleed.

Available for VC and VCL feed controls and select shock absorbers.

7. Double Stroke Length

50 % lower reaction force (Q) 50 % lower deceleration (a)

By driving 2 shock absorbers against one another 'nose-to-nose', the effective stroke length can be doubled.

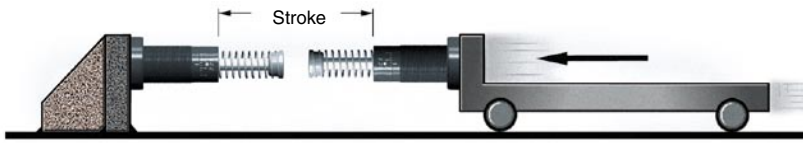


8. Ride Over Latch

8.1



8.2

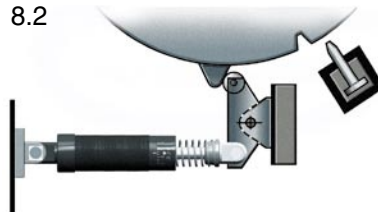


8.1 The latch absorbs the kinetic energy so that the object contacts the fixed stop gently.

8.2 The latch absorbs the rotational energy of the turntable etc. The turntable can then be held in the datum position with a lock bolt or similar device.


9. Rotary Actuator or Rack and Pinion Drive

The use of ACE shock absorbers allows higher operating speeds and weights as well as protecting the drive mechanism and housing from shock loads.

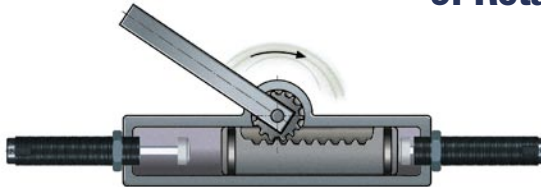


10. Adjustable Stop Clamp e.g. for Handling Equipment

The gentle deceleration of ACE shock absorbers makes the use of adjustable stop clamps possible and removes any chance of the clamp slipping. The kinetic energy is completely removed before the mechanical stop is reached thus making high index speeds possible.

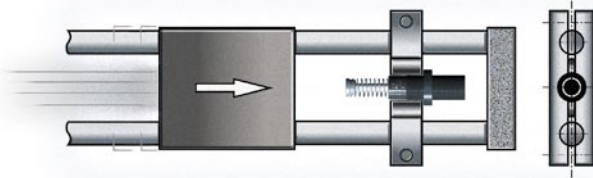


11. Ride-Over Latch e.g. Fire Door

The fire door travels quickly until it reaches the lever. It is then gently decelerated by the lever mounted shock absorber and closes without shock or danger to personnel.

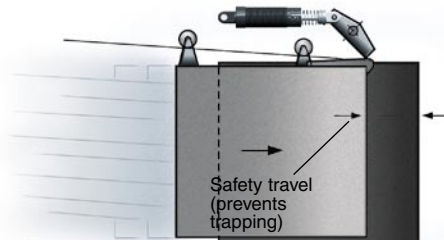

12. Increasing Stroke Length Mechanically


By means of a lever the effective stroke length can be increased and mounting space to the left reduced.




Application Examples for Shock Absorbers

**As System Components in Integrated Handling Equipment,
Overhead Cranes, Storage and Retrieval Systems**

16

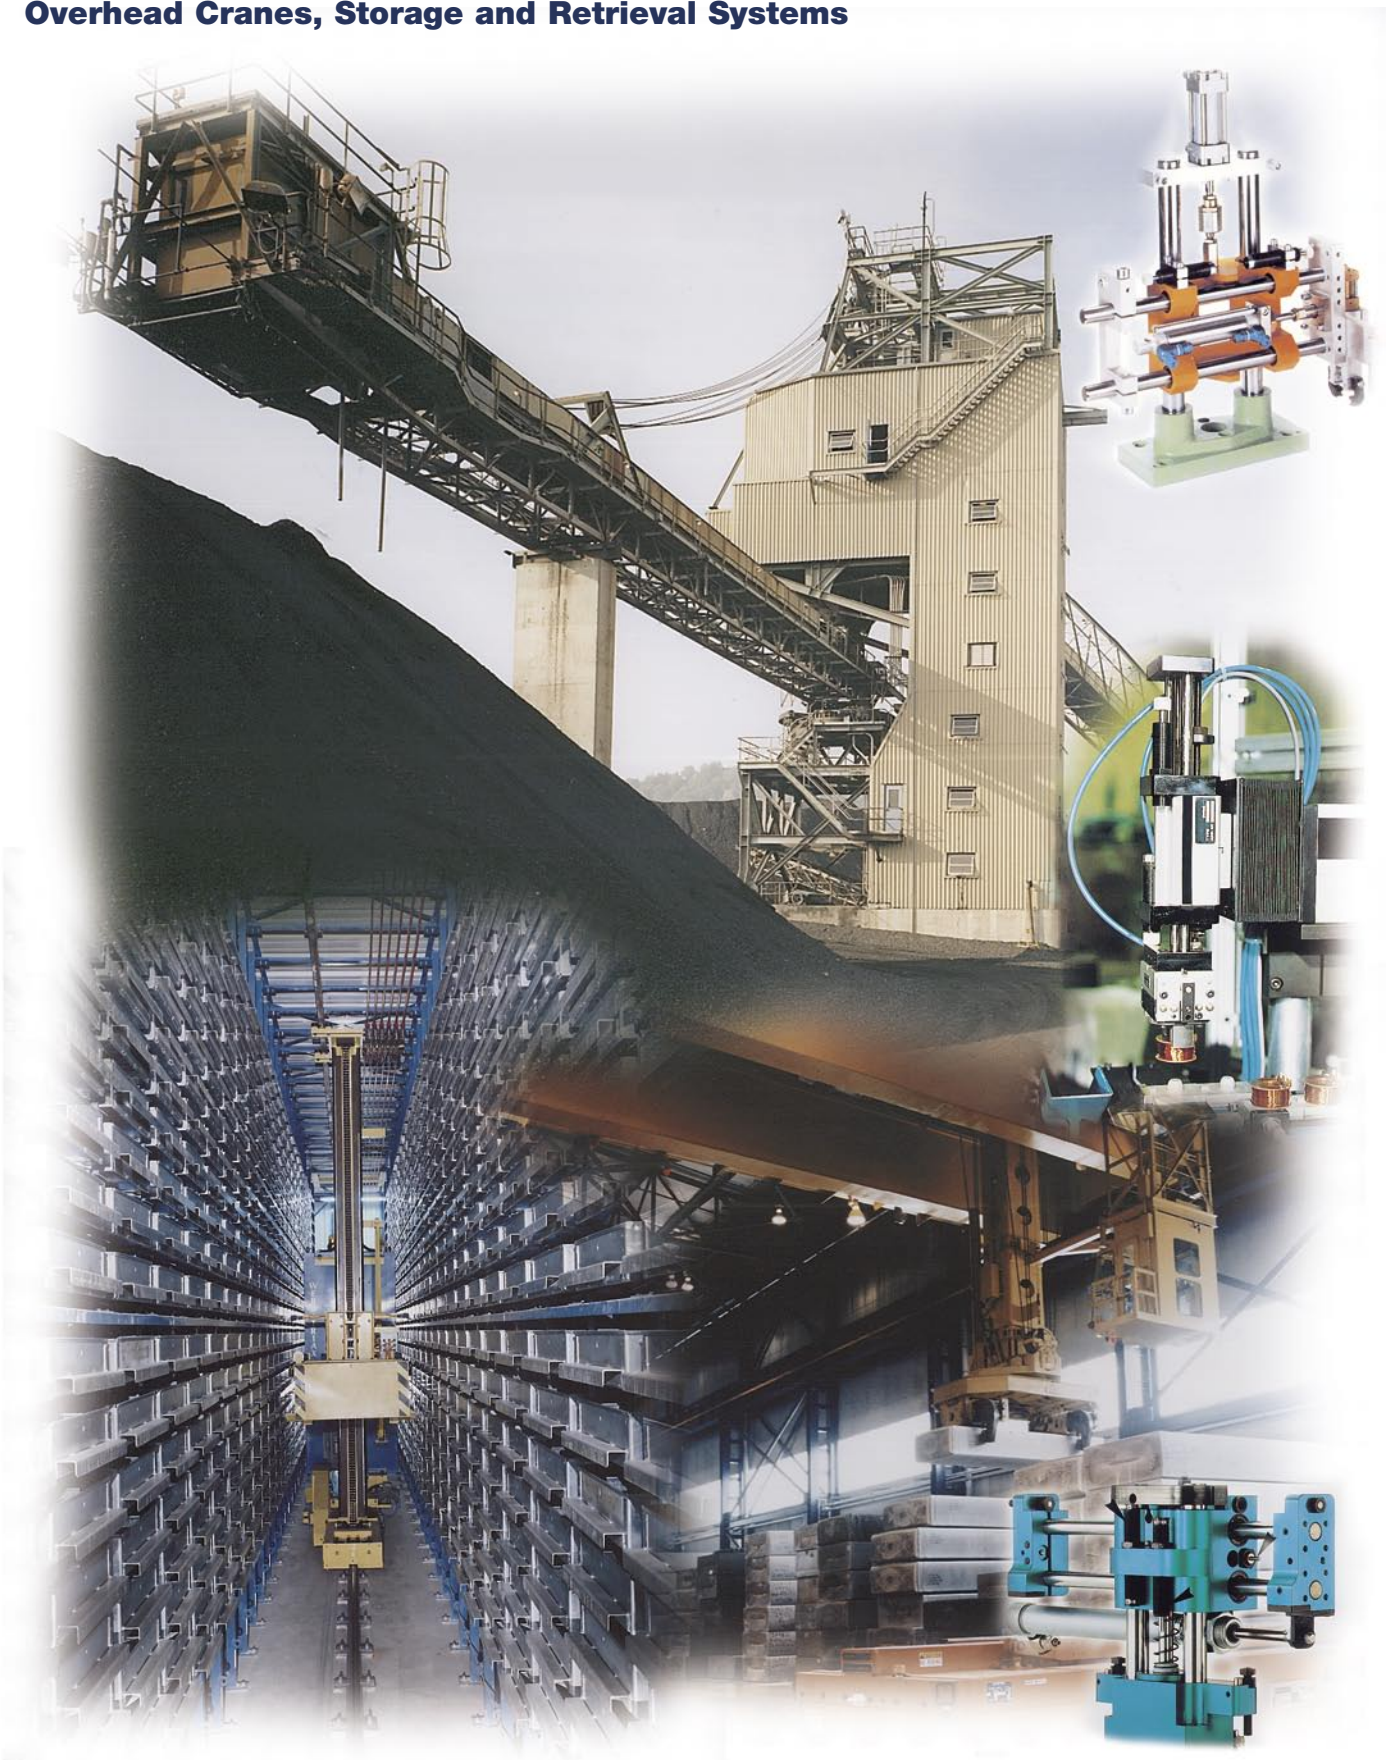


Pneumatic Rotary Actuators with Integral Shock Absorbers

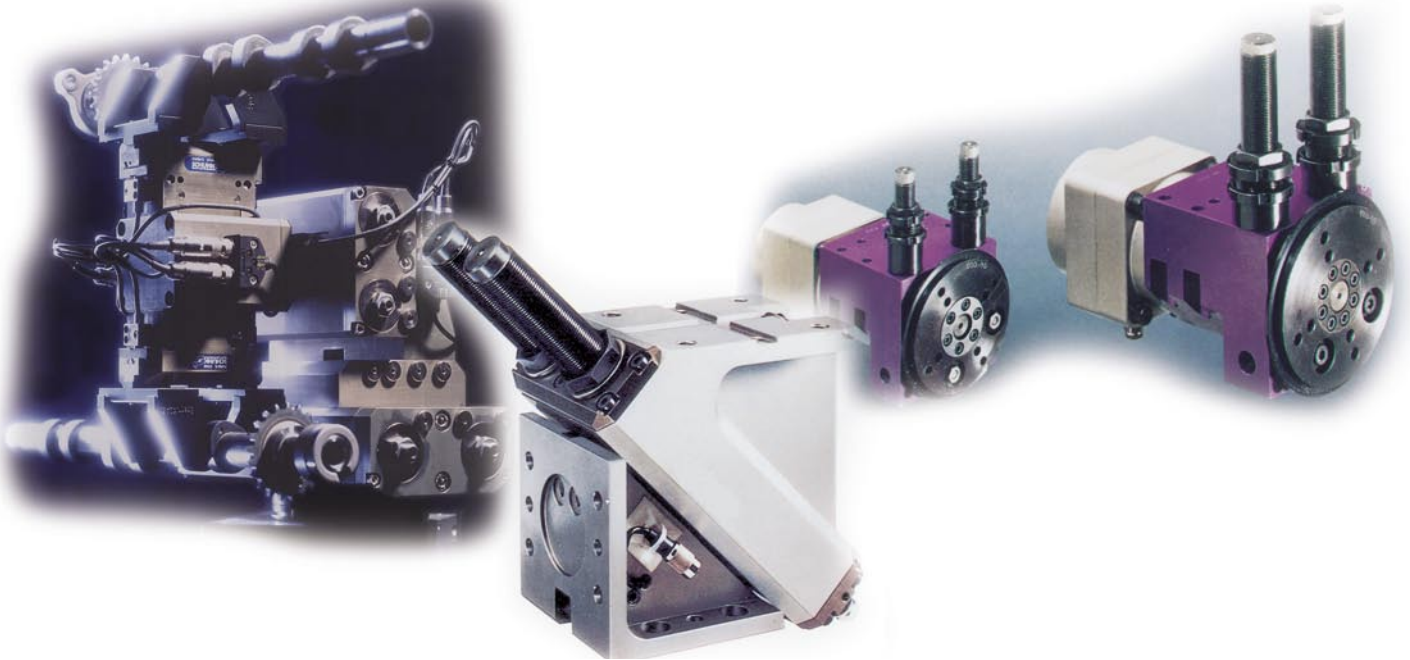

17

Slide Units

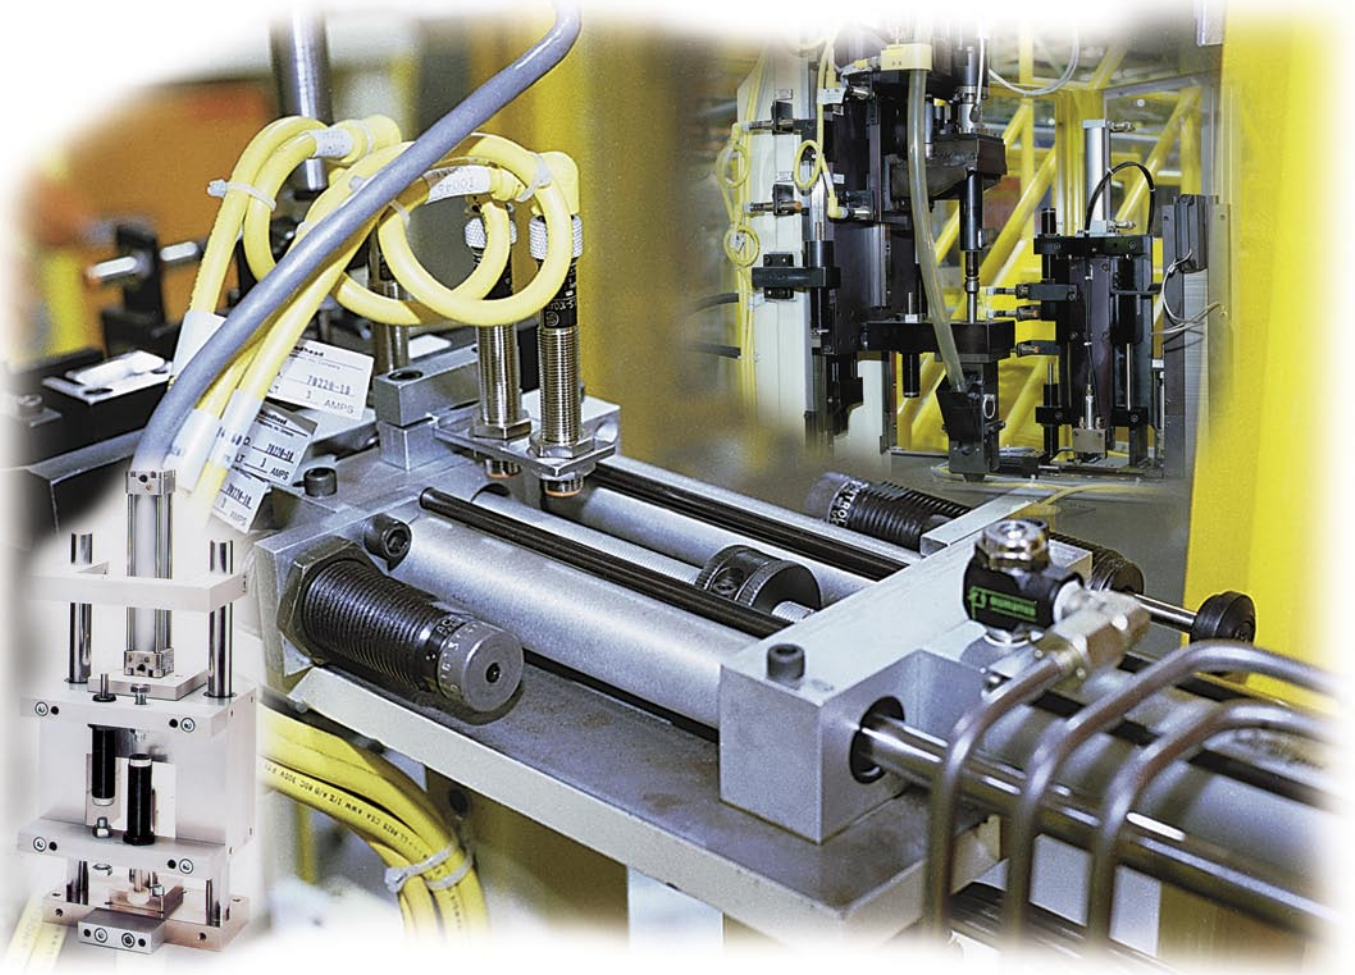

Model Rating Charts

Industrial Shock Absorbers are rated by capacity for the purpose of selecting the proper unit for an application's energy requirements. Ratings are determined by the effective weight that the shock absorber can stop and the energy it can absorb per cycle and per hour. These ratings relate to the mechanical and thermal capacity of a shock absorber because the mechanical energy is converted to heat and dissipated.

Self-Compensating Models

Model Number	Stroke inches 1 inch = 25.4 mm	E3 Max Energy per Cycle, inch lbs 1 in lb = .11 Nm	We Effective Weight lbs, 1 lb = .45 kg	E4 Max Energy per hour, in lbs/hour 1 in lb/hour = .11 Nm/hour			Product Catalog Page
				Self-Contained	A/O Tank	A/O Re-circulating	
MC 9-1	0.20	9	1.35-7.0	18,000			23
MC 9-2	0.20	9	1.75-9.0	18,000			23
MC 10 L	0.20	4	0.75-6.0	35,000			23
MC 10 H	0.20	7	1.5-11	35,000			23
MC 25 L	0.25	20	1.5-5	120,000			23
MC 25	0.25	20	4-12	120,000			23
MC 25 H	0.25	20	10-30	120,000			23
MC 30-1	0.32	31	1.0-4.30	50,000			23
MC 30-2	0.32	31	3.97-11.90	50,000			23
MC 30-3	0.32	31	11.02-33.07	50,000			23
MC 75-1	0.40	75	0.5-2.5	250,000			23
MC 75-2	0.40	75	2-14	250,000			23
MC 75-3	0.40	75	6-80	250,000			23
MC 150	0.50	175	2-22	300,000			25
MC 150H	0.50	175	20-200	300,000			25
MC 150H2	0.50	175	150-450	300,000			25
MC 225	0.50	360	5-55	400,000			25
MC 225H	0.50	360	50-500	400,000			25
MC 225H2	0.50	360	400-2,000	400,000			25
MC 600	1.00	1,200	20-300	600,000			25
MC 600H	1.00	1,200	250-2,500	600,000			25
MC 600H2	1.00	1,200	880-5,000	600,000			25
SC 25-5	0.32	89	2.2-11	142,000			29
SC 25-6	0.32	89	9-97	142,000			29
SC 25-7	0.32	89	93-1,100	142,000			29
SC 75-5	0.39	142	2.2-18	226,000			29
SC 75-6	0.39	142	15-172	226,000			29
SC 75-7	0.39	142	165-1,760	226,000			29
SC 190-1	0.63	225	3-15	300,000			27
SC 190-2	0.63	225	8-40	300,000			27
SC 190-3	0.63	225	20-100	300,000			27
SC 190-4	0.63	225	50-225	300,000			27
SC 190-5	0.47	274	4-35	443,000			29
SC 190-6	0.47	274	29-309	443,000			29
SC 190-7	0.47	274	300-3,400	443,000			29
SC 300-1	0.75	300	3-18	400,000			27
SC 300-2	0.75	300	10-60	400,000			27
SC 300-3	0.75	300	30-180	400,000			27
SC 300-4	0.75	300	70-450	400,000			27
SC 300-5	0.59	650	25-100	400,000			31
SC 300-6	0.59	650	75-300	400,000			31
SC 300-7	0.59	650	200-400	400,000			31
SC 300-8	0.59	620	300-1,500	400,000			31
SC 300-9	0.59	620	700-4,300	400,000			31
SC 650-1	1.00	650	17-100	600,000			27
SC 650-2	1.00	650	50-300	600,000			27
SC 650-3	1.00	650	150-900	600,000			27
SC 650-4	1.00	650	450-2,600	600,000			27
SC 650-5	0.91	1,860	50-250	600,000			31
SC 650-6	0.91	1,860	200-800	600,000			31
SC 650-7	0.91	1,860	700-2,400	600,000			31
SC 650-8	0.91	1,860	1,700-5,800	600,000			31
SC 650-9	0.91	1,860	4,000-14,000	600,000			31
SC 925-1	1.58	975	200-800	800,000			27
SC 925-2	1.58	975	700-2,400	800,000			27
SC 925-3	1.58	975	1,700-5,800	800,000			27
SC 925-4	1.58	975	4,000-14,000	800,000			27

SC High-Cycle Self-Compensating Models

Model Number	Stroke inches 1 inch = 25.4 mm	E3 Max Energy per Cycle, inch lbs 1 in lb = .11 Nm	We Effective Weight lbs, 1 lb = .45 kg	E4 Max Energy per hour, in lbs/hour 1 in lb/hour = .11 Nm/hour			Product Catalog Page
				Self-Contained	A/O Tank	A/O Re-circulating	
SC 25M5-HC	0.16	20	2.2-11	142,000			33
SC 25M6-HC	0.16	20	9-97	142,000			33
SC 25M7-HC	0.16	20	93-1,100	142,000			33
SC 75M5-HC	0.20	75	2.2-18	226,000			33
SC 75M6-HC	0.20	75	15-172	226,000			33
SC 75M7-HC	0.20	75	165-1,760	226,000			33
SC 190M5-HC	0.50	175	4-35	443,000			33
SC 190M6-HC	0.50	175	29-309	443,000			33
SC 190M7-HC	0.50	175	300-3,400	443,000			33
SC 300-5-HC	0.33	360	25-100	400,000			35
SC 300-6-HC	0.33	360	75-300	400,000			35
SC 300-7-HC	0.33	360	200-400	400,000			35
SC 300-8-HC	0.33	360	300-1,500	400,000			35
SC 300-9-HC	0.33	360	700-4,300	400,000			35
SC 650-5-HC	0.59	1,200	30-200	600,000			35
SC 650-6-HC	0.59	1,200	90-600	600,000			35
SC 650-7-HC	0.59	1,200	250-1,600	600,000			35
SC 650-8-HC	0.59	1,200	750-4,600	600,000			35
SC 650-9-HC	0.59	1,200	50-250	600,000			35



Self-Compensating Models Continued

Model Number	Stroke inches 1 inch = 25.4 mm	E3 Max Energy per Cycle, inch lbs 1 in lb = .11 Nm	We Effective Weight lbs, 1 lb = .45 kg	Self-Contained	E4 Max Energy per hour, in lbs/hour 1 in lb/hour = .11 Nm/hour A/O Tank	A/O Re-circulating	Product Catalog Page
MC 3325-1	0.91	1,350	20-80	670,000	1,100,000	1,500,000	49
MC 3325-2			68-272				
MC 3325-3			230-920				
MC 3325-4			780-3,120				
MC 3350-1	1.91	2,700	40-160	760,000	1,200,000	1,600,000	49
MC 3350-2			136-544				
MC 3350-3			460-1,840				
MC 3350-4			1,560-6,240				
MC 3625-1	0.91	1,350	20-80	670,000	1,100,000	1,500,000	49
MC 3625-2			68-272				
MC 3625-3			230-920				
MC 3625-4			780-3,120				
MC 3650-1	1.91	2,700	40-160	760,000	1,200,000	1,600,000	49
MC 3650-2			136-544				
MC 3650-3			460-1,840				
MC 3650-4			1,560-6,240				
MC 4525-1	0.91	3,000	50-200	950,000	1,400,000	1,700,000	51
MC 4525-2			170-680				
MC 4525-3			575-2,300				
MC 4525-4			1,950-7,800				
MC 4550-1	1.91	6,000	100-400	1,000,000	1,700,000	2,200,000	51
MC 4550-2			340-1,360				
MC 4550-3			1,150-4,600				
MC 4550-4			3,900-15,600				
MC 4575-1	2.91	9,000	150-600	1,300,000	2,000,000	2,500,000	51
MC 4575-2			510-2,040				
MC 4575-3			1,730-6,920				
MC 4575-4			5,850-23,400				
MC 6450-1	1.91	15,000	300-1,200	1,300,000	2,600,000	3,400,000	53
MC 6450-2			1,020-4,080				
MC 6450-3			3,460-13,840				
MC 6450-4			11,700-46,800				
MC 64100-1	3.91	30,000	600-2,400	1,700,000	3,400,000	4,400,000	53
MC 64100-2			2,040-8,160				
MC 64100-3			6,920-27,680				
MC 64100-4			23,400-93,600				
MC 64150-1	5.91	45,000	900-3,600	2,200,000	4,400,000	5,700,000	53
MC 64150-2			3,060-12,240				
MC 64150-3			10,380-41,520				
MC 64150-4			35,100-140,400				
CA 2x2-1	2.0	32,000	1,600-4,800	9,600,000	12,000,000	15,600,000	63
CA 2x2-2			4,000-12,000				
CA 2x2-3			10,000-30,000				
CA 2x2-4			25,000-75,000				
CA 2x4-1	4.00	64,000	3,200-9,600	12,000,000	15,000,000	19,500,000	63
CA 2x4-2			8,000-24,000				
CA 2x4-3			20,000-60,000				
CA 2x4-4			50,000-150,000				
CA 2x6-1	6.00	96,000	4,800-14,400	14,400,000	18,000,000	23,500,000	63
CA 2x6-2			12,000-36,000				
CA 2x6-3			30,000-90,000				
CA 2x6-4			75,000-225,000				
CA 2x8-1	8.00	128,000	6,400-19,200	16,800,000	21,000,000	27,000,000	63
CA 2x8-2			16,000-48,000				
CA 2x8-3			40,000-120,000				
CA 2x8-4			100,000-300,000				
CA 2x10-1	10.00	160,000	8,000-24,000	19,200,000	24,000,000	31,000,000	63
CA 2x10-2			20,000-60,000				
CA 2x10-3			50,000-150,000				
CA 2x10-4			125,000-375,000				
CA 3x5-1	5.00	125,000	6,400-19,200	20,000,000	25,000,000	32,500,000	63
CA 3x5-2			16,000-48,000				
CA 3x5-3			40,000-120,000				
CA 3x5-4			100,000-300,000				
CA 3x8-1	8.00	200,000	10,240-30,720	32,000,000	40,000,000	52,000,000	63
CA 3x8-2			25,600-76,800				
CA 3x8-3			64,000-192,000				
CA 3x8-4			160,000-480,000				
CA 3x12-1	12.00	300,000	15,360-46,080	48,000,000	60,000,000	78,000,000	63
CA 3x12-2			38,400-115,200				
CA 3x12-3			96,000-288,000				
CA 3x12-4			240,000-720,000				
4x6-3	6.00	420,000	8,000-19,000	27,000,000	45,000,000	58,000,000	67
4x6-5	6.00	420,000	19,000-41,000	27,000,000	45,000,000	58,000,000	67
4x6-7	6.00	420,000	41,000-94,000	27,000,000	45,000,000	58,000,000	67
4x8-3	8.00	560,000	11,000-25,000	30,000,000	50,000,000	65,000,000	67
4x8-5	8.00	560,000	25,000-55,000	30,000,000	50,000,000	65,000,000	67
4x8-7	8.00	560,000	55,000-125,000	30,000,000	50,000,000	65,000,000	67
4x16-3	16.00	1,120,000	22,000-50,000	50,000,000	85,000,000	110,000,000	67
4x16-5	16.00	1,120,000	50,000-110,000	50,000,000	85,000,000	110,000,000	67
4x16-7	16.00	1,120,000	110,000-250,000	50,000,000	85,000,000	110,000,000	67

Model Rating Charts

Adjustable Models

Model Number	Stroke inches 1 inch = 25.4 mm	E3 Max Energy per Cycle, inch lbs 1 in lb = .11 Nm	We Effective Weight lbs, 1 lb = .45 kg	E4 Max Energy per hour, in lbs/hour 1 in lb/hour = .11 Nm/hour			Product Catalog Page
				Self-Contained	A/O Tank	A/O Re-circulating	
MA 30	0.32	31	0.5-31	50,000			37
MA 35	0.40	35	13-125	53,000			37
MA 50	0.28	50	10-45	120,000			37
MA 150	0.50	200	2-240	300,000			37
MA 225	0.75	225	5-500	400,000			37
MA 600	1.00	600	20-3,000	600,000			37
MA 900	1.58	900	30-4,500	800,000			37
MA 3325	0.91	1,500	20-3,800	670,000	1,100,000	1,500,000	49
MA 3350	1.91	3,000	28-5,400	760,000	1,200,000	1,600,000	49
MA 3625	0.91	1,500	20-3,800	670,000	1,100,000	1,500,000	49
MA 3650	1.91	3,000	28-5,400	760,000	1,200,000	1,600,000	49
MA 4525	0.91	3,450	95-22,000	950,000	1,400,000	1,700,000	51
MA 4550	1.91	6,900	150-32,000	1,000,000	1,700,000	2,200,000	51
MA 4575	2.91	10,350	155-33,000	1,300,000	2,000,000	2,500,000	51
MA 6450	1.91	18,000	480-110,000	1,300,000	2,600,000	3,400,000	53
MA 64100	3.91	36,000	600-115,000	1,700,000	3,400,000	4,400,000	53
MA 64150	5.91	54,000	730-175,000	2,200,000	4,400,000	5,700,000	53
AS 3/8x1	1.00	600	10-1,250	600,000			39
1-1/2x2	2.00	21,000	430-70,000	3,200,000	4,000,000	5,200,000	59
1-1/2x3-1/2	3.50	36,750	480-80,000	5,600,000	7,000,000	9,100,000	59
1-1/2x5	5.00	52,500	500-90,000	8,000,000	10,000,000	13,000,000	59
1-1/2x6-1/2	6.50	63,250	680-100,000	10,400,000	13,000,000	17,000,000	59
A 2x2	2.00	32,000	560-170,000	9,600,000	12,000,000	15,600,000	64
A 2x4	4.00	80,000	510-160,000	12,000,000	15,000,000	19,500,000	64
A 2x6	6.00	120,000	570-190,000	14,400,000	18,000,000	23,500,000	64
A 2x8	8.00	170,000	580-200,000	16,800,000	21,000,000	27,000,000	64
A 2x10	10.00	210,000	720-250,000	19,200,000	24,000,000	31,000,000	64
A 3x5	5.00	140,000	1,050-340,000	20,000,000	25,000,000	32,500,000	64
A 3x8	8.00	250,000	1,200-400,000	32,000,000	40,000,000	52,000,000	64
A 3x12	12.00	390,000	1,350-450,000	48,000,000	60,000,000	78,000,000	64

20

Low Velocity Adjustable Models

Model Number	Stroke inches 1 inch = 25.4 mm	E3 Max Energy per Cycle, inch lbs 1 in lb = .11 Nm	We Effective Weight lbs, 1 lb = .45 kg	E4 Max Energy per hour, in lbs/hour 1 in lb/hour = .11 Nm/hour			Product Catalog Page
				Self-Contained	A/O Tank	A/O Re-circulating	
ML 3325	0.91	1,500	.05-1.5	670,000	1,100,000	1,500,000	49
ML 3350	1.91	3,000	.05-1.5	760,000	1,200,000	1,600,000	49
ML 3625	0.91	1,500	.05-1.5	670,000	1,100,000	1,500,000	49
ML 3650	1.91	3,000	.05-1.5	760,000	1,200,000	1,600,000	49
ML 4525	0.91	3,450	.05-1.5	950,000	1,400,000	1,700,000	51
ML 4550	1.91	6,900	.05-1.5	1,000,000	1,700,000	2,200,000	51
ML 6425	0.91	9,000	.05-1.5	1,100,000	2,200,000	2,900,000	53
ML 6450	1.91	18,000	.05-1.5	1,300,000	2,600,000	3,400,000	53

Magnum Group Emergency Shock Absorber Ratings

What if your system fails, a runaway occurs or the limit switch malfunctions? Magnum Group shock absorbers can handle up to 5 times the maximum energy for a single cycle or up to 3 times the maximum energy for 1,000 application cycles.

MC/MA 33 Series

MC Self-Compensating Ratings			Hydro Shock Ratings		Main Catalog Maximum Energy Ratings
Model	1 CYCLE E3 Energy per Cycle in lbs (Nm)	1,000 CYCLES E3 Energy per Cycle in lbs (Nm)	1 CYCLE E3 Energy per Cycle in lbs (Nm)	1,000 CYCLES E3 Energy per Cycle in lbs (Nm)	E3 Energy per Cycle in lbs (Nm)
MC 3325-1			6,750 (765)	4,050 (459)	1,350 (153)
MC 3325-2	4,050 (459)	2,700 (306)	9,000* lbs (40,034 N)	5,800* lbs (25,800 N)	
MC 3325-3					
MC 3325-4					
MC 3350-1			13,500 (1,525)	8,100 (915)	2,700 (305)
MC 3350-2	8,100 (915)	5,400 (610)	10,500* lbs (46,706 N)	6,500* lbs (28,913 N)	
MC 3350-3					
MC 3350-4					
MA Adjustable Ratings			Hydro Shock Ratings		
MA 3325	4,500 (507)	3,000 (338)	N/A	N/A	1,500 (169)
MA 3350	9,000 (1,017)	6,000 (678)	N/A	N/A	3,000 (339)

MC/MA 45 Series

MC Self-Compensating Ratings			Hydro Shock Ratings		Main Catalog Maximum Energy Ratings
Model	1 CYCLE E3 Energy per Cycle in lbs (Nm)	1,000 CYCLES E3 Energy per Cycle in lbs (Nm)	1 CYCLE E3 Energy per Cycle in lbs (Nm)	1,000 CYCLES E3 Energy per Cycle in lbs (Nm)	E3 Energy per Cycle in lbs (Nm)
MC 4525-1			15,000 (1,695)	9,000 (1,017)	3,000 (339)
MC 4525-2	9,000 (1,017)	6,000 (678)	24,000* lbs (106,757 N)	13,000* lbs (57,827 N)	
MC 4525-3					
MC 4525-4					
MC 4550-1			24,000 (2,712)	18,000 (2,034)	6,000 (678)
MC 4550-2	18,000 (2,034)	12,000 (1,356)	24,000* lbs (106,757 N)	13,000* lbs (57,827 N)	
MC 4550-3					
MC 4550-4					
MC 4575-1			36,000 (4,067)	27,000 (3,050)	9,000 (1,017)
MC 4575-2	27,000 (3,051)	18,000 (2,034)	24,000* lbs (106,757 N)	13,000* lbs (57,827 N)	
MC 4575-3					
MC 4575-4					
MA Adjustable Ratings			Hydro Shock Ratings		
MA 4525	10,350 (1,170)	6,900 (708)	N/A	N/A	3,450 (390)
MA 4550	20,700 (2,340)	13,800 (1,560)	N/A	N/A	6,900 (780)
MA 4575	31,050 (3,507)	20,700 (2,338)	N/A	N/A	10,350 (1,169)

*Maximum allowable reaction force.

Self-Compensating

ACE Miniature Shock Absorbers


are self-contained hydraulic units. The MC 9 to MC 75 model range has a very short overall length and low return force. Its small size allows for high energy absorption in confined spaces, while the wide effective weight ranges accommodate a variety of load conditions. With threaded outer bodies and multiple accessories, MC models can be mounted in numerous configurations.

Applications include: small linear slides, material handling and packaging equipment, small robotics, office and medical equipment, as well as instrumentation.



Miniature Shock Absorbers MC 9 to MC 75

Self-Compensating

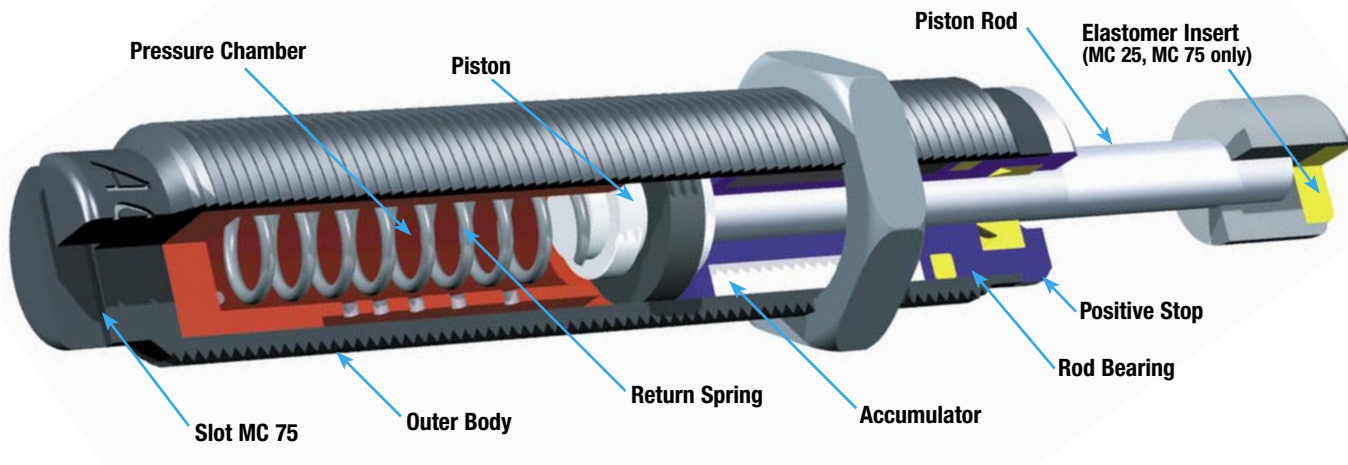


Ordering Information

MC 75 -1

MC Series	Model Number	Mounting Thread	Effective Weight	Button Options
	9	MC 9M	MC 9M	MC 9M & 10
	10	M M6 x 0.5 Metric	1 Light	Standard No Button
	25		2 Medium	-B Delrin Button
	30	MC 10	MC 10	MC 25 & 75
	75	M M8 x 1 Metric	L Light Range	Standard with Button
		E M8 x 0.75 Metric	H Heavy Range	-NB *No Button, Short Rod
				-880 No Button, Standard Rod
				-BP Steel Button/Urethane Cap Assembly
		MC 25	MC 25	MC 30 & MC 30M-Z
		Standard (UNEF)	L Light Range	Standard with Steel Button
		M M10 x 1 Metric	Standard Range	-NB No Button, Short Rod
			H Heavy Range	-BP Steel Button/Urethane Cap Assembly (MC 30 Only)
		MC 30M & MC 30M-Z	MC 30 & MC 30M-Z	
		M M8 x 1 Metric	1 Light	
			2 Medium	
			3 Heavy	
		MC 75	MC 75	
		- Standard (UNF)	-1 Light	
		M M12 x 1 Metric	-2 Medium	
			-3 Heavy	

*Consult factory for dimensional options

Self-Compensating

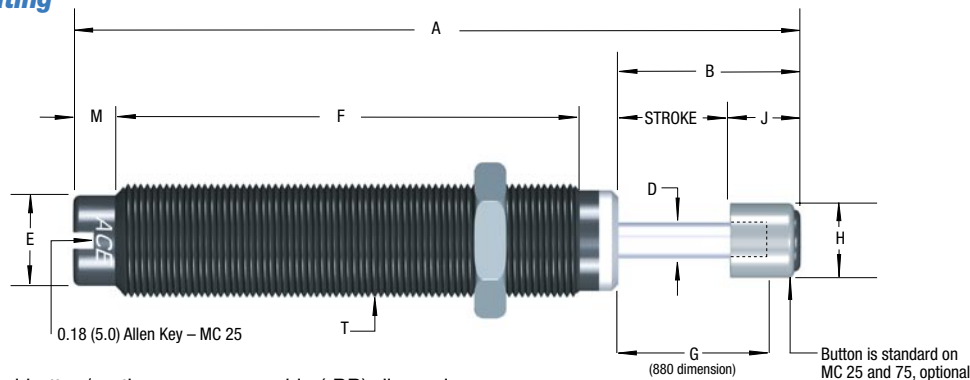

See page 43 for steel button/urethane cap assembly (-BP) dimensions.
For overall length of MC 9 and MC 10 without buttons, deduct the J dimension from the A dimension.

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	F	G	H	J	M	T
MC 9M	.20 (5.0)	1.42 (36.0)	.40 (10.0)	N/A	.08 (2.0)	.20 (5.0)	.83 (21.1)	N/A	.19 (4.7)	.20 (5.0)	.10 (2.5)	M6x0.5
MC 10E MC 10M	.20 (5.0)	1.52 (38.6)	.40 (10.0)	N/A	.08 (2.0)	.25 (6.4)	.83 (21.1)	N/A	.19 (4.7)	.20 (5.0)	.19 (4.8)	M8x0.75 M8x1
MC 25 MC 25M	.26 (6.6)	2.27 (57.7)	.57 (14.5)	N/A	.13 (3.3)	.33 (8.4)	1.3 (33.0)	.45 (11.4)	.30 (7.6)	.32 (8.1)	.20 (5.0)	3/8-32 UNEF M10x1
MC 30M	.32 (8.1)	2.13 (54.0)	.52 (13.2)	N/A	.10 (2.5)	.25 (6.5)	1.35 (34.3)	N/A	.25 (6.5)	.20 (5.0)	.16 (4.1)	M8x1
MC 30M-Z	.32 (8.1)	2.96 (75.1)	.52 (13.2)	N/A	.10 (2.5)	.25 (6.5)	2.18 (55.4)	N/A	.25 (6.5)	.20 (5.0)	.16 (4.1)	M8x1
MC 75 MC 75M	.40 (10.2)	2.76 (70.1)	.72 (18.1)	N/A	.13 (3.3)	.41 (10.4)	1.74 (44.2)	.60 (15.2)	.30 (7.6)	.32 (8.1)	.18 (4.6)	1/2-20 UNF M12x1

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
MC 9M1	1.35 - 7.0 (0.6 - 3.2)	9.0 (1.0)	18,000 (2,000)	0.31 - 0.85 (1.38 - 3.78)	0.30	0.01 (0.004)
MC 9M2	1.75 - 9.0 (0.8 - 4.1)					
MC 10L	0.75 - 6.0 (0.34 - 3)	4.0 (0.45)	35,000 (3,950)	0.5 - 1.0 (2.22 - 4.45)	0.20	0.02 (0.01)
MC 10H	1.5 - 11 (0.68 - 5)	7.0 (0.79)				
MC 25L	1.5 - 5.0 (0.68 - 2)		200,000 (22,500)	0.8 - 1.7 (3.56 - 7.56)	0.20	0.06 (0.03)
MC 25	4 - 12 (2 - 5)	20 (2)				
MC 25H	10 - 30 (5 - 14)					
MC 30M1	1.0 - 4.3 (0.45 - 1.95)	31 (3.5)	50,000 (5,650)	1.16 - 1.57 (5.1 - 7.0)	0.30	0.02 (0.01)
MC 30M2	3.97 - 11.9 (1.8 - 5.4)					
MC 30M3	11.02-33.0 (5.0-15.0)					
MC 30M1-Z	1.0 - 4.3 (0.45 - 1.95)	31 (3.5)	50,000 (5,650)	0.57 - 1.56 (2.53 - 6.93)	0.30	0.03 (0.011)
MC 30M2-Z	3.97 - 11.9 (1.8 - 5.4)					
MC 30M3-Z	11.02 - 33.7 (0 - 15)					
MC 75-1	.5 - 2.5 (0.23 - 1)	75 (8)	250,000 (28,240)	1.0 - 2.5 (4.45 - 11.12)	0.30	0.1 (0.04)
MC 75-2	2 - 14 (0.91 - 6)					
MC 75-3	6 - 80 (3 - 36)					

Technical Data

Impact velocity range:

MC 9M: 0.5 to 6 ft/sec (0.15 to 1.8 m/sec)
MC 10: 0.5 to 5 ft/sec (0.15 to 1.5 m/sec)
MC 25: 0.5 to 8 ft/sec (0.15 to 2.4 m/sec)
MC 30M & MC 30M-Z: 2.2 to 12.9 ft/sec (0.67 to 3.93 m/sec)
MC 75: 0.5 to 12 ft/sec (0.15 to 3.66 m/sec)

Operating temperature:

MC 9M and MC 10: 14° to 150°F (-10° to 66°C)
MC 25, 30M, 30M-Z & 75: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into front of units.

Oil type: Silicone

Oil type MC 30M & MC 30M-Z: ACE oil #5

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

Note: All dimensions and tolerance values listed in this catalog are nominal and subject to change without notice.


Self-Compensating

ACE MC 150, 225 and 600 miniature series shock absorbers feature **significant increases in energy per cycle (E3)** over previous models. **Select MC miniature models now have the energy capability of former middle bore models.** This reliable series also features a rolling diaphragm seal system that offers the longest possible cycle life.

The versatile MC 150, 225 and 600 series offers **three effective weight ranges** and is capable of handling numerous applications. These models are ideal for mounting into the end covers of pneumatic cylinders and provide superior damping compared to normal cylinder cushions,

Applications for this durable MC Series include: material handling equipment, medium robotics, machine tools, pick and place systems and packaging equipment.

Emergency application ratings: MC 150, 225 and 600 Series shock absorbers are capable of handling **4 times the maximum energy** per cycle for a single cycle and **2 times the maximum energy** per cycle for 1,000 cycles.

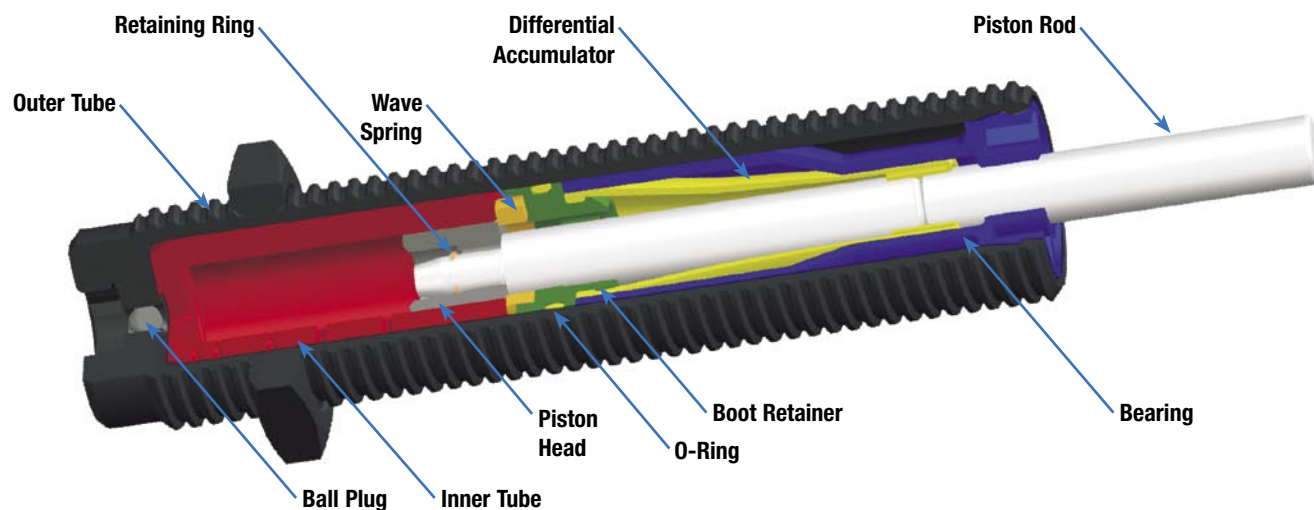Miniature Shock Absorbers **MC 150, MC 225 and MC 600****Self-Compensating****Ordering Information****MC 225 -**

MC Series	Model Number	Mounting Thread	Effective Weight	Button Options
	150	- Standard (UNF)	Standard Range	Standard No Button
	225	M Metric	H Heavy Range	-B Nylon Glass/Fiber Button
	600	ME* Fine Metric	H2 Extra Heavy Range	-BS Steel Button
		ML** Coarse Metric		-BP Steel Button/Urethane Cap Assembly
		* MC 150 only		
		** MC 600 only		


Button Option:

The ACE **steel button/urethane cap assembly (-BP)** is available if more quiet equipment operation is desired.

Nylon/Glass Fiber Button Energy Ratings Chart:

Model	Maximum Energy per Cycle - inch lbs. (Nm)	Percent of Rated Energy per Cycle
MC 150	123 (14)	70%
MC 225	288 (33)	80%
MC 600	600 (68)	50%

Self-Compensating

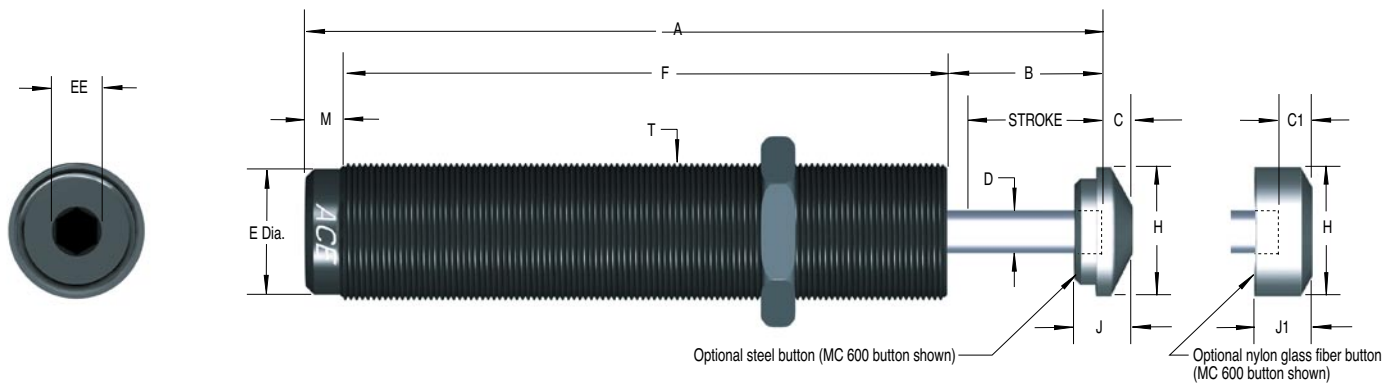

See page 47 for steel button/urethane cap assembly (-BP) dimensions.

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	C1	D	E	F	H	J	J1	M	T	EE
MC 150	.50	3.41	.69	.25	.18	.19	.46	2.44	.47	.43	.37	.28	9/16-18 UNF	.25
MC 150M	(12.7)	(86.6)	(17.4)	(6.3)	(4.7)	(4.8)	(11.6)	(62.0)	(11.9)	(10.9)	(9.4)	(7.1)	M14x1.5	(6.4)
MC 150ME													M14x1	
MC 225	.50	3.81	.69	.26	.19	.25	.66	2.84	.66	.43	.34	.28	3/4-16 UNF	.32
MC 225M	(12.7)	(96.8)	(17.6)	(6.6)	(4.9)	(6.3)	(16.7)	(72.1)	(16.7)	(10.9)	(8.8)	(7.1)	M20x1.5	(8.0)
MC 600	1.00	5.58	1.24	.18	.20	.31	.89	4.06	.90	.39	.42	.28	1-12 UNF	.38
MC 600M	(25.4)	(141.8)	(30.9)	(4.6)	(5.2)	(7.9)	(22.7)	(103.1)	(23.0)	(9.9)	(10.5)	(7.1)	M25x1.5	(9.6)
MC 600ML													M27x3	

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
MC 150	2 - 22 (0.91 - 10)	175 (20)	300,000 (33,890)	0.70 - 1.20 (3.11 - 5.34)	0.40	.12 (0.05)
MC 150H	20 - 200 (9 - 91)	350* (39)				
MC 150H2	150 - 450 (68 - 204)					
MC 225	5 - 55 (2 - 25)	360 (41)	400,000 (45,190)	1.00 - 1.50 (4.45 - 6.67)	0.30	.34 (0.15)
MC 225H	50 - 500 (23 - 227)	700* (79)				
MC 225H2	400 - 2,000 (181 - 907)					
MC 600	20 - 300 (9 - 136)	1,200 (135)	600,000 (67,790)	1.00 - 2.00 (4.45 - 8.90)	0.60	.57 (0.26)
MC 600H	250 - 2,500 (113 - 1,134)	2,200* (248)				
MC 600H2	880 - 5,000 (399 - 2,268)					

* Hydro shock energy ratings. Consult factory.

Technical Data

Impact velocity range: 0.26 to 19.7 ft/sec (0.08 to 6 m/sec)

Operating temperature: 32° to 150°F (0° to 66°C)

Positive stop: at end of stroke

Oil type: Silicone

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Rolling seal is EPDM and not compatible with petroleum based fluids. If shock absorber is to be used in contact with such fluids, specify neoprene rolling seal.

Consider the SC2 Series as an alternative.

Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.


MC 150, 225 and 600 models are ideal for mounting into pressure chambers of pneumatic actuators.

Soft Contact and Self-Compensating

ACE SC² Series Miniature Shock Absorbers provide dual performance benefits. They offer **soft contact deceleration** where initial impact reaction forces are very low, with the advantages of **self-compensation** to react to changing energy conditions, without adjustment. They have long stroke lengths, **SC² 925 with 1.58 inch (40 mm) superstroke**, to provide smooth deceleration and low reaction forces.

With the addition of the **optional side load adapter** (SC² 190M, 300M, and 650M models only), SC² Series shock absorbers can handle side loads up to 25°. SC² Series shock absorbers are fully interchangeable with the adjustable MA range.

Applications include: material handling, medium robotics, machine tools, pick and place systems, rodless cylinders and packaging equipment.

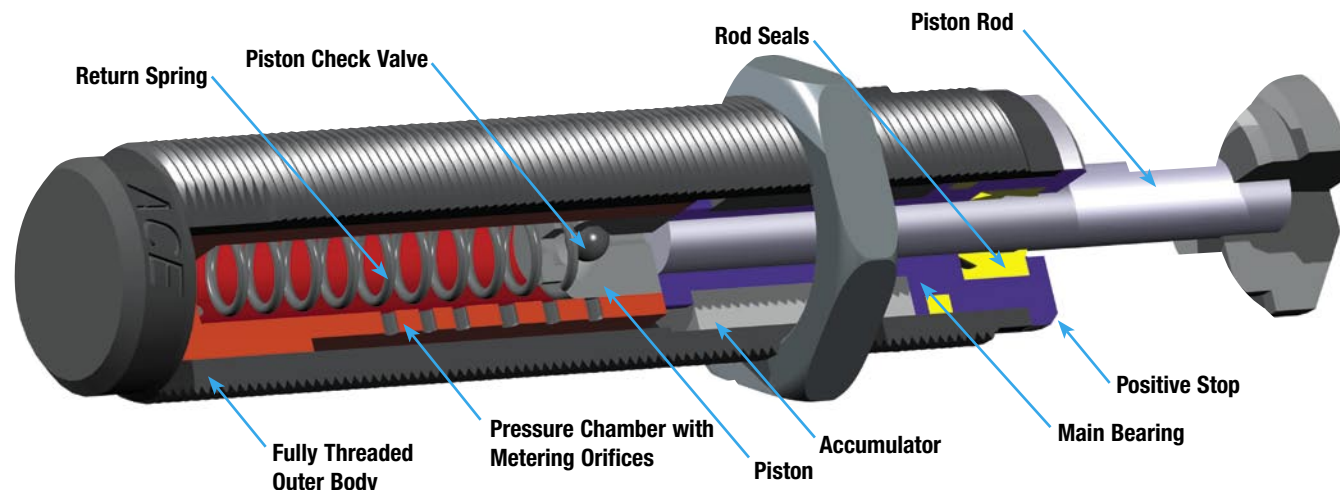
Miniature Shock Absorbers **SC² 190 to SC² 925****Soft Contact and Self-Compensating****Ordering Information****SC 300 - 1**

SC ² Series	Model Number	Mounting Thread	Effective Weight	Button Options
Soft Contact Self-Compensating	190 300 650 925	- Standard (UNF) M Metric	-1 Ultra Light -2 Light -3 Medium -4 Heavy	- Standard with Button -NB No Button, Short Rod -880 No Button, Standard Rod -BP Steel Button/Urethane Cap Assembly

Button Option:

The ACE **steel button/urethane cap assembly (-BP)** is available if more quiet equipment operation is desired.

Soft Contact and Self-Compensating

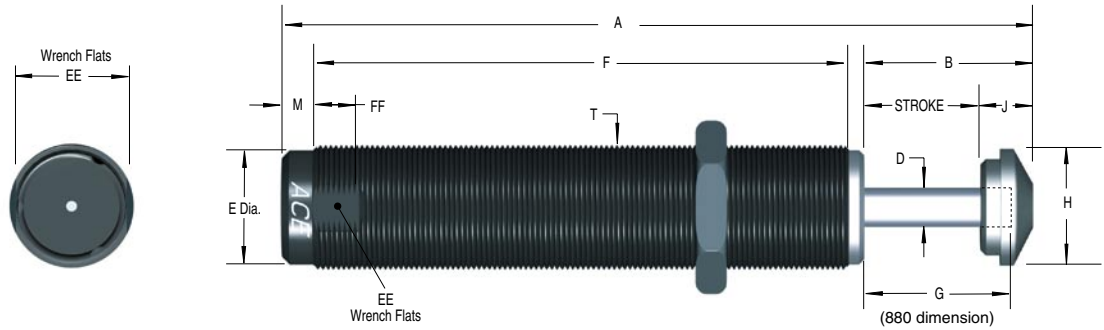

See page 43 for steel button/urethane cap assembly (-BP) dimensions.

Dimensions in inches (millimeters)

Model	Stroke	A	B	D	E	F	G	H	J	M	T	EE	FF
SC 190	.63	4.50	1.06	.16	.46	3.00	.88	.47	.43	.28	9/16-18 UNF	1/2	.50
SC 190M	(16.0)	(114.3)	(26.9)	(4.1)	(11.7)	(76.2)	(22.4)	(11.9)	(11.0)	(7.1)	M14x1.5	(12.0)	(12.7)
SC 300	.75	4.62	1.18	.19	.66	3.09	1.00	.66	.43	.28	3/4-16 UNF	11/16	.50
SC 300M	(19.1)	(117.5)	(30.0)	(4.8)	(16.8)	(78.5)	(25.4)	(16.8)	(11.0)	(7.1)	M20x1.5	(18.0)	(12.7)
SC 650	1.00	5.62	1.43	.25	.87	3.83	1.25	.90	.43	.28	1-12 UNF	7/8	.50
SC 650M	(25.4)	(142.6)	(36.3)	(6.3)	(22.1)	(97.3)	(31.8)	(22.9)	(11.0)	(7.1)	M25x1.5	(23.0)	(12.7)
SC 925	1.58	7.44	2.01	.25	.87	5.1	1.82	.90	.43	.28	1-12 UNF	7/8	.50
SC 925M	(40.0)	(189.1)	(51.1)	(6.3)	(22.1)	(129.5)	(46.4)	(22.9)	(11.0)	(7.1)	M25x1.5	(23.0)	(12.7)

27

Specifications

Model	Soft Contact We	Self-Compensating We	E ₃	E ₄	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
	Effective Weight lbs (kg)	Effective Weight lbs (kg)	Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour)			
SC 190-1	5 - 13 (2 - 6)	3 - 15 (1.4 - 7)					
SC 190-2	12 - 36 (5 - 16)	8 - 40 (4 - 18)	225 (25)	300,000	0.90 - 1.90	0.25	0.18
SC 190-3	30 - 90 (14 - 41)	20 - 100 (9 - 45)	*300 (33)	(34,000)	(4.00 - 8.95)		(0.08)
SC 190-4	75 - 200 (34 - 91)	50 - 225 (23 - 102)					
SC 300-1	5 - 15 (2 - 7)	3 - 18 (1.4 - 8)					
SC 300-2	15 - 50 (7 - 23)	10 - 60 (5 - 27)	300 (33)	400,000	1.05 - 2.15	0.10	0.25
SC 300-3	50 - 150 (23 - 68)	30 - 180 (14 - 82)	*500 (56)	(45,000)	(4.67 - 9.56)		(0.11)
SC 300-4	150 - 400 (68 - 181)	70 - 450 (32 - 204)					
SC 650-1	24 - 80 (11 - 36)	17 - 100 (8 - 45)					
SC 650-2	75 - 250 (34 - 113)	50 - 300 (23 - 136)	650 (73)	600,000	2.40 - 6.87	0.20	0.67
SC 650-3	240 - 800 (109 - 363)	150 - 900 (68 - 408)	*1,000 (113)	(68,000)	(10.67 - 30.55)		(0.31)
SC 650-4	800 - 2400 (363 - 1089)	450 - 2600 (204 - 1180)					
SC 925-1	50 - 160 (22 - 72)	30 - 200 (14 - 90)					
SC 925-2	130 - 460 (59 - 208)	90 - 600 (40 - 272)	975 (110)	800,000	2.40 - 7.40	0.40	0.87
SC 925-3	400 - 1,350 (181 - 612)	250 - 1,600 (113 - 726)	*1,700 (192)	(90,000)	(10.67 - 30.55)		(0.39)
SC 925-4	1200 - 4300 (544 - 1952)	750 - 4600 (340 - 2088)					

* Hydro shock energy ratings. Consult factory.

Technical Data

Impact velocity range: 0.5 to 12 ft/sec (0.15 to 3.66 m/sec)

Operating temperature: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into front of units.

Oil type: ACE #5

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod. Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

Self-Compensating



ACE Controls new ultra-high energy SC 25, SC 75 and SC 190 Heavyweight models are the newest additions to the award winning SC² 300 and SC² 650 Heavyweight Series, delivering up to 950% of effective weight capacity and 280% of the energy absorption capacity of previous models.

These versatile miniatures **combine the piston and inner tube into a single component, the piston tube**. It serves as both the pressure creating and pressure controlling device.

SC 190 models include a **hermetically sealed rolling diaphragm seal** system that provides for long cycle life. Durable SC 25 and SC 75 models include a stretch seal design.


SC 25, SC 75 and SC 190 shock absorbers are ideal for **mounting into pressure chambers of pneumatic cylinders** and provide superior damping compared to normal cylinder cushions.

Wide effective weight ranges are available for a multitude of applications.

Applications include: new higher propelling force pneumatic actuators, rotary actuators and new rail slides.

28 Heavyweight Shock Absorbers SC 190 Shown

Self-Compensating

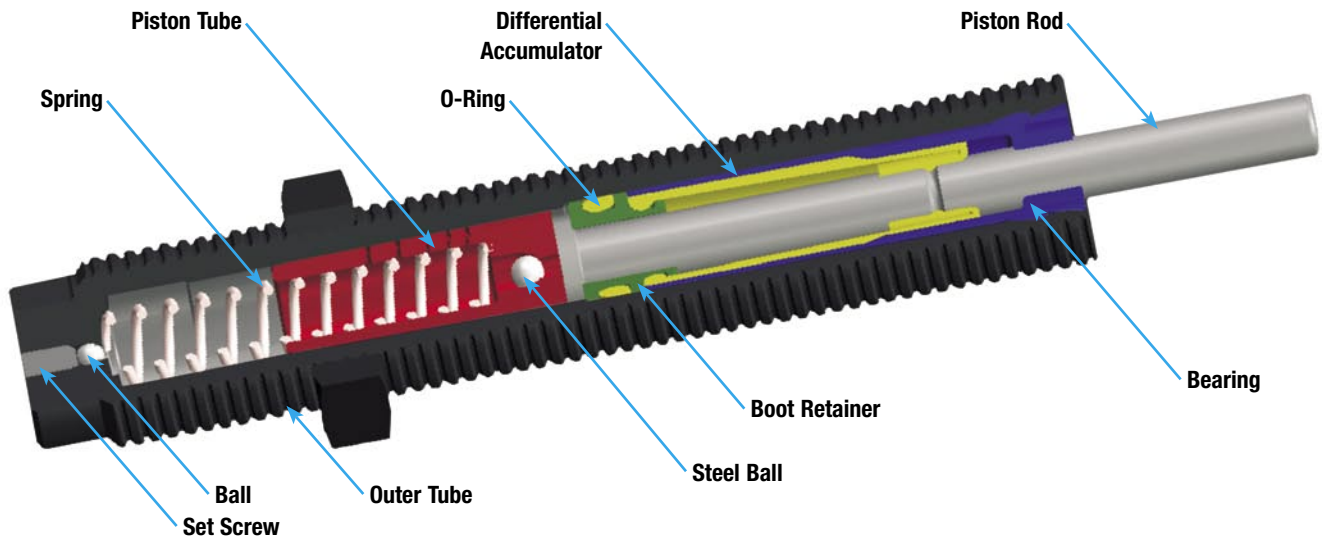

Ordering Information


SC 25 M 5				
SC Series	Model Number	Mounting Thread	Effective Weight	Button Options
Self-Compensating	25	SC 25M	5 Heavy	Standard No Button
	75	M M10 x 1 Metric	6 Heavy Plus	-BP Steel Button/Urethane
	190	SC 75	7 Heavy Duty	Cap Assembly
		M M12 x 1 Metric		(SC 190 only)
		SC 190		
		M M14 x 1.5 Metric		

Button Option:

The ACE **steel button/urethane cap assembly (-BP)** is available if more quiet equipment operation is desired (SC 190 only).



Self-Compensating

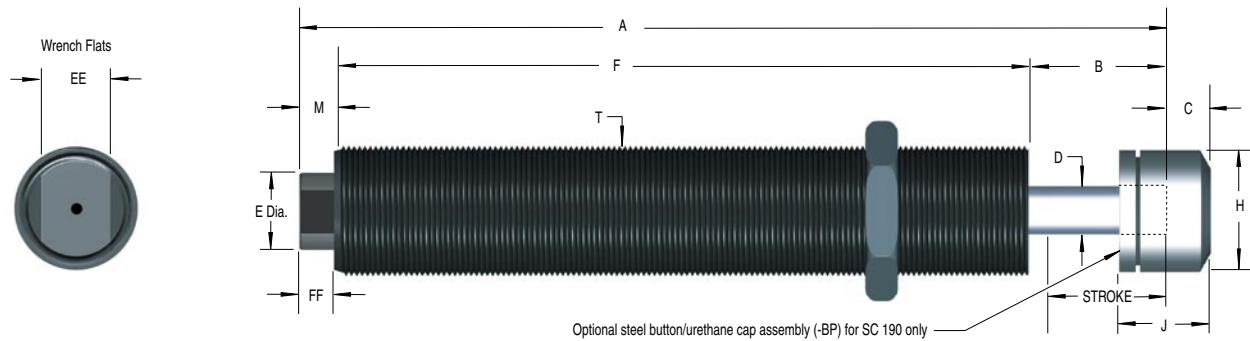

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	F	H	J	M	T	EE	FF
SC 25M	.32 (8.0)	3.27 (83.0)	.43 (11.0)	N/A	.12 (3.1)	.34 (8.6)	2.64 (67.0)	N/A	N/A	.20 (5.0)	M10 x 1	.27 (6.9)	.18 (4.6)
SC 75M	.39 (10.0)	3.62 (92.0)	.55 (14.1)	N/A	.16 (4.0)	.40 (10.2)	2.82 (71.5)	N/A	N/A	.23 (5.9)	M12 x 1	.31 (7.9)	.18 (4.6)
SC 190M	.47 (12.0)	3.70 (94.0)	.67 (17.0)	.30 (7.6)	.19 (4.8)	.47 (12.0)	2.83 (72.0)	.48 (12.1)	.48 (12.1)	.20 (5.0)	M14 x 1.5	.39 (9.8)	.18 (4.6)

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
SC 25M5	2.2 - 11 (1 - 5)					
SC 25M6	9 - 97 (4 - 44)	89 (10)	142,000 (16,000)	.90 - 3.07 (4.0 - 13.7)	0.30	.06 (0.03)
SC 25M7	93 - 1,100 (42 - 500)					
SC 75M5	2.2 - 18 (1 - 8)					
SC 75M6	15 - 172 (7 - 78)	142 (16)	266,000 (30,000)	.69 - 3.40 (3.1 - 15.1)	0.40	.10 (0.04)
SC 75M7	165 - 1,760 (75 - 800)					
SC 190M5	4.4 - 35.2 (2 - 16)				0.40	
SC 190M6	29 - 309 (13 - 140)	274 (31)	443,000 (50,000)	.97 - 5.57 (4.3 - 24.8)	0.40	.13 (0.06)
SC 190M7	300 - 3,400 (136 - 1,550)				0.50	

Technical Data

Impact velocity range:

SC 25M5: 2.9 to 14.7 ft/sec (0.88 to 4.5 m/sec)
 SC 25M6: 0.99 to 7.3 ft/sec (0.30 to 2.2 m/sec)
 SC 25M7: 0.29 to 2.3 ft/sec (0.09 to 0.70 m/sec)

SC 75M5: 2.9 to 18.6 ft/sec (0.88 to 5.7 m/sec)
 SC 75M6: 0.94 to 7.1 ft/sec (0.29 to 2.2 m/sec)
 SC 75M7: 0.29 to 2.1 ft/sec (0.09 to 0.66 m/sec)

SC 190M5: 2.9 to 18.3 ft/sec (0.88 to 5.6 m/sec)
 SC 190M6: 0.98 to 7.1 ft/sec (0.30 to 2.2 m/sec)
 SC 190M7: 0.29 to 2.2 ft/sec (0.09 to 0.67 m/sec)

Operating temperature: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into shock absorber.

Oil type: SF-500

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

SC 190 models: rolling seal EPDM and not compatible with petroleum based fluids. If shock absorber is to be used in contact with such fluids, specify neoprene rolling seal.

SC 25 and SC 75 models: stretch seal is nitrile and is compatible with petroleum based fluids.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

SC 25, 75 and 190 models are ideal for mounting into pressure chambers of pneumatic actuators.

SC² Heavyweight Series...
Named One of Best Products of the
Year in Fluid Power by Design News.



Soft Contact and Self-Compensating

ACE's award winning SC² 300 and SC² 650 Heavyweight Series Shock Absorbers deliver up to 950% of the effective weight capacity and 280% of the energy absorption capability of standard models. These durable units are ideal for decelerating heavy weights moving at low velocities. The Heavyweight Series design combines the piston and the inner tube into a single component, the piston tube. It acts as both the pressure creating and pressure controlling device.

ACE's SC² 300 and SC² 650 Heavyweight Series Shock Absorbers offer expanded effective weight ranges and dramatic increases in energy absorption capability, for handling a wider range of applications.


These revolutionary shock absorbers provide dual performance benefits. They offer **soft contact** deceleration where initial impact reaction forces are very low with the advantages of **self-compensation** to cope with changing input energy conditions without adjustment.

Applications include: rotary actuators, rodless cylinders, conveyors, pick and place operations, slides as well as operations turning heavy weights at slow speeds.

30

Heavyweight Shock Absorbers SC² 300 and SC² 650

Soft Contact and Self-Compensating

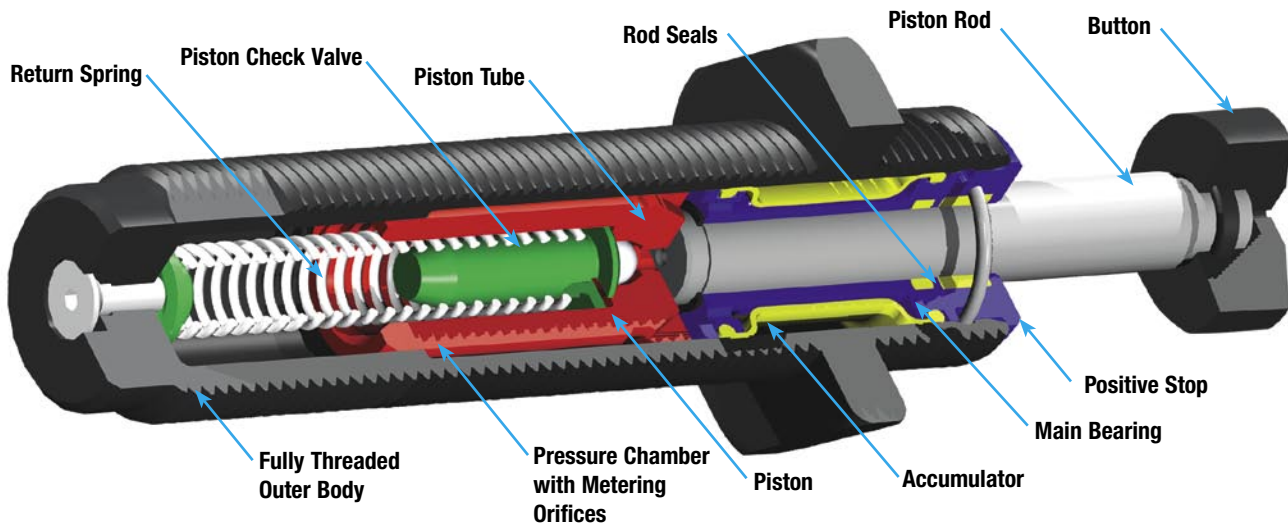


Ordering Information

SC 300 - 5

SC ² Series	Model Number	Mounting Thread	Effective Weight	Button Options
Soft Contact Self-Compensating	300 650	- Standard (UNF) M Metric	-5 Heavy -6 Heavy Plus -7 Heavy Duty -8 Extra Heavy -9 Ultra Heavy	- Standard with Button -NB No Button, Short Rod -880 No Button, Standard Rod

Soft Contact and Self-Compensating

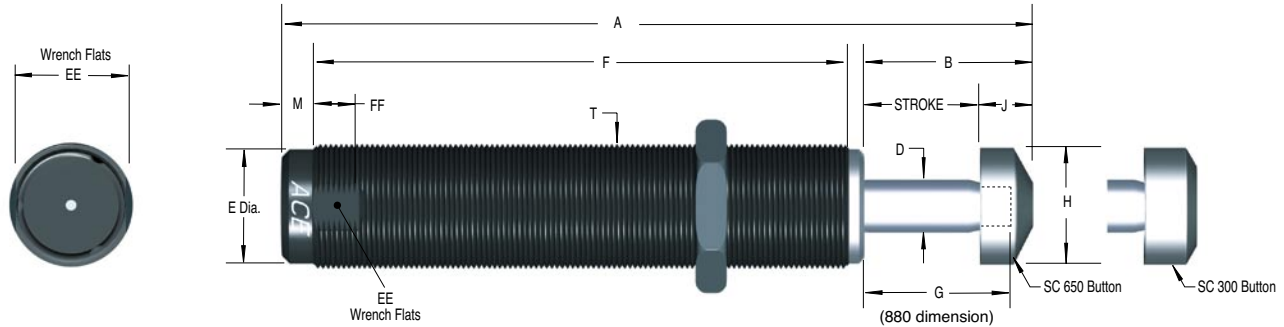

See page 43 for steel button/urethane cap assembly (-BP) dimensions.

Heavyweight Series Dimensions in inches (millimeters)

Model	Stroke	A	B	D	E	F	G	H	J	M	T	EE	FF
SC 300-5													
SC 300-6													
SC 300-7													
SC 300-8													
SC 300-9	.59	4.15	1.02	.25	.66	2.78	.84	.66	.42	.28	3/4-16 UNF	11/16	.50
SC 300M5	(15.0)	(105.4)	(25.9)	(6.4)	(16.8)	(70.6)	(21.3)	(16.8)	(10.7)	(7.1)	M20x1.5	(17.4)	(12.7)
SC 300M6													
SC 300M7													
SC 300M8													
SC 300M9													
SC 650-5													
SC 650-6													
SC 650-7													
SC 650-8													
SC 650-9	.91	5.51	1.33	.38	.86	3.80	1.16	.90	.43	.28	1-12 UNF	7/8	.50
SC 650M5	(23.1)	(140.0)	(33.8)	(9.6)	(22.0)	(96.6)	(29.5)	(22.9)	(10.9)	(7.1)	M25x1.5	(22.2)	(12.7)
SC 650M6													
SC 650M7													
SC 650M8													
SC 650M9													

Specifications

Model	Soft Contact We	Self-Compensating We	E ₃	E ₄	Return Force	Return Time	Shipping Weight
	Effective Weight lbs (kg)	Effective Weight lbs (kg)	Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour)	lbs (N)	sec	lbs (kg)
SC 300-5	38 - 90 (17 - 41)	25 - 100 (11 - 45)					
SC 300-6	115 - 270 (52 - 123)	75 - 300 (34 - 136)	650	400,000	1.70 - 4.00	0.20	0.33
SC 300-7	300 - 360 (136 - 163)	200 - 400 (91 - 181)	(73)	(45,194)	(7.56 - 17.79)		(0.15)
SC 300-8	450 - 1,350 (204 - 612)	300 - 1,500 (136 - 680)	620	400,000	1.70 - 4.00	0.20	0.33
SC 300-9	1,050 - 3,900 (476 - 1,769)	700 - 4,300 (318 - 1,950)	(70)	(45,194)	(7.56 - 17.79)		(0.15)
SC 650-5	75 - 225 (34 - 102)	50 - 250 (23 - 113)					
SC 650-6	300 - 720 (136 - 327)	200 - 800 (91 - 363)	1,860	600,000	2.40 - 7.30	0.25	0.76
SC 650-7	1,050 - 2,150 (476 - 975)	700 - 2,400 (317 - 1,089)	(210)	(67,791)	(10.68 - 32.99)		(0.34)
SC 650-8	2,500 - 5,200 (1,134 - 2,359)	1,700 - 5,800 (771 - 2,631)	1,860	600,000	2.40 - 7.30	0.30	0.76
SC 650-9	6,000 - 12,500 (2,722 - 5,670)	4,000 - 14,000 (1,814 - 6,350)	(210)	(67,791)	(10.68 - 32.47)		(0.34)

Technical Data

Impact velocity range: .30 to 12.0 ft/sec (0.09 to 3.66 m/sec)

Operating temperature: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into front of units.

Oil type: ACE #5

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

Self-Compensating


ACE Controls SC 25, 75 & 190-HC High-Cycle shock absorbers are engineered for high-speed equipment applications. These rugged performers are ideal for the packaging industry. They offer a short stroke, quick time through stroke and quick rod-ready time. In addition, these dependable self-compensating miniatures are capable of rapid repeat strokes. The result is faster cycling for your equipment and gains in production time for you.

Applications include: packaging equipment, slides, rotary actuators, small and medium robotics, machine tools, pick & place operations and more.



32 High-Cycle Shock Absorbers (SC 190 Shown)

Self-Compensating

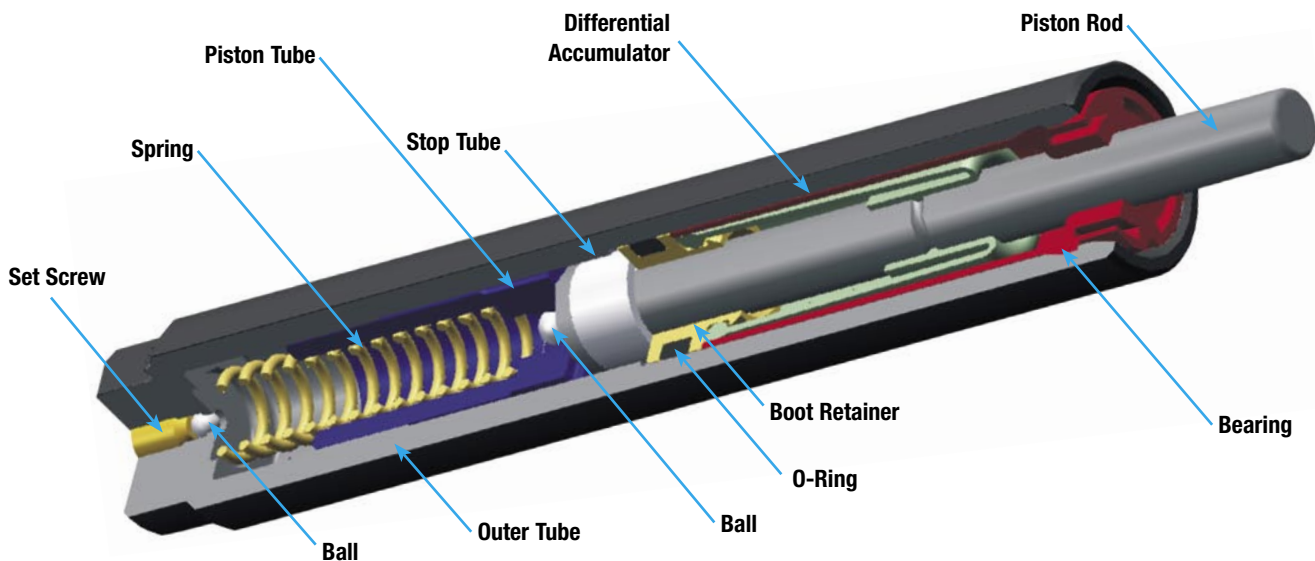


Ordering Information

SC 190 M 5 - HC

SC Series	Model Number	Mounting Thread	Effective Weight	High-Cycle	Button
Self-Compensating	25	SC 25M	5 Heavy		Standard No Button
	75	M M10 x 1 Metric	6 Heavy Plus		
	190	SC 75M	7 Heavy Duty		
		M M12 x 1 Metric			
		SC 190M			
		M M14 x 1.5 Metric			

Self-Compensating

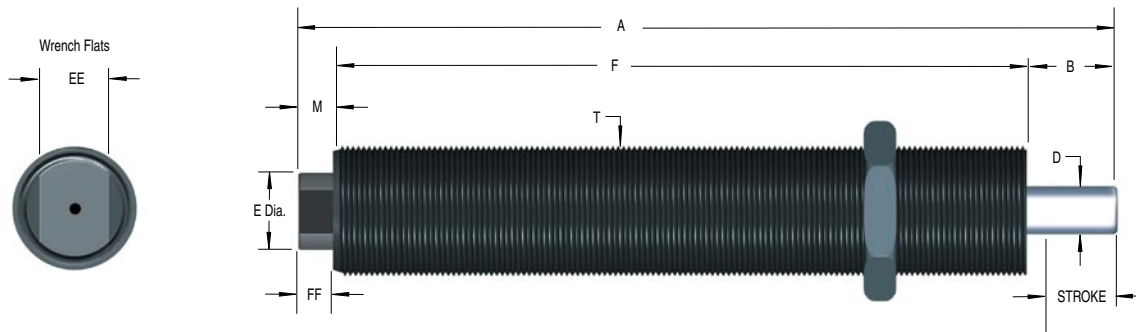

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	F	H	J	M	T	EE	FF
SC 25M	.16 (4.2)	3.11 (79.1)	.28 (7.1)	N/A	.12 (3.1)	.33 (8.4)	2.64 (67.0)	N/A	N/A	.20 (5.0)	M10 x 1	.27 (6.9)	.18 (4.5)
SC 75M	.20 (5.1)	3.43 (87.1)	.36 (9.1)	N/A	.16 (4.0)	.40 (10.2)	2.82 (71.5)	N/A	N/A	.23 (5.9)	M12 x 1	.31 (7.9)	.18 (4.5)
SC 190M	.30 (7.6)	3.53 (89.5)	.50 (12.6)	N/A	.19 (4.8)	.47 (11.9)	2.83 (72.0)	N/A	N/A	.20 (5.0)	M14 x 1.5	.39 (9.8)	.20 (5.1)

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
SC 25M5-HC	2.2 - 11 (1 - 5)	20 (2)	142,000 (14,200)	1.98 - 3.08 (8.8 - 13.7)	0.20	.06 (0.03)
SC 25M6-HC	9 - 97 (4 - 44)					
SC 25M7-HC	93 - 1,100 (42 - 499)					
SC 75M5-HC	2.2 - 18 (1 - 8)	75 (8)	226,000 (24,100)	1.94 - 3.4 (8.6 - 15.1)	0.30	.10 (0.04)
SC 75M6-HC	15 - 172 (7 - 78)					
SC 75M7-HC	165 - 1,760 (75 - 798)					
SC 190M5-HC	4 - 35 (2 - 16)	175 (20)	443,000 (50,600)	2.67 (11.88)	0.30	.13 (0.06)
SC 190M6-HC	29 - 309 (13 - 140)					
SC 190M7-HC	300 - 3,400 (136 - 1,542)					

Technical Data

Impact velocity range:

SC 25M5-HC: 0.98 to 6.98 ft/sec (0.30 to 2.12 m/sec)

SC 25M6-HC: 0.33 to 3.45 ft/sec (0.10 to 1.05 m/sec)

SC 25M7-HC: 0.09 to 1.07 ft/sec (0.03 to 0.32 m/sec)

SC 75M5-HC: 1.49 to 13.52 ft/sec (0.46 to 4.12 m/sec)

SC 75M6-HC: 0.48 to 5.18 ft/sec (0.15 to 1.58 m/sec)

SC 75M7-HC: 0.15 to 1.56 ft/sec (0.05 to 0.48 m/sec)

SC 190M5-HC: 1.63 to 14.60 ft/sec (0.49 to 4.45 m/sec)

SC 190M6-HC: 0.55 to 5.69 ft/sec (0.17 to 1.73 m/sec)

SC 190M7-HC: 0.16 to 1.76 ft/sec (0.05 to 0.54 m/sec)

Operating temperature: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into shock absorber.

Oil type: SF 96-500

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.


Self-Compensating

ACE Controls SC 300 & 650-HC High-Cycle shock absorbers were designed for high-speed equipment applications. Ideal for the packaging industry, these reliable self-compensating miniatures offer a short stroke, quick time through stroke and quick rod-ready time. In addition, they are capable of rapid repeat strokes. **This translates to faster cycling for your equipment and gains in production time for you.**

Applications include: packaging equipment, slides, rotary actuators, small and medium robotics, machine tools, pick & place operations and more.



34 High Cycle Shock Absorbers (SC 650-HC Shown)

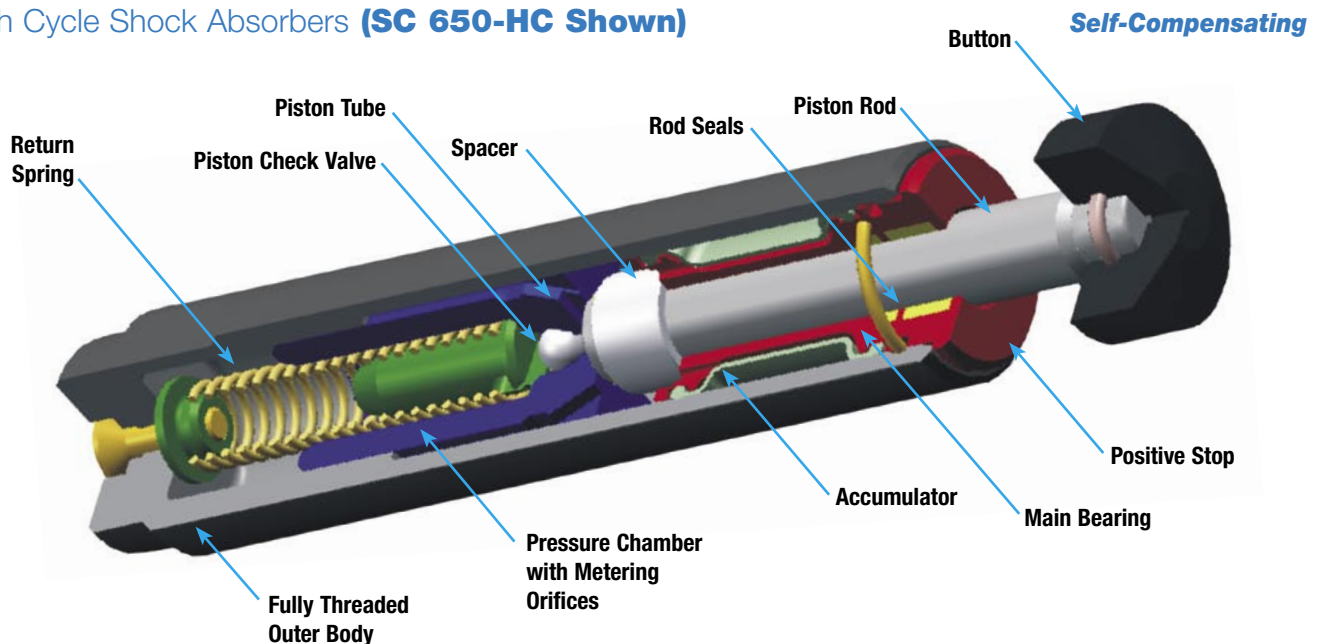


Ordering Information

SC 650 - 5 - HC

SC Series	Model Number	Mounting Thread	Effective Weight	High-Cycle	Button Options
Self-Compensating	300 650	- Standard (UNF) M Metric	-5 Heavy -6 Heavy Plus -7 Heavy Duty -8 Extra Heavy -9 Ultra Heavy		Standard No Button -NB No Button, Short Rod

Self-Compensating

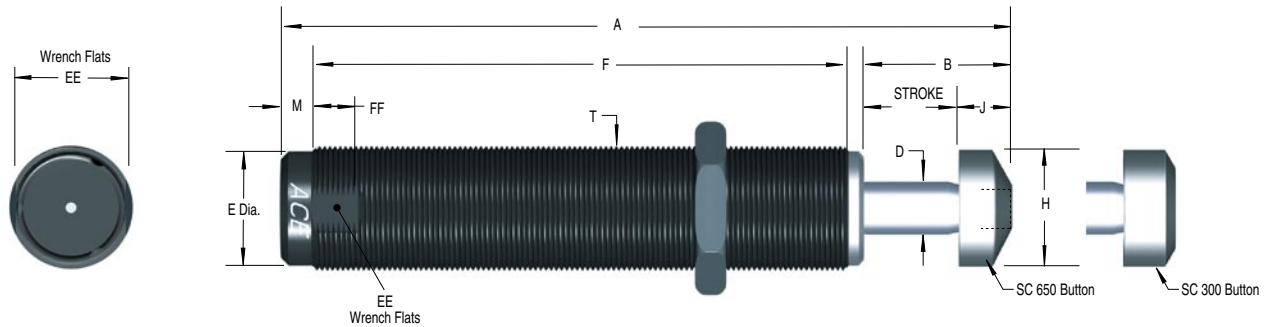

Dimensions in inches (millimeters)

Model	Stroke	A	B	D	E	F	G	H	J	M	T	EE	FF
SC 300-5-HC													
SC 300-6-HC													
SC 300-7-HC													
SC 300-8-HC													
SC 300-9-HC													
SC 300M5-HC	.33	3.88	.76	.25	.66	2.78	N/A	.66	.42	.28		11/16	.50
SC 300M6-HC	(8.5)	(98.7)	(19.2)	(6.3)	(16.8)	(70.6)		(16.8)	(10.7)	(7.1)		(17.4)	(12.7)
SC 300M7-HC													
SC 300M8-HC													
SC 300M9-HC													
SC 650-5-HC													
SC 650-6-HC													
SC 650-7-HC													
SC 650-8-HC													
SC 650-9-HC													
SC 650M5-HC	.59	5.20	1.02	.38	.86	3.80	N/A	.90	.43	.28		7/8	.50
SC 650M6-HC	(15.0)	(132.2)	(25.9)	(9.6)	(22.0)	(96.6)		(22.9)	(10.9)	(7.1)		(22.2)	(12.7)
SC 650M7-HC													
SC 650M8-HC													
SC 650M9-HC													

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
SC 300-5-HC	25 - 100 (11 - 45)					
SC 300-6-HC	75 - 300 (34 - 136)					
SC 300-7-HC	200 - 400 (91 - 181)	360 (41)	400,000	2.63 - 3.91	0.20	0.33
SC 300-8-HC	300 - 1,500 (136 - 680)	700 (79)	(45,194)	(11.70 - 17.39)		(0.15)
SC 300-9-HC	700 - 4,300 (318 - 1,950)					
SC 650-5-HC	50 - 250 (23 - 113)					
SC 650-6-HC	200 - 800 (91 - 363)					
SC 650-7-HC	700 - 2400 (317 - 1089)	1,200	600,000	4.94 - 8.30	0.20	0.76
SC 650-8-HC	1,700 - 5,800 (771 - 2,631)	(135)	(67,791)	(21.97 - 36.92)		(0.34)
SC 650-9-HC	4,000 - 14,000 (1,814 - 6,350)					

Technical Data

Impact velocity range:

SC 300-5-HC: 1.39 to 8.79 ft/sec (0.42 to 2.68 m/sec)

SC 300-6-HC: 0.80 to 5.07 ft/sec (0.24 to 1.55 m/sec)

SC 300-7-HC: 0.69 to 3.11 ft/sec (0.21 to 0.95 m/sec)

SC 300-8-HC: 0.36 to 2.54 ft/sec (0.11 to 0.77 m/sec)

SC 300-9-HC: 0.21 to 1.66 ft/sec (0.06 to 0.51 m/sec)

SC 650-5-HC: 1.60 to 11.34 ft/sec (0.49 to 3.46 m/sec)

SC 650-6-HC: 0.90 to 5.67 ft/sec (0.27 to 1.73 m/sec)

SC 650-7-HC: 0.52 to 3.03 ft/sec (0.16 to 0.92 m/sec)

SC 650-8-HC: 0.33 to 1.95 ft/sec (0.10 to 0.59 m/sec)

SC 650-9-HC: 0.21 to 1.27 ft/sec (0.06 to 0.39 m/sec)

Oil Type: ACE #5

Operating temperature: 32° to 150°F (0° to 66°C)

Mechanical stop: Integral mechanical stop built into front of units.

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

Adjustable

ACE MA Series miniature shock absorbers offer a compact design with true linear deceleration, and are adjustable over a wide range of conditions. If your preference is a fully adjustable shock absorber rather than a self-compensating model on your application, then the MA Series provides a directly interchangeable alternative.


These adjustable models feature long stroke lengths, **MA 900 with 1.58 inch (40 mm) superstroke**, to provide smooth deceleration and low reaction forces. The MA 150 incorporates the proven rolling diaphragm seal (used on the MC 150 to MC 600 range) and shares all the advantages of that technology.

Applications include: material handling, medium robotics, pick and place systems, machine tool and packaging equipment.



MA Series MA 225 to 900 Shown

Adjustable

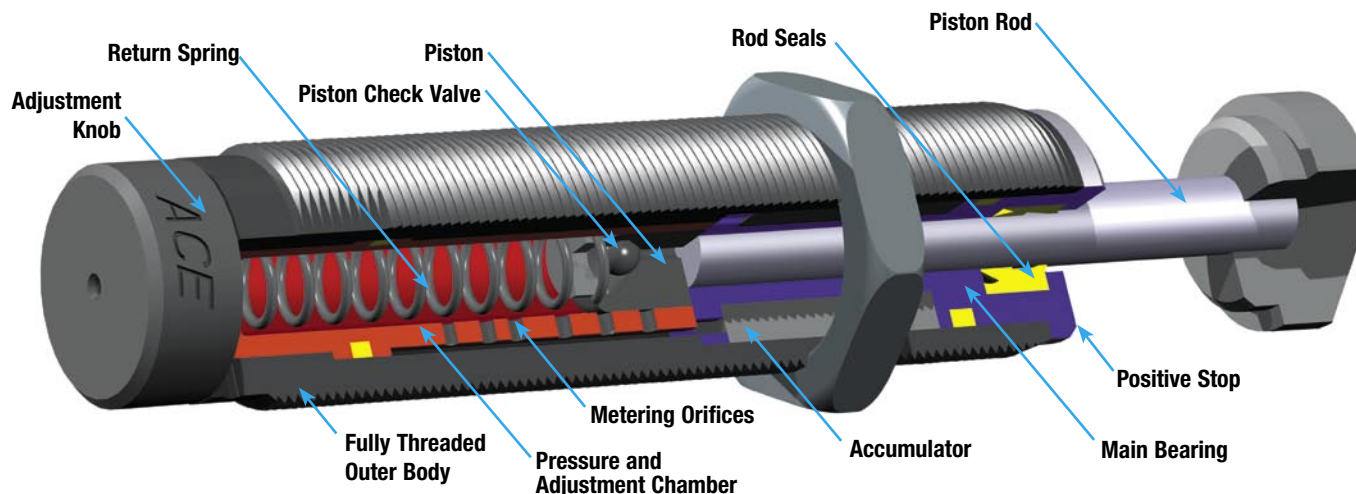

Ordering Information


MA 225 -

MA Series	Model Number	Mounting Thread	Button Options
MA = Miniature Adjustable	30	MA 30M	MA 30M
	35	M Metric	Standard with Button
	50	MA 35 to MA 900	-NB No Button, Short Rod
	150	- Standard (UNF)	MA 35
	225	M Metric	Standard with Button
	600	ME Fine Metric (MA 150 only)	-NB No Button, Short Rod
	900	MA 50M	MA 50M
		M Metric	Standard No Button
			-B Button (Steel with Elastomer Insert)
			MA 150
			Standard No Button
			-B Nylon Button
			-BS Steel Button
			MA 225-900
			Standard Steel Button
			-NB No Button, Short Rod
			-880 No Button, Standard Rod

Button Option: MA 30 to MA 900

The ACE **steel button/urethane cap assembly (-BP)** is available if more quiet equipment operation is desired.

Adjustable

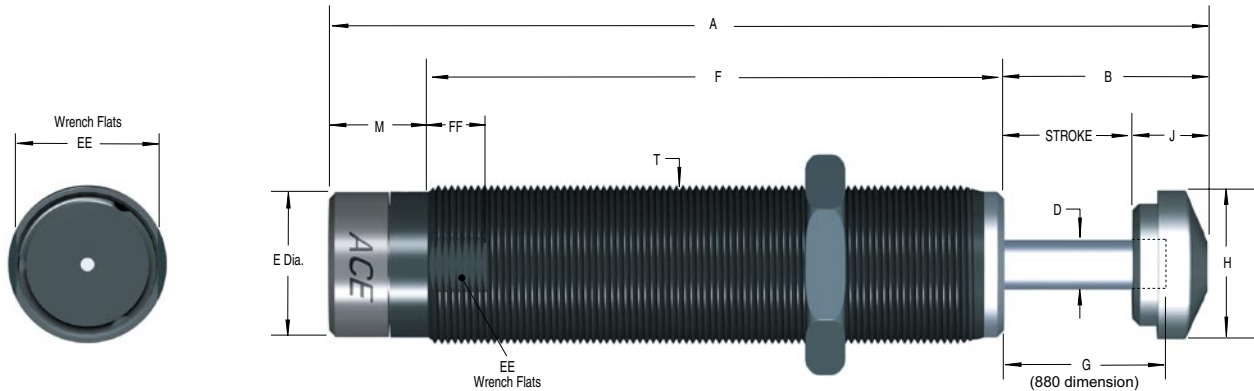

See page 43 for steel button/urethane cap assembly (-BP) dimensions.

Dimensions in inches (millimeters)

Model	Stroke	A	B	D	E	F	G	H	J	M	T	EE	FF
MA 30M	.32 (8.1)	2.42 (61.4)	.52 (13.2)	.10 (2.5)	.25 (6.5)	1.64 (41.7)	N/A	.25 (6.5)	.20 (5.0)	.16 (4.1)	M8x1	N/A	N/A
MA 35	.40 (10.1)	3.31 (84.1)	.72 (18.3)	.13 (3.3)	.42 (10.6)	2.41 (61.2)	N/A	.30 (7.6)	.32 (8.0)	.18 (4.6)	1/2-20 UNF M12x1	N/A	N/A
MA 50M	.28 (7.2)	*2.55 (64.7)	.69 (17.5)	.12 (3.2)	.34 (8.5)	1.66 (42.2)	N/A	.30 (7.7)	.31 (7.8)	.20 (5.1)	M10x1	N/A	N/A
MA 150	.50 (12.7)	**3.67 (93.2)	.95 (24.1)	.19 (4.8)	.46 (11.6)	2.44 (62.0)	.70 (17.7)	.47 (11.9)	.43 (11.0)	.28 (7.1)	9/16-18 UNF M14x1.5 M14x1	.49 (12.7)	.50 (12.7)
MA 150M													
MA 150ME													
MA 225	.75 (19.1)	4.67 (118.6)	1.18 (30.0)	.19 (4.8)	.66 (16.8)	2.94 (74.7)	1.00 (25.3)	.66 (16.8)	.43 (11.0)	.55 (14.0)	3/4-16 UNF M20x1.5	11/16 (18.0)	.50 (12.7)
MA 225M													
MA 600	1.00 (25.4)	5.62 (142.7)	1.43 (36.3)	.25 (6.3)	.88 (22.4)	3.54 (90.0)	1.25 (31.8)	.90 (22.9)	.43 (11.0)	.65 (16.5)	1-12 UNF M25x1.5	7/8 (23.0)	.50 (12.7)
MA 600M													
MA 900	1.58 (40.0)	7.44 (189.0)	2.01 (51.1)	.25 (6.3)	.88 (22.4)	4.78 (121.4)	1.85 (46.4)	.90 (22.9)	.43 (11.0)	.65 (16.5)	1-12 UNF M25x1.5	7/8 (23.0)	.50 (12.7)
MA 900M													

* A dimension w/o button is 2.24 (57.0) ** A dimension w/o button is 3.42 (86.7)

Specifications

	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	E ₄ Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
MA 30M	0.5 - 31.0 (0.23 - 15.0)	31 (3.5)	50,000 (5,650)	1.16 - 1.57 (5.1 - 7)	0.30	.02 (0.009)
MA 35	13 - 125 (6 - 57)	35 (4)	53,000 (5,988)	1.20 - 2.60 (5.33 - 11.56)	0.17	.10 (0.04)
MA 50M	10 - 45 (4.5 - 20.4)	50 (5.6)	120,000 (13,440)	.47 - 1.8 (2.1 - 8.0)	0.2	0.05 (0.022)
MA 150	2 - 240 (0.91 - 109)	200 (23)	300,000 (33,890)	0.70 - 1.20 (3.12 - 5.34)	0.40	.12 (0.05)
MA 225	5 - 500 (2 - 227)	225 (25)	400,000 (45,190)	1.05 - 2.15 (4.67 - 9.56)	0.10	.28 (0.13)
MA 600	20 - 3,000 (9 - 1,361)	600 (68)	600,000 (67,790)	2.40 - 6.87 (10.67 - 30.56)	0.20	.67 (0.30)
MA 900	30 - 4,500 (14 - 2,041)	900 (102)	800,000 (90,380)	2.40 - 7.40 (10.67 - 32.92)	0.40	.87 (0.39)

Technical Data

Impact velocity range

MA 30M: 2.2 - 14.6 ft/sec (0.67 - 4.45 m/sec)

MA 35: Maximum 3.3 ft/sec (1.0 m/sec)

MA 50M: 2.4 to 5.2 ft/sec (.73 to 1.6 m/sec)

MA 150, 225, 600, 900: 0.5 to 12 ft/sec (0.15 to 3.66 m/sec)

Operating Temperature: 32° to 150°F (0° to 66°C)

Mechanical Stop: Integral mechanical stop built into front of units.

Oil type:

MA 30M, MA 35: ACE #5

MA 50M: CADCO X-900

MA 150: Silicone

MA 225, 600, 900: ATF

Materials: Steel body with black oxide finish. Hardened stainless steel piston rod.

Adjustment: On models MA 30M, MA 35, MA 50M and MA 150: by turning the adjustment screw at rear. On the larger sizes: by turning the adjustment knob against the scale marked 0 to 9. After installation, cycle the machine a few times and turn the adjustment knob until optimum deceleration is achieved (i.e. smooth deceleration throughout stroke).

Hard impact at start of stroke-turn adjuster toward 9.

Hard set-down at end of stroke-turn adjuster toward 0.

Technical data applies to standard and metric threaded models.


Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

MA 150 models may be mounted into pressure chambers of pneumatic actuators.

Lock nut included with each shock absorber.

MA 35 and MA 150 models can be utilized as velocity controls.

Adjustable

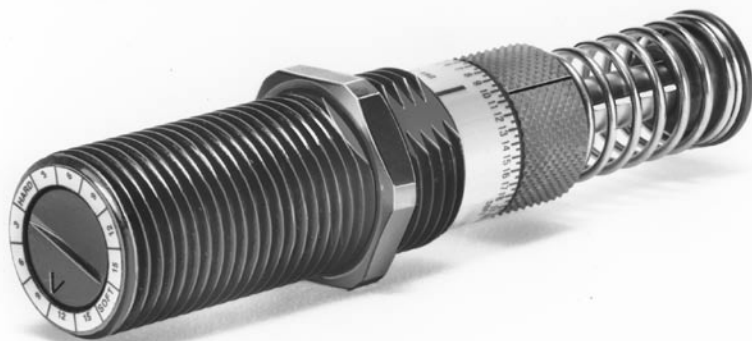

ACE Controls 3/8 x 1" bore adjustable miniature shock absorber offers high energy capacity and a wide effective weight range for handling a variety of applications. A unique feature of the multi-orifice 3/8 x 1" bore is the optional rear slot adjuster. Adjustment can be made by turning the frontal adjuster to the preferred setting, or by turning the rear slot adjuster if desired.

Applications include: slides, material handling equipment, robotics, machine tools, pick and place systems, packaging equipment and more.

Technical Data

Impact velocity range: 1.6 - 15 ft/sec (0.49 - 4.6 m/sec)

Operating temperature: 10° to 150°F (-12° to 66°C)

Oil type: CADCO X-900

Materials: Steel body with black oxide finish. Piston rod high tensile steel, hardened and chrome plated.

Technical data applies to standard and metric threaded models.

Maximum side load depends on application. For additional information contact ACE Controls' Applications Department.

Lock nut included with each shock absorber.

Ordering Information

AS 3/8 x 1					
Return Method & Accumulator Style	Bore	Stroke	Mounting Thread	Button Options	Adjuster
AS Spring Return, Internal Accumulator NA Mechanical (clevis) Return, Internal Accumulator	3/8		– Standard UNF M Metric	Standard with Button	-D Optional Rear Adjuster For Double Adjustment

ACE Controls Inc. US Patents

SC² 190 to SC² 925 (0 to -4) Miniature Shock Absorbers


Self-compensating (patent no. 5,682,967)

Soft contact (patent no. 5,566,794)

3/8 x 1" Bore Miniature Adjustable Shock Absorber (patent no. 6,974,002)

Piston Tube (patent no. 6,006,873)


Adjustable

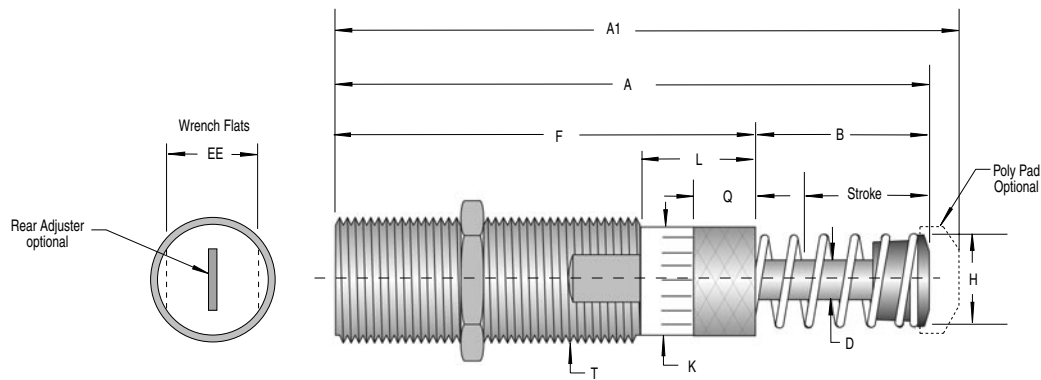

Dimensions in inches (millimeters)

Model	Stroke	A	A1	B	D	F	H	K	L	Q	T	EE
AS 3/8 x 1	1	4.75	5.00	1.38	0.31	3.37	0.75	0.87	0.93	0.5	1-12	0.88
AS 3/8 x 1M	(25.4)	(120.7)	(127.0)	(35.0)	(7.9)	(85.6)	(19.1)	(22.1)	(23.6)	(12.7)	(M25 x 1.5)	(22.2)

Clevis Mount

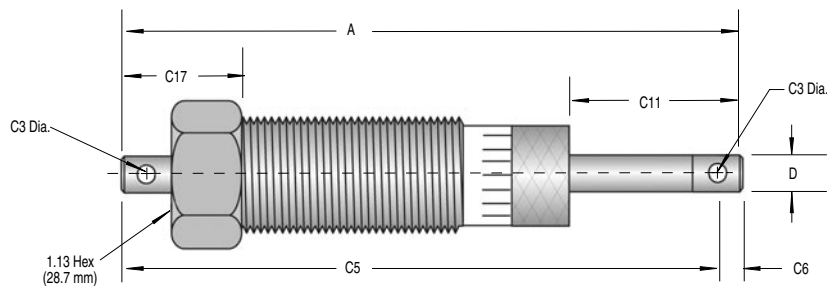


Model	A	C3	C5	C6	C11	C17	D
NA 3/8 x 1	5.50	0.16	5.13	0.19	1.50	1.06	0.31
	(139.7)	(4.0)	(130.2)	(4.8)	(38.1)	(27.0)	(7.9)


Specifications

	We	E ₃	E ₄	Return Force	Return Time	Shipping Weight
	Effective Weight lbs (kg)	Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour)	lbs (N)	sec	lbs (kg)
3/8 x 1	10 -1,250	600	600,000	6 - 11	0.03	.049
3/8 x 1M	(4.5 - 545)	(68)	(67,791)	(27 - 49)		(0.22)

Mounting Block

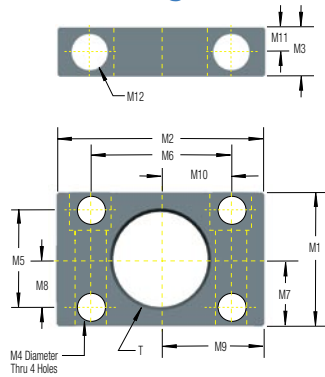


Lock Nut



One lock nut included with each shock absorber where appropriate.

Stop Collar



Side load adapters are available for select models, see pages 44 and 45.

Mounting Block in inches (millimeters)


Lock Nut

Stop Collar

Used With	Part #	T	M1	M2	M3	M4	M5	M6	M7	M8	M9	M10	M11	M12	Part#	N1	N2	N3	Part#	S1	S2
MC 9M	N/A	M6x0.5													250-0716	.31 (8)	.36 (9.3)	.09 (2.5)	N/A		
MC 10E	N/A	M8x0.75													250-0362	.43 (11)	.48 (12.3)	.12 (3.0)	N/A		
MC 10M		M8x1													250-0482	.39 (10.0)	.44 (11.3)	.12 (3.0)			
MC 30M	N/A	M8x1													250-0482	.43 (11)	.49 (12.5)	.12 (3.0)	N/A		
MA 30M																					
MC 25	250-0306	3/8-32 UNF												.18 Dia.Thru .31 C'Bore x .20 Deep #8-32 Soc. Hd. Screw	250-0404	.50 (12.7)	.56 (14.2)	.09 (2.3)	250-0406	.81 (20.6)	.56 (14.2)
MC 25M	250-0307	M10x1	1.00 (25.4)	1.50 (38.1)	.56 (14.2)	See DIM M12	0 (0)	1.00 (25.4)	.50 (12.7)	0 (0)	.75 (19.1)	.50 (12.7)	.28 (7.1)	(4.5) Dia.Thru (8) C'Bore x (5) Deep M4x7 Soc. Hd. Screw	250-0315	.47 (12.0)	.53 (13.6)	.16 (4.0)	250-0408	.79 (20.0)	.56 (14.3)
SC 25M																					
SC 25MHC	250-0308	1/2-20 UNF												.18 Dia.Thru .31 C'Bore x .20 Deep #8-32 Soc. Hd. Screw	250-0405	.62 (16.5)	.70 (17.8)	.13 (3.3)	250-0407	.81 (20.6)	.62 (15.7)
MA 50M																					
MA 35M	250-0309	M12x1	1.00 (25.4)	1.50 (38.1)	.56 (14.2)	See DIM M12	0 (0)	1.00 (25.4)	.50 (12.7)	0 (0)	.75 (19.1)	.50 (12.7)	.28 (7.1)	(4.5) Dia.Thru (8) C'Bore x (5) Deep M4x7 Soc. Hd. Screw	250-0317	.55 (14.0)	.62 (15.8)	.20 (5.0)	250-0409	.79 (20.0)	.63 (16.0)
MC 75M																					
SC 75M	250-0318	9/16-18 UNF	1.37 (34.8)	1.81 (46.0)	.62 (15.7)	.22 (5.6)	1.00 (25.4)	1.38 (35.1)	.69 (17.5)	.50 (12.7)	.91 (23.1)	.69 (17.5)	.31 (7.9)	.21 Dia.Thru .32 C'Bore x .32 Deep #10-32 Soc. Hd. Screw	250-0231	.87 (22.2)	1.00 (25.4)	.31 (7.9)	250-0271	.75 (19.1)	.69 (17.5)
SC 75MHC																					
MA 150M	250-0352	M14x1.5	1.10 (28.0)	1.77 (45.0)	.63 (16.0)	.18 (4.5)	0 (0)	1.38 (35.0)	.55 (14.0)	0 (0)	.89 (22.5)	.69 (17.5)	.31 (7.9)	(4.5) Dia.Thru (8) C'Bore x (5) Deep M4x7 Soc. Hd. Screw	250-0233	.67 (17.0)	.76 (19.4)	.23 (6.0)	250-0272	.79 (20.0)	.69 (17.5)
MC 150M																					
SC 190M	N/A	M14x1													250-0232	.67 (17.0)	.77 (19.5)	.20 (5.0)	250-0261	.75 (19.0)	.71 (18.0)
SC 190MHC																					
MC 225M	250-0401	3/4-16 UNF	1.50 (38.1)	2.00 (50.8)	.62 (15.7)	.22 (5.6)	1.12 (28.4)	1.50 (38.1)	.75 (19.1)	.56 (14.2)	1.00 (25.4)	.75 (19.1)	.31 (7.9)	.22 Dia.Thru .33 C'Bore x .45 Deep #10-32 Soc. Hd. Screw	250-0399	1.00 (25.4)	1.15 (29.2)	.25 (6.4)	250-0403	1.25 (31.8)	1.00 (25.4)
MVC 225M																					
SC 300M	250-0353	M20x1.5	1.38 (35.0)	1.85 (47.0)	.63 (16.0)	.22 (5.6)	1.00 (25.4)	1.38 (35.0)	.69 (17.5)	.50 (12.7)	.93 (23.5)	.69 (17.5)	.31 (7.9)	(5.5) Dia.Thru (10) C'Bore x (10) Deep M5x8 Soc. Hd. Screw	250-0207	.90 (23.0)	.96 (24.6)	.31 (8.0)	250-0410	.98 (25.0)	.98 (25.0)
SC 300MHC																					
MC 600M	250-0402	1-12 UNF	1.50 (38.1)	2.00 (50.8)	.62 (15.7)	.22 (5.6)	1.12 (28.4)	1.50 (38.1)	.75 (19.1)	.56 (14.2)	1.00 (25.4)	.75 (19.1)	.31 (7.9)	.22 Dia.Thru .33 C'Bore x .45 Deep #10-32 Soc. Hd. Screw	250-0400	1.25 (31.8)	1.44 (36.6)	.25 (6.4)	250-0275	1.75 (44.5)	1.25 (31.8)
MA 600M																					
MVC 600M	250-0402														0801-041	1.50 (38.1)	1.73 (44.0)	.57 (14.6)	250-0275	2.19 (55.6)	1.25 (31.8)
SC 650M																	1.25 (31.8)	1.44 (36.6)			
MA 900M	250-0402														250-0400	1.25 (31.8)	1.44 (36.6)	.31 (7.9)	3120-34000	1.77 (45.0)	1.26 (32.0)
MVC 900M																					
SC 925M	250-0044	M25x1.5	1.38 (35.0)	1.85 (47.0)	.63 (16.0)	.22 (5.6)	1.00 (25.4)	1.38 (35.0)	.69 (17.5)	.50 (12.7)	.93 (23.5)	.69 (17.5)	.31 (7.9)	(5.5) Dia.Thru (10) C'Bore x (10) Deep M5x8 Soc. Hd. Screw	250-0040	1.18 (30.0)	1.24 (31.6)	.39 (10.0)	250-0276	1.26 (32.0)	1.18 (30.0)
AS3/8x1M																					
	250-0044														250-0040				3120-34501	2.19 (55.6)	1.25 (31.8)

Air Bleed Collar




Used With	Part#
MC 150 M	SP-14-10781
MC 225 M	SP-20-10782
MC 600 M	SP-25-10783



Lock Nut

Used with	Part #	N1	N2	N3
SC 650 (-5 to -9)	0801-041	1.50 (38.1)	1.73 (44.0)	.57 (14.6)
SC 650M (-5 to -9)	250-0040	1.18 (30.1)	1.36 (34.6)	.31 (7.9)

StopLight™

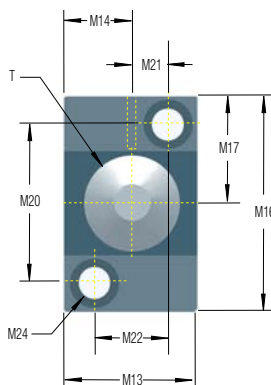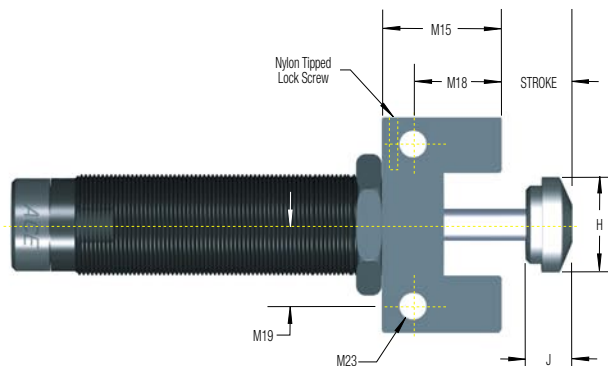

Mounting Block in inches (millimeters)

Used With	Part #	T	H	J	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23	M24
MA 150* MC 150* SC 190	250-0377	9/16-18 UNF	.47 (11.9)	.43 (10.9)	.75 (19.0)	.38 (22.3)	.88 (22.3)	1.25 (31.8)	.63 (15.9)	.57 (14.5)	.44 (11.1)	.88 (22.2)	.19 (4.7)	.38 (9.5)	.180 (4.6)	.315 (8.0)
MA 150M* MC 150M* SC 190M	250-0378	M14x1.5														
MC 225* MA 225 MVC 225 SC 300	250-0379	3/4-16 UNF	.66 (16.8)	.43 (10.9)	.94 (23.8)	.47 (11.9)	.94 (23.8)	1.56 (39.6)	.78 (19.8)	.63 (16.0)	.55 (14.0)	1.10 (28.0)	.24 (6.0)	.47 (12.0)	.216 (5.5)	.394 (10.0)
MC 225M* MA 225M MVC 225M SC 300M	250-0380	M20x1.5														
MC 600* MA 600 MVC 600 MA 900 MVC 900 SC 650 SC 925	250-0381	1-12 UNF	.90 (22.9)	.43 (10.9)	1.18 (30.0)	.59 (15.0)	1.00 (25.4)	1.75 (44.5)	.88 (22.3)	.63 (16.0)	.63 (16.0)	1.26 (32.0)	.31 (8.0)	.63 (16.0)	.216 (5.5)	.394 (10.0)
MC 600M* MA 600M MVC 600M MA 900M MVC 900M SC 650M SC 925M	250-0382	M25x1.5														


StopLight™ Switches are available in both NPN and PNP styles. Part numbers are 250-3 NPN and 250-3 PNP, respectively. The switches can be used with any StopLight mounting blocks.

* A complete StopLight assembly includes mounting block, proximity switch and steel button. Use the table below to order MC Series buttons. Steel buttons are an integral part of series MA and SC² and MVC units. Shock absorbers are ordered separately.

Model	Steel Button Part #
MA 150, MA 150M	250-0383
MC 150, MC 150M	250-0111
MC 225, MC 225M	250-0112
MC 600, MC 600M	250-0113

Specifications

DC 2-Wire Type I/O Circuit Diagram

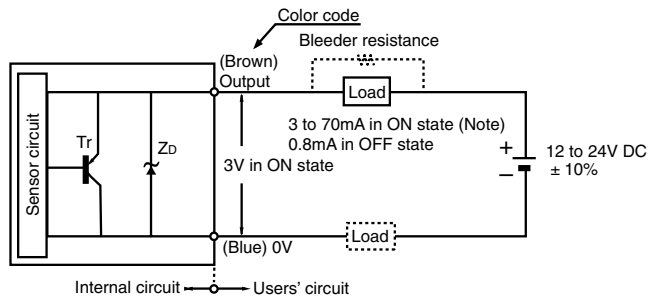

Detecting Distance: 2.5 mm ± 15% (with standard target)

Setting Distance: 0 to 1.9 mm (with standard target)

Standard Target: Iron: 15 x 15 x 1 mm

Differential Travel: 10% max of detecting distance

Supply Voltage: 12 to 24 V DC, ripple (P-P)" 10% max

Current Consumption: 3-70 mA (at 24 V DC with no load)

Response Frequency: 1 KHz min.

Control Output:

- Max load current: 50 mA
- Switching capacity: 30 V DC max
- Residual voltage: 3.0 V max


Ambient Temperature: Operating: -25° to 70°C

Storage: -40° to 85°C

Humidity: Operating: 45% to 80%

Storage: 35% to 95%

The steel button/urethane cap assembly for noise level reduction is available for the models listed below.

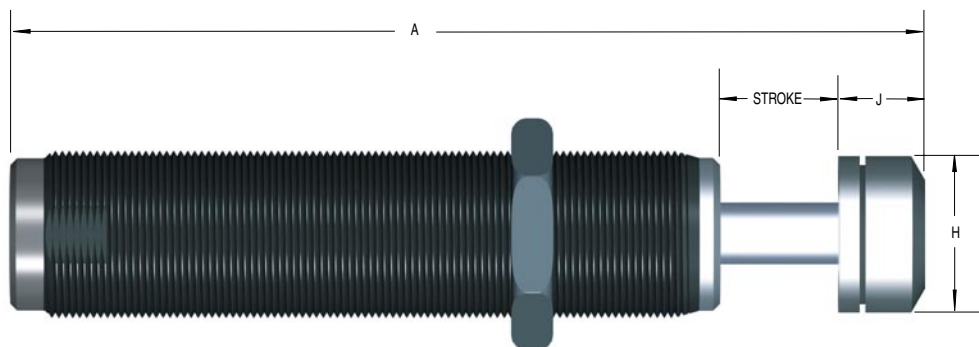

Dimensions in inches (millimeters)



Model	Stroke	A	H	J
MA 30	0.32 (8.0)	2.45 (62.2)	0.25 (6.4)	0.23 (5.8)
MA 35	0.40 (10.2)	3.36 (85.4)	0.43 (10.8)	0.38 (9.5)
MA 150	0.52 (13.1)	3.73 (94.7)	0.48 (12.2)	0.48 (12.2)
MA 225	0.73 (18.5)	4.73 (120.2)	0.68 (17.2)	0.52 (13.1)
MA 600	0.99 (25.0)	5.74 (145.8)	0.91 (23.1)	0.58 (14.6)
MA 900	1.56 (39.6)	7.57 (192.2)	0.91 (23.1)	0.58 (14.6)
MC 25	0.26 (6.6)	2.33 (59.2)	0.43 (10.8)	0.38 (9.5)
MC 30	0.32 (8.0)	2.16 (54.9)	0.25 (6.4)	0.23 (5.8)
MC 75	0.40 (10.2)	2.79 (70.9)	0.43 (10.8)	0.38 (9.5)
MC 150	0.50 (12.7)	3.73 (94.7)	0.48 (12.2)	0.48 (12.2)
MC 225	0.50 (12.7)	4.15 (105.5)	0.68 (17.2)	0.52 (13.1)
MC 600	1.00 (25.4)	5.95 (151.0)	0.91 (23.1)	0.58 (14.6)
SC 190 (-1 to -4)	0.60 (15.2)	4.51 (114.6)	0.48 (12.2)	0.48 (12.2)
SC 190 (-5 to -7)	0.47 (12.0)	4.00 (101.6)	0.48 (12.2)	0.48 (12.2)
SC 300 (-1 to -4)	0.73 (18.5)	4.69 (119.0)	0.68 (17.2)	0.52 (13.1)
SC 650 (-1 to -4)	0.99 (25.0)	5.75 (145.9)	0.91 (23.1)	0.58 (14.6)
SC 925	1.56 (39.6)	7.57 (192.3)	0.91 (23.1)	0.58 (14.6)
MVC 225	0.73 (18.5)	4.73 (120.2)	0.68 (17.2)	0.52 (13.1)
MVC 600	0.99 (25.0)	5.74 (145.8)	0.91 (23.1)	0.58 (14.6)
MVC 900	1.56 (39.6)	7.57 (192.2)	0.91 (23.1)	0.58 (14.6)



For Side Load in Excess of 5°

With side load impact angles of more than 5° the operating lifetime of the shock absorber reduces rapidly due to increased wear of the rod bearings. The optional side load adapter provides a long lasting solution.

Material: Threaded body and plunger, hardened high tensile steel

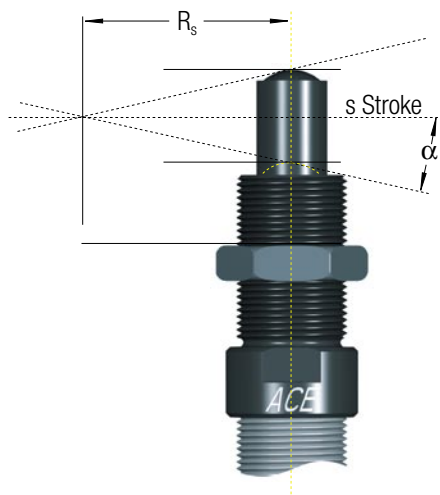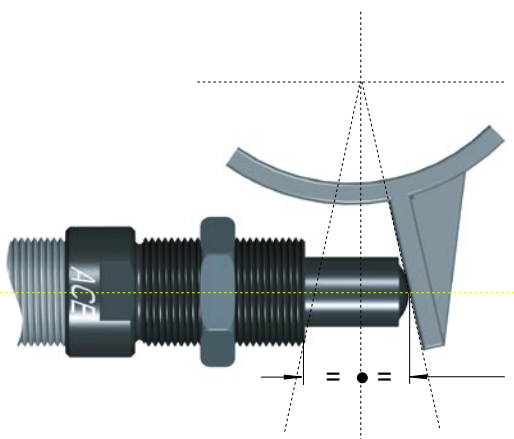

Problem: Rotary motion of the striking surface creates side load, which develops a bending moment on the piston rod. This can bend the rod in some cases. In all cases, side load will reduce seal and bearing life.

Solution: Use side load adapter.

Formula:

$$\alpha = \tan^{-1} \left(\frac{s}{2 \cdot R_s} \right) \quad R_{smin} = \frac{s}{2 \cdot \tan \alpha_{max}}$$

Example: $s = .98$ (25mm) $\alpha_{max} = 25^\circ$ (adapter 250-0560)

$$R_s = 3.94 \text{ (100mm)} \quad R_{smin} = \frac{.98}{2 \cdot \tan 25}$$

$$\alpha = \tan^{-1} \left(\frac{.98}{2 \cdot 3.94} \right) \quad R_{smin} = 1.05 \text{ (27mm)}$$

$$\alpha = (7.09)^\circ$$


α = angle of impact

α_{max} = maximum angle of impact

s = stroke

R_s = radius

R_{smin} = minimum radius

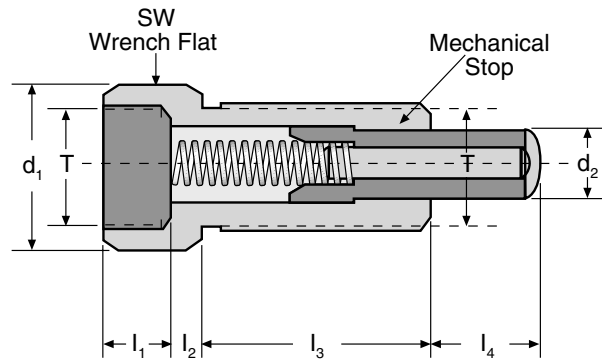

Miniature Series Side Load Adapters Dimensions in inches (millimeters)

MC, MVC Series Model	SC Series Model	MA Series Model	Side Load Adapter	T	d ₁	d ₂	l ₁	l ₂	l ₃	l ₄	SW	Maximum Side Load (α)
MC 150M	N/A	MA 150M	250-0558	M14 x 1.5	0.70 (18)	0.35 (9)	0.31 (8)	0.15 (4)	0.78 (20)	0.49 (12.5)	0.62 (16)	25°
MC 225M	N/A	N/A	250-0559	M20 x 1.5	0.94 (24)	0.47 (12)	0.39 (10)	0.15 (4)	0.78 (20)	0.49 (12.5)	0.86 (22)	25°
MC 600M	N/A	N/A	250-0560	M25 x 1.5	1.18 (30)	0.62 (16)	0.39 (10)	0.23 (6)	1.50 (38)	0.98 (25)	1.06 (27)	25°
N/A	SC 190M-880*	N/A	250-0080	M14 x 1.5	0.70 (18)	0.35 (9)	0.39 (10)	0.15 (4)	1.02 (26)	0.62 (16)	0.62 (16)	25°
MVC 225M-880*	SC 300M-880*	MA 225M-880*	250-0081	M20 x 1.5	0.94 (24)	0.47 (12)	0.39 (10)	0.15 (4)	1.25 (32)	0.75 (19)	0.86 (22)	25°
MVC 600M-880*	SC 650M-880*	MA 600M-880*	250-0082	M25 x 1.5	1.18 (30)	0.62 (16)	0.39 (10)	0.23 (6)	1.50 (38)	0.98 (25)	1.06 (27)	25°


* The -880 = No button, standard rod

ACE Controls recommends that side load not exceed 5°. Maximum side load depends on application, shock absorber model, and stroke length. For additional information consult ACE's Applications Department.


Note: The side load adapter for miniature models can only be installed on select metric shock absorbers without a rod end button.

Magnum Group Side Load Adapters for Side Load Impact Angles from 5° to 25°


For MC, MA, ML 3325M - Part No. 250-0736

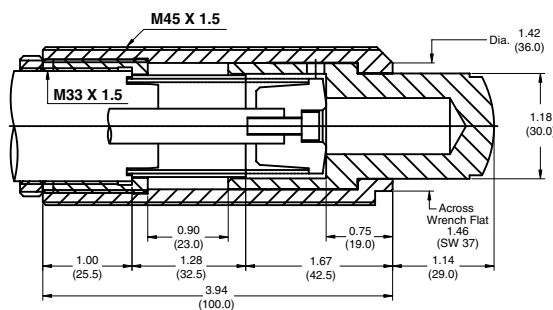

For MC, MA, ML 3350M - Part No. 250-0750

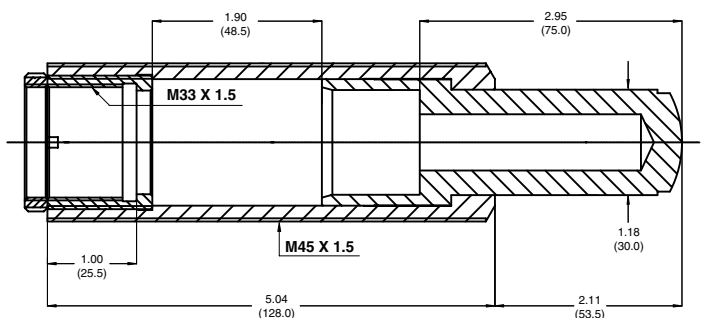

For MC, MA, ML 4525M - Part No. 250-0739

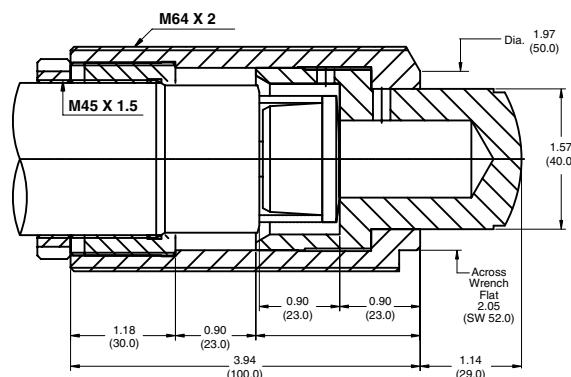

Additional Adapters:

Side load adapters now available for:

MC 75, 225 & 600 (UNF)

MC, MA, ML 4550M (M45 x 1.5)

ML 6425M (M64 x 2)

MC, MA, ML 6450M (M64 x 2)

Self-Compensating

Magnum Group...
Named One of Best Products of the
Year in Fluid Power by Design News.



Materials: Steel with black oxide finish. Piston rod high tensile steel, hardened and chrome plated. Rod end button hardened steel with black oxide finish. Zinc plated return spring. For optimum heat dissipation, **do not** paint shock absorber.

ACE Controls presents the ultimate in industrial shock absorber design...the Magnum Group. These versatile performers offer you the capability to mount shock absorbers that contain the highest energy capacity ratings in the industry. **Up to 150% of the energy per cycle** of previous models in the same package size, means increased safety factors in a wider range of applications.

Up to 390% of the effective weight capacity of previous models, may allow a smaller, lower priced shock absorber to be mounted, to meet your application requirements.

All Magnum Group shock absorbers are **fully threaded** for ease of installation. **Incorporation of high strength materials** along with an **integral stop collar** translates to extended shock absorber life and cost savings for you.

Applications include: automotive manufacturing and production equipment, large robotics, heavy conveyors, packaging and glass bottling equipment, rotary actuators, theme park rides, and lumber industry equipment.

Technical Data

Impact velocity range:

MC Models: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec)

Operating temperature: 10° to 150°F (-12° to 66°C)


Operating temperature, high-temp option:

Up to 300°F (149°C) for MC models except 4575 and 64150. It is available for MCA air return models including the 4575 and 64150. Add -HT to end of model code when ordering.

Oil type: ATF

Technical data applies to standard and metric threaded models.

Lock nut included with each shock absorber.

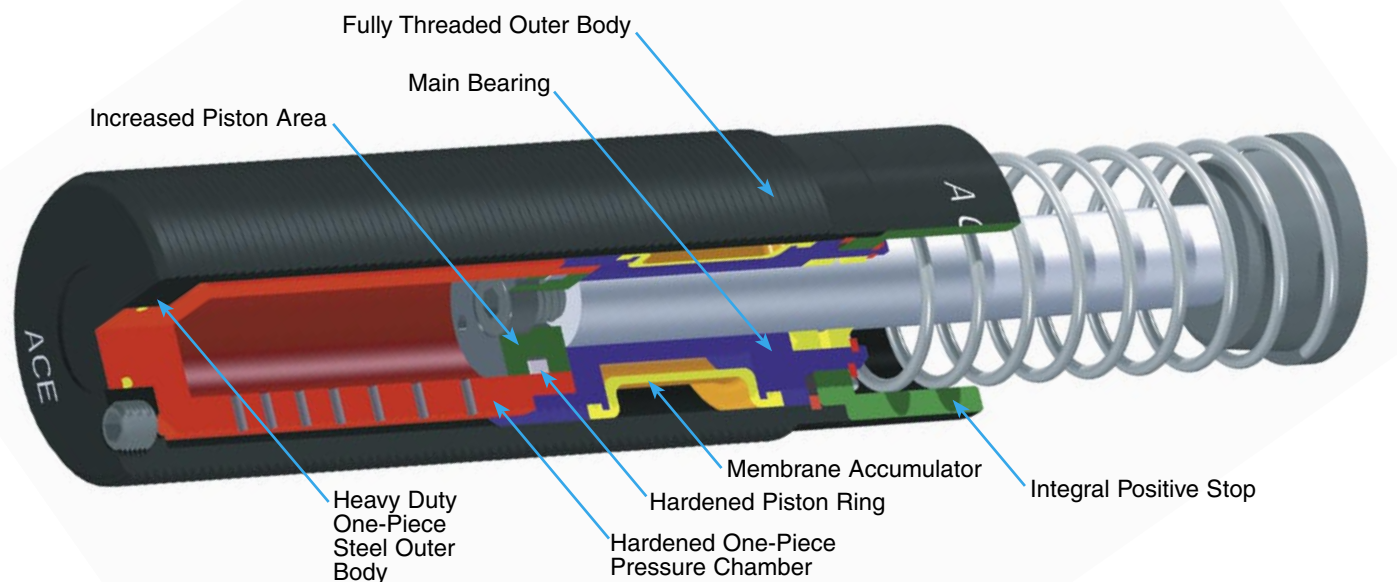Magnum Group **MC 33 to MC 64****Self-Compensating**

Adjustable

ACE Magnum Group adjustable shock absorbers feature the latest seal technology, a **hardened piston ring, pressure chamber and outer body** for increased operating life. Additionally, these rugged units offer the unique feature of **front or rear adjustment** along with a fully threaded outer body for ease of installation.

Magnum Group adjustable shock absorbers are **directly interchangeable** with previous ACE and competitor models.

Along with the self-compensating models, the adjustable range offers unprecedented increases in energy and effective weight capacity.

Applications are the same as self-compensating models.

Technical Data

Impact velocity range:

MA Models: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec)

ML Models: 0.06 to 1.5 ft/sec (0.02 to 0.46 m/sec)

Operating temperature: 10° to 150°F (-12° to 66°C)

Operating temperature, high-temp option:

Up to 300°F (149°C) for MA and ML models except 4575 and 64150. It is available for MAA and MLA air return models including the 4575 and 64150. Add -HT to end of model code when ordering.

Oil type: ATF

Materials: Steel with black oxide finish. Piston rod high tensile steel, hardened and chrome plated. Rod end button hardened steel with black oxide finish. Zinc plated return spring. For optimum heat dissipation, **do not** paint shock absorber.

Adjustment: After installation of the Magnum Group shock absorber, cycle the machine a number of times. Turn the front stop collar or the rear adjuster against the scale marked 0 to 9 until optimum deceleration is achieved (i.e. smooth deceleration throughout the stroke).



Hard impact at the start of stroke-turn adjuster toward 9
Hard set-down at end of stroke-turn adjuster toward 0.

Technical data applies to standard and metric threaded models.


ACE Controls recommends that side load not exceed 5°. Maximum side load depends on application. For additional information consult ACE's Applications Department.

Lock nut included with each shock absorber.

47

Magnum Group MA and ML 33 to 64

Adjustable

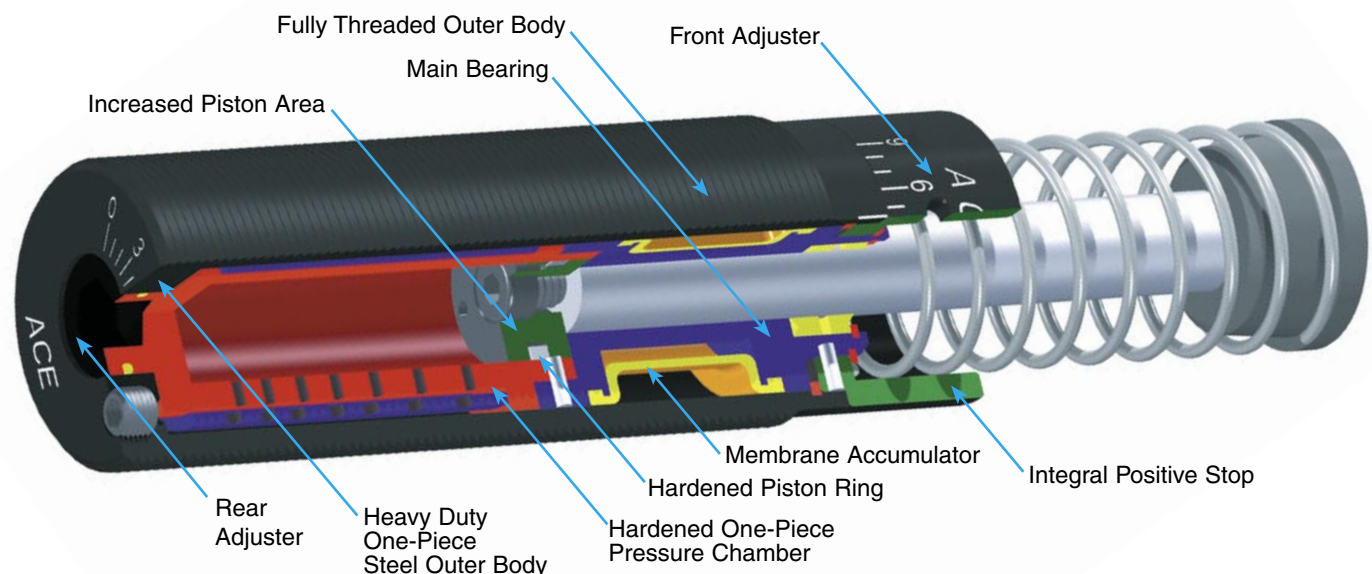


Self-Compensating and Adjustable




Primary Mount





Adjuster (MA and ML only)

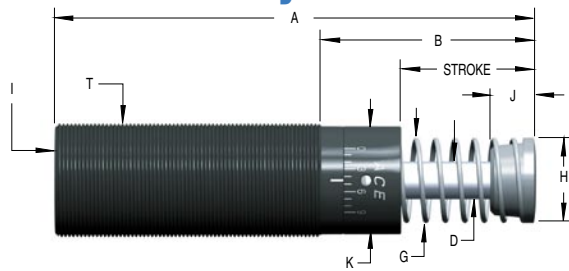

Clevis Mount

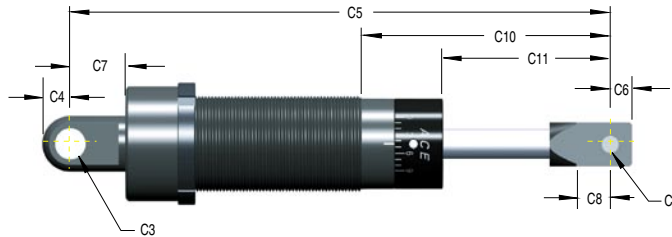

Side-Foot Mount

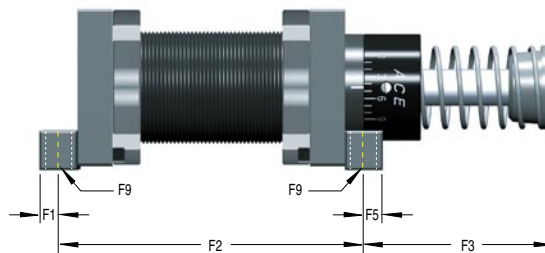

33 Model Dimensions in inches (millimeters)

Model	Stroke	A	B	D	G	H	I*	J	K	T	W	C1	C2	C3	C4
MC, MA, ML 3325	0.91 (23.1)	5.44 (138.1)	2.19 (55.6)	0.375 (9.5)	0.99 (25.1)	1.00 (25.4)	1/8 NPT MALE	0.75 (19.1)	1.15 (29.2)	1-1/4-12 M33x1.5	1.50 (38.10) 1.56 (39.71)	0.50 (12.7)	0.76 (19.3)	.2505 (6.40)	0.32 (8.1)
MC, MA, ML 3350	1.91 (48.5)	7.44 (189)	3.19 (81)												
Model	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	F1	F2	F3	F4	F5
MC, MA, ML 3325	6.58 (167)	0.25 (6.4)	0.48 (12.2)	0.50 (12.7)	.2505 (6.4)	2.64 (67.1)	1.36 (34.5)	0.50 (12.7)	0.75 (19.1)	N/A	0.25 (6.4)	3.75 (95.3)	1.94 (49.3)	0.87 (22.1)	0.25 (6.4)
MC, MA, ML 3350	8.58 (217.8)					3.64 (92.5)	2.36 (60)					4.75 (120.7)	2.94 (74.7)		
Model	F6	F7	F8	F9											
MC, MA, ML 3325	2.75 (69.9)	2.37 (60)	0.50 (12.7)	0.23 (5.9)											
MC, MA, ML 3350															

*For models MAA and MAS 33 the 1/8-27 male fitting is shipped with the shock. MAA and MAS 45 and 64 have pipe plugs.

Note: A side port can be adapted to Magnum 33 MAA, MAS, MCS, MLA and MLS models and is a special adder item. A side port adapter ring is molded onto the outer tube and increases the overall diameter by 0.25 inches (6.3 mm) in the area of the ring. The side port centerline is located 0.81 inches (20.7 mm) from the front of the outer tube. Add (-P) to the model ordering code if a side port is desired, see page 57.

Note: M 36 and 1-3/8 thread is optional.

Note: Poly pad available on 33 models only – part no. 250-0011.

Lock nut included with each shock absorber. See page 55 for dimensions.

Self-Compensating and Adjustable

36 Model **Dimensions** in inches (millimeters)

Model	Stroke	A	B	D	G	H	I*	J	K	T	W	C1	C2	C3	C4
MC, MA, ML 3625	0.91 (23.1)	5.44 (138.1)	2.19 (55.6)	0.375 (9.5)	0.99 (25.1)	1.00 (25.4)	1/8 NPT MALE	0.75 (19.1)	1.15 (29.2)	1-3/8-12 M36x1.5	1.75 (44.5)	N/A	N/A	N/A	N/A
MC, MA, ML 3650	1.91 (48.5)	7.44 (189)	3.19 (81)												
Model	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	F1	F2	F3	F4	F5
MC, MA, ML 3625															
MC, MA, ML 3650	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Model	F6	F7	F8	F9											
MC, MA, ML 3625															
MC, MA, ML 3650	N/A	N/A	N/A	N/A											

Specifications MC Series, Self Compensating

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)	External Accumulator (Re-circulating)			
MC 3325-1	20-80	(9-36)						
MC 3325-2	68-272	(31-123)						
MC 3325-3	230-920	(104-417)	1,350	670,000	1,100,000	10.3-19.8	0.03	1.00
MC 3325-4	780-3,120	(354-1,415)	(153)	(75,000)	(124,000)	(46-88)		(0.45)
MC 3350-1	40-160	(18-73)						
MC 3350-2	136-544	(62-247)						
MC 3350-3	460-1,840	(209-835)	2,700	760,000	1,200,000	9.9-30.3	0.06	1.2
MC 3350-4	1,560-6,240	(708-2,830)	(305)	(85,000)	(135,000)	(44-135)		(0.54)
MC 3625-1	20-80	(9-36)						
MC 3625-2	68-272	(31-123)						
MC 3625-3	230-920	(104-417)	1,350	670,000	1,100,000	10.3-19.8	0.03	1.23
MC 3625-4	780-3,120	(354-1,415)	(153)	(75,000)	(124,000)	(46-88)		(0.56)
MC 3650-1	40-160	(18-73)						
MC 3650-2	136-544	(62-247)						
MC 3650-3	460-1,840	(209-835)	2,700	760,000	1,200,000	9.9-30.3	0.06	1.51
MC 3650-4	1,560-6,240	(708-2,830)	(305)	(85,000)	(135,000)	(44-135)		(0.68)

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications MA Series, Adjustable

MA 3325	20-3,800	(9-1,724)	1,500 (169)	670,000 (75,000)	1,100,000 (124,000)	1,500,000 (169,000)	10.3-19.8 (46-88)	0.03	1.0 (0.45)
MA 3350	28-5,400	(13-2,449)	3,000 (339)	760,000 (85,000)	1,200,000 (135,000)	1,600,000 (180,000)	9.9-30.3 (44-135)	0.06	1.2 (0.54)
MA 3625	20-3,800	(9-1,724)	1,500 (169)	670,000 (75,000)	1,100,000 (124,000)	1,500,000 (169,000)	10.3-19.8 (46-88)	0.03	1.23 (0.56)
MA 3650	28-5,400	(13-2,449)	3,000 (339)	760,000 (85,000)	1,200,000 (135,000)	1,600,000 (180,000)	9.9-30.3 (44-135)	0.06	1.51 (0.68)

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications ML Series, Low Velocity Adjustable

ML 3325			1,500 (169)	670,000 (75,000)	1,100,000 (124,000)	1,500,000 (169,000)	10.3-19.8 (46-88)	0.03	1.0 (0.45)
ML 3350			3,000 (339)	760,000 (85,000)	1,200,000 (135,000)	1,600,000 (180,000)	9.9-30.3 (44-135)	0.06	1.2 (0.54)
ML 3625			1,500 (169)	670,000 (75,000)	1,100,000 (124,000)	1,500,000 (169,000)	10.3-19.8 (46-88)	0.03	1.23 (0.56)
ML 3650			3,000 (339)	760,000 (85,000)	1,200,000 (135,000)	1,600,000 (180,000)	9.9-30.3 (44-135)	0.06	1.51 (0.68)

Impact velocity range: 0.1 to 2.0 ft/sec (0.03 to 0.60 m/sec).


ACE Controls recommends that side load not exceed 5°. Maximum side load depends on application. For additional information consult ACE's Applications Department.

See page 57 for ordering information.




Primary Mount





Adjuster (MA and ML only)

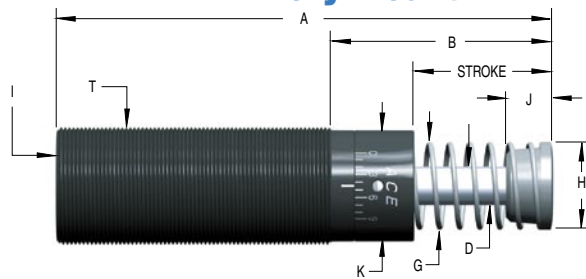

Clevis Mount

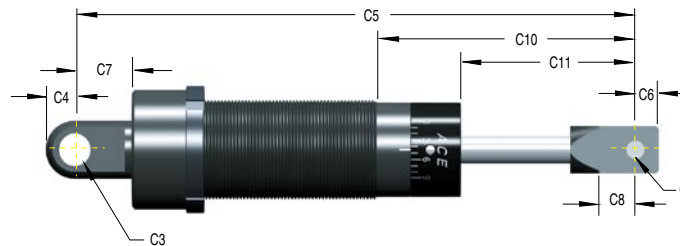

Side-Foot Mount

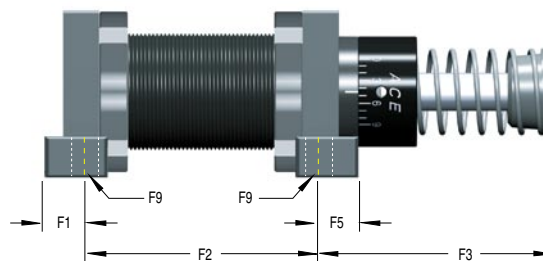

Dimensions 45 Model in inches (millimeters)

Model	Stroke	A	B	D	G	H	I*	J	K	T	W	C1	C2	C3	C4
MC, MA, ML 4525	0.91 (23.1)	5.69 (144.5)	1.97 (50)												
MC, MA, ML 4550	1.91 (48.5)	7.69 (195.3)	2.97 (75.4)	0.50 (12.7)	1.36 (34.5)	1.38 (34.9)	1/8 NPT	0.87 (22.1)	1.65 (41.9)	1-3/4-12 M45x1.5	2.25 (57.20)	0.75 (19.1)	1.00 (25.4)	.5005 (12.7)	0.50 (12.7)
MC, MA 4575	2.91 (73.9)	9.69 (246.1)	3.97 (100.8)												
Model	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	F1	F2	F3	F4	F5
MC, MA, ML 4525	7.85 (199.4)					2.57 (65.3)	1.51 (38.4)					3.50 (88.9)	1.94 (49.3)		
MC, MA, ML 4550	9.85 (250.2)	0.50 (12.7)	1.06 (26.9)	0.69 (17.5)	.3755 (9.6)	3.57 (90.7)	2.51 (63.8)	1.00 (25.4)	1.00 (25.4)	.505 (12.8)	0.50 (12.7)	4.38 (111.8)	3.06 (77.7)	1.16 (29.5)	0.37 (9.5)
MC, MA 4575	11.85 (301)					4.57 (116.1)	3.51 (89.2)					5.38 (136.6)	4.06 (103.1)		
Model	F6	F7	F8	F9											
MC, MA, ML 4525															
MC, MA, ML 4550	3.75 (95.3)	3.00 (76.2)	0.56 (14.2)	0.35 (8.9)											
MC, MA 4575															

*For models MAA and MAS 33 the 1/8-27 male fitting is shipped with the shock. MAA and MAS 45 and 64 have pipe plugs.

Self-Compensating and Adjustable

Specifications MC Series, Self-Compensating

We		E ₃	Energy per Hour in lbs/hour (Nm/hour) E ₄			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
Model	Effective Weight lbs (kg)		Energy per Cycle in lbs (Nm)	Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)			
MC 4525-1	50-200	(23-91)						
MC 4525-2	170-680	(77-300)	3,000	950,000	1,400,000	1,700,000	15.1-22.8	2.5
MC 4525-3	575-2,300	(261-1,043)	(339)	(107,000)	(158,000)	(192,000)	(67-101)	0.03
MC 4525-4	1,950-7,800	(885-3,538)						(1.13)
MC 4550-1	100-400	(45-181)						
MC 4550-2	340-1,360	(154-617)	6,000	1,000,000	1,700,000	2,200,000	15.1-32.2	3.0
MC 4550-3	1,150-4,600	(522-2,087)	(678)	(112,000)	(192,000)	(248,000)	(67-143)	0.08
MC 4550-4	3,900-15,600	(1,769-7,076)						(1.36)
MC 4575-1	150-600	(136-544)						
MC 4575-2	510-2,040	(231-925)	9,000	1,300,000	2,000,000	2,500,000	11.7-40.3	3.5
MC 4575-3	1,730-6,920	(785-3,139)	(1,017)	(146,000)	(225,000)	(282,000)	(52-179)	0.11
MC 4575-4	5,850-23,400	(2,654-10,614)						(1.59)

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications MA Series, Adjustable

MA 4525	95-22,000	(43-9,979)	3,450	950,000	1,400,000	1,700,000	15.1-22.8	0.03	2.5
			(390)	(107,000)	(158,000)	(192,000)	(67-101)		(1.13)
MA 4550	150-32,000	(68-14,515)	6,900	1,000,000	1,700,000	2,200,000	15.1-32.2	0.08	3.0
			(780)	(112,000)	(192,000)	(248,000)	(67-143)		(1.36)
MA 4575	155-33,000	(70-14,968)	10,350	1,300,000	2,000,000	2,500,000	11.7-40.3	0.11	3.5
			(1,169)	(146,000)	(225,000)	(282,000)	(52-179)		(1.59)

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications ML Series, Low Velocity Adjustable

ML 4525			3,450	950,000	1,400,000	1,700,000	15.1-22.8	0.03	2.5
			(390)	(107,000)	(158,000)	(192,000)	(67-98)		(1.13)
ML 4550			6,900	1,000,000	1,700,000	2,200,000	15.1-32.2	0.08	3.0
			(780)	(112,000)	(192,000)	(248,000)	(67-143)		(1.36)

Impact velocity range: 0.06 to 1.5 ft/sec (0.02 to 0.46 m/sec).

Note: A side port can be adapted to Magnum 45 MAA, MAS, MCS, MLA and MLS models and is a special adder item. A side port adapter ring is molded onto the outer tube and increases the overall diameter by 0.5 inches (12.7 mm) in the area of the ring. The side port centerline is located 1.04 inches (26.4 mm) from the front of the outer tube. Add (-P) to the model ordering code if a side port is desired, see page 57.

ACE Controls recommends that side load not exceed 5°. Maximum side load depends on application. For additional information consult ACE's Applications Department.

Lock nut included with each shock absorber. See page 55 for dimensions.


See page 57 for ordering information.

All dimensions and tolerance values listed in this catalog are nominal and subject to change without prior notice.




Primary Mount





Adjuster (MA and ML only)

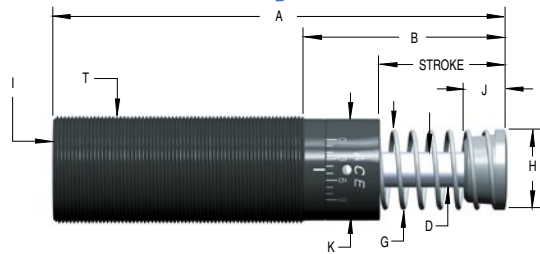

Clevis Mount

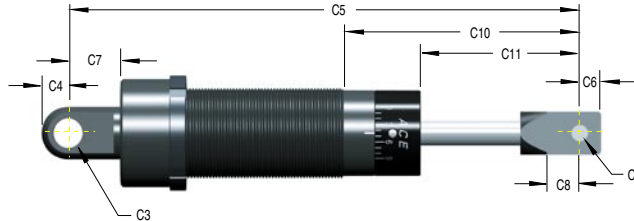

Side-Foot Mount

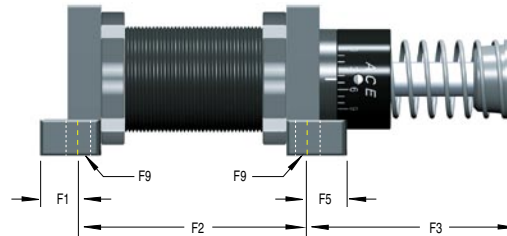

64 Model Dimensions in inches (millimeters)

Model	Stroke	A	B	D	G	H	I*	J	K	T	W	C1	C2	C3	C4
ML 6425	0.91 (23.1)	6.85 (174)	2.35 (59.7)												
MC, MA, ML 6450	1.91 (48.6)	8.85 (224.8)	3.35 (85.1)												
MC, MA 64100	3.91 (99.4)	12.85 (326.4)	5.35 (135.9)	0.75 (19.1)	1.86 (47.2)	1.90 (48.3)	1/4 NPT	1.06 (26.9)	2.37 (60.2)	2-1/2-12 M64x2	3.00 (76.20)	1.25 (31.8)	1.50 (38.1)	.7505 (19.1)	0.75 (19.1)
MC, MA 64150	5.91 (150.1)	17.73 (450.4)	8.23 (209)		2.31 (58.7)	2.38 (60.3)		1.25 (31.8)							
MCA, MAA 64150	5.91 (150.1)	17.60 (447)	8.10 (205.7)		N/A	1.90 (48.3)		1.06 (26.9)			N/A	N/A	N/A	N/A	N/A
Model	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	F1	F2	F3	F4	F5
ML 6425	10.12 (257.1)					3.75 (95.2)	2.31 (58.7)					4.00 (101.6)	2.56 (65.0)		
MC, MA, ML 6450	12.12 (307.9)					4.75 (120.7)	3.31 (84.1)					5.00 (127.0)	3.56 (90.4)		
MC, MA 64100	16.12 (409.5)	0.63 (16.0)	1.29 (32.8)	1.40 (35.6)	.7505 (19.1)	6.75 (171.5)	5.31 (134.9)	1.50 (38.1)	1.25 (31.8)	.625 (15.9)	0.69 (17.5)	7.00 (177.8)	5.56 (141.2)	1.78 (45.2)	0.69 (17.5)
MC, MA 64150	20.87 (530.1)					9.50 (241.3)	8.06 (204.7)					9.00 (228.6)	8.44 (214.4)		
MCA, MAA 64150	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A			8.31 (211.1)		
Model	F6	F7	F8	F9											
ML 6425															
MC, MA, ML 6450															
MC, MA 64100	5.62 (142.8)	4.88 (124.0)	0.75 (19.1)	0.42 (10.7)											
MC, MA 64150															
MCA, MAA 64150															

Self-Compensating and Adjustable

Specifications MC Series, Self-Compensating

Model	We		E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
	Effective Weight lbs (kg)			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)	External Accumulator (Re-circulating)			
MC 6450-1	300-1,200	(136-544)							
MC 6450-2	1,020-4,080	(463-1,851)	15,000	1,300,000	2,600,000	3,400,000	20.1-34.9	0.12	6.4
MC 6450-3	3,460-13,840	(1,569-6,278)	(1,695)	(146,000)	(293,000)	(384,000)	(89-155)		(2.90)
MC 6450-4	11,700-46,800	(5,307-21,228)							
MC 64100-1	600-2,400	(272-1,089)							
MC 64100-2	2,040-8,160	(925-3,701)	30,000	1,700,000	3,400,000	4,400,000	23.5-61	0.34	8.15
MC 64100-3	6,920-27,680	(3,139-12,556)	(3,390)	(192,000)	(384,000)	(497,000)	(104-271)		(3.70)
MC 64100-4	23,400-93,600	(10,614-42,457)							
MC 64150-1	900-3,600	(408-1,633)							
MC 64150-2	3,060-12,240	(1,388-5,552)	45,000	2,200,000	4,400,000	5,700,000	16.9-82.2	0.48	11.25
MC 64150-3	10,380-41,520	(4,708-18,833)	(5,084)	(248,000)	(497,000)	(644,000)	(75-366)		(5.10)
MC 64150-4	35,100-140,400	(15,921-63,685)							

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications MA Series, Adjustable

MA 6450	480-110,000	(218-49,895)	18,000 (2,034)	1,300,000 (146,000)	2,600,000 (293,000)	3,400,000 (384,000)	20.1-34.9 (89-155)	0.12	6.4 (2.90)
MA 64100	600-115,000	(272-52,163)	36,000 (4,067)	1,700,000 (192,000)	3,400,000 (384,000)	4,400,000 (497,000)	23.5-61 (104-271)	0.34	8.15 (3.70)
MA 64150	730-175,000	(331-79,379)	54,000 (6,101)	2,200,000 (248,000)	4,400,000 (497,000)	5,700,000 (644,000)	16.9-82.2 (75-366)	0.48	11.25 (5.10)

Impact velocity range: 0.5 to 16.5 ft/sec (0.15 to 5 m/sec).

Specifications ML Series, Low Velocity Adjustable

ML 6425			9,000 (1,017)	1,100,000 (124,000)	2,200,000 (248,000)	2,900,000 (328,000)	26.7-34.9 (119-155)	0.06	5.5 (2.49)
ML 6450			18,000 (2,034)	1,300,000 (146,000)	2,600,000 (293,000)	3,400,000 (384,000)	20.1-34.9 (89-155)	0.12	6.4 (2.90)

Impact velocity range: 0.06 to 1.5 ft/sec (0.02 to 0.46 m/sec).

*For models MAA and MAS 33 the 1/8-27 male fitting is shipped with the shock. MAA and MAS 45 and 64 have pipe plugs.

Note: A side port can be adapted to Magnum 64 MAA, MAS, MCA, MCS, MLA and MLS models and is special adder item. A side port adapter ring is molded onto the outer tube and increases the overall diameter by 0.5 inches (12.7 mm) in the area of the ring. The side port centerline is located 1.47 inches (37.3 mm) from the front of the outer tube. Add (-P) to the model ordering code if the side port is desired, see page 57.

Note: MA and MC 64150 models include an integral, non-removable stop block, not a stop collar. Adjustable models can be adjusted from the front or rear.

Note: MAA and MCA 64150 models include a stop collar, 0.75 inches (19 mm) longer than the standard 64 model stop collar.

ACE Controls recommends that side load not exceed 5°. Maximum side load depends on application. For additional information consult ACE's Applications Department.


Lock nut included with each shock absorber. See page 55 for dimensions.

See page 57 for ordering information.


Square and Rectangular Flanges in inches (millimeters)

Used With	Square Flange	Rect Flange	T	M1	M2	M3	M4	M5	M6
MA 33 ML 33 MC 33	N/A	250-0016	1-1/4-12 UNF	1.50 (38.1)	2.00 (50.8)	0.38 (9.5)	.219 (5.6)	1.12 (28.4)	1.62 (41.2)
MA 33M ML 33M MC 33M		250-0293	M33x1.5	1.62 (41.1)	2.12 (53.8)	0.38 (9.5)	.278 (7.1)	1.10 (28.0)	1.65 (42.0)
MA 36 ML 36 MC 36	N/A	250-0633	1-3/8-12 UNF	1.75 (44.4)	2.00 (50.8)	0.38 (9.5)	.219 (5.6)	1.12 (28.4)	1.62 (41.2)
MA 36M ML 36M MC 36M		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
MA 45 ML 45 MC 45	250-0023	250-0024	1-3/4-12 UN	2.25 (57.2)	3.00 (76.2)	0.50 (12.7)	0.34 (8.7)	1.62 (41.2)	2.38 (60.5)
MA 45M ML 45M MC 45M	250-0298	250-0299	M45x1.5	2.25 (57.2)	3.00 (76.2)	0.50 (12.7)	0.35 (8.8)	1.62 (41.2)	2.38 (60.5)
MA 64 ML 64 MC 64	250-0028	N/A	2-1/2-12 UN	3.50 (88.9)	N/A	0.62 (15.9)	0.41 (10.4)	2.75 (69.6)	N/A
MA 64M ML 64M MC 64M	250-0302	N/A	M64x2	3.50 (88.9)	N/A	0.62 (15.9)	0.41 (10.4)	2.75 (69.6)	N/A

Square Flange





Rectangular Flange



Stop Bars in inches (millimeters)

Used With	Part #	S10	S11	S12	S13	S14	S15	S16
MA 33 ML 33 MC 33	250-0426	1.28 (32.5)	1.50 (38.1)	0.38 (9.7)	0.19 (4.8)	1.12 (28.4)	10-32 UNF	N/A
MA 33M ML 33M MC 33M	250-0427	1.28 (32.5)	1.50 (38.1)	0.38 (9.7)	0.19 (4.8)	1.10 (28.0)	M5x0.8	N/A
MA 36 ML 36 MC 36	250-0426	1.28 (32.5)	1.50 (38.1)	0.38 (9.7)	0.19 (4.8)	1.12 (28.4)	10-32 UNF	N/A
MA 36M ML 36M MC 36M	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
MA 45 ML 45 MC 45	250-0428	1.03 (26.2)	2.25 (57.2)	0.63 (16.0)	0.31 (7.9)	1.62 (41.3)	5/16-24 UNF	N/A
MA 45M ML 45M MC 45M	250-0639	1.03 (26.2)	2.25 (57.2)	0.63 (16.0)	0.31 (7.9)	1.62 (41.3)	M8x1.25	N/A
MA 6450 MA 64100 ML 6425 ML 6450 MC 6450 MC 64100	250-0430	1.44 (36.5)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	3/8-24 UNF	1.37 (34.8)
MA 6450M MA 64100M ML 6425M ML 6450M MC 6450M MC 64100M	250-0640	1.44 (36.5)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	M10x1.5	1.37 (34.8)
MA 64150 MC 64150	250-0432	2.31 (57.7)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	3/8-24 UNF	1.37 (34.8)
MA 64150M MC 64150M	250-0641	2.31 (57.7)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	M10x1.5	1.37 (34.8)
MAA 64150 MCA 64150	250-0435	2.18 (55.4)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	3/8-24 UNF	1.37 (34.8)
MAA 64150M MCA 64150M	250-0649	2.18 (55.4)	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	2.75 (69.8)	M10x1.5	1.37 (34.8)

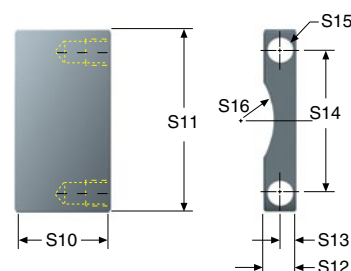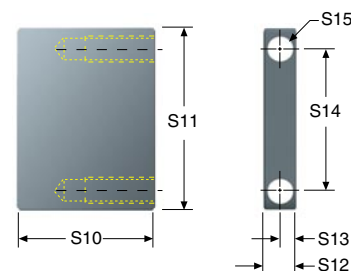


Hard metric stop bars available upon request.

Stop bars come in pairs, two bars per package.

Flanged Stop Collars in inches (millimeters)


Used With	Part #	T	S1	S2	S3	S4	S5	S6	S7
MA 33 ML 33 MC 33	250-0070	1-1/4-12 UNF	2.00 (50.8)	1.50 (38.1)	2.50 (63.5)	2.00 (50.8)	0.88 (22.4)	0.25 (6.4)	0.282 (7.16)
MA 33M ML 33M MC 33M	250-0071	M33x1.5	2.00 (50.8)	1.50 (38.1)	2.50 (63.5)	2.00 (50.8)	0.88 (22.4)	0.25 (6.4)	0.282 (7.16)
MA 36 ML 36 MC 36	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
MA 36M ML 36M MC 36M									
MA 45 ML 45 MC 45	250-0072	1-3/4-12 UN	1.85 (47.0)	2.25 (57.2)	3.25 (82.6)	2.75 (69.9)	0.88 (22.4)	0.25 (6.4)	0.282 (7.16)
MA 45M ML 45M MC 45M	250-0073	M45x1.5	1.85 (47.0)	2.25 (57.2)	3.25 (82.6)	2.75 (69.9)	0.88 (22.4)	0.25 (6.4)	0.282 (7.16)
MA 6450 MA 64100 ML 6425 ML 6450 MC 6450 MC 64100	250-0074	2-1/2-12 UN	2.25 (57.2)	3.00 (76.2)	4.25 (108.0)	3.50 (88.9)	1.00 (25.4)	0.38 (9.7)	0.282 (7.16)
MA 6450M MA 64100M ML 6425M ML 6450M MC 6450M MC 64100M	250-0075	M64x2	2.25 (57.2)	3.00 (76.2)	4.25 (108.0)	3.50 (88.9)	1.00 (25.4)	0.38 (9.7)	0.282 (7.16)
MA 64150 MC 64150	250-0076	2-1/2-12 UN	3.13 (79.4)	3.00 (76.2)	4.25 (108.0)	3.50 (88.9)	1.00 (25.4)	0.38 (9.7)	0.282 (7.16)
MA 64150M MC 64150M	250-0077	M64x2	3.13 (79.4)	3.00 (76.2)	4.25 (108.0)	3.50 (88.9)	1.00 (25.4)	0.38 (9.7)	0.282 (7.16)

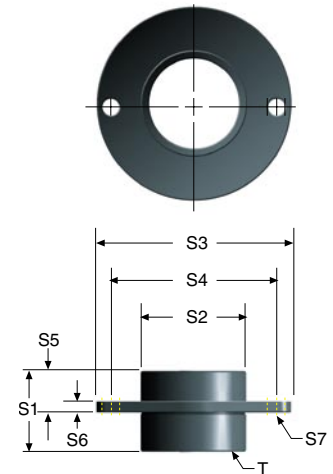


55

Lock Nuts in inches (millimeters)

Used With	Part #	T	W	N3
MA 33 ML 33 MC 33	250-0038	1-1/4-12 UN	1.50 (38.1)	0.25 (6.4)
MA 33M ML 33M MC 33M	250-0292	M33x1.5	1.56 (39.6)	0.25 (6.4)
MA 36 ML 36 MC 36	250-0631	1-3/8-12 UNF	1.75 (44.5)	0.25 (6.4)
MA 36M ML 36M MC 36M	250-0537	M36x1.5	1.75 (44.5)	0.25 (6.4)
MA 45 ML 45 MC 45	250-0041	1-3/4-12 UN	2.25 (57.2)	0.37 (9.4)
MA 45M ML 45M MC 45M	250-0297	M45x1.5	2.25 (57.2)	0.37 (9.4)
MA 64 ML 64 MC 64	250-0042	2-1/2-12 UN	3.00 (76.2)	0.37 (9.4)
MA 64M ML 64M MC 64M	250-0301	M64x2	3.00 (76.2)	0.37 (9.4)

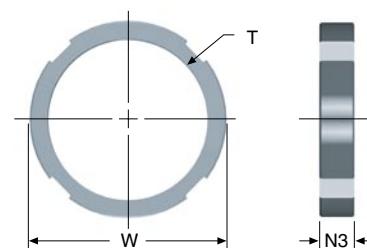

One lock nut included with each shock absorber where appropriate.

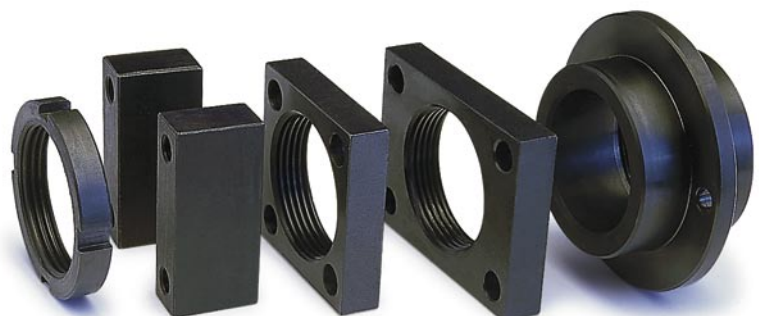

Side-Foot Mount Assembly



Used With	Part #	Used With	Part #
MA 33	250-0015	MA 6450	250-0030
ML 33		MA 64100	
MC 33		ML 6425	
MA 33M	250-0294	ML 6450	
ML 33M		MC 6450	
MC 33M		MC 64100	
MA 36	N/A	MA 6450M	250-0304
ML 36		MA 64100M	
MC 36		ML 6425M	
MA 36M	N/A	ML 6450M	
ML 36M		MC 6450M	
MC 36M		MC 64100M	
MA 45	250-0025	MA 64150	250-0030
ML 45		MC 64150	
MC 45		MA 64150M	250-0304
MA 45M	250-0300	MC 64150M	
ML 45M			
MC 45M			

See pages 48, 50 and 52 for Magnum Group side-foot mount drawings and dimensions.

56

Clevis Mount Assembly




Used With	Part #	Used With	Part #
MA 33	250-0225	ML 6425	250-0625
ML 33		ML 6425M	250-0626
MC 33		MA 6450	250-0625
MAS 33		ML 6450	
MLS 33		MC 6450	
MCS 33	250-0323	MCS 6450	250-0626
MA 33M		MA 6450M	
ML 33M		ML 6450M	
MC 33M		MC 6450M	
MAS 33M		MCS 6450M	
MLS 33M	250-0322	MA 64100	250-0625
MCS 33M		MC 64100	
MAN 33		MCS 64100	250-0626
MLN 33	250-0018	MA 64100M	
MCN 33		MC 64100M	
MAA 33		MCS 64100M	
MLA 33		MAN 64150	250-0625
MCA 33		MCN 64150	
MAN 33M	250-0322	MAA 64150	
MLN 33M		MCA 64150	250-0626
MCN 33M		MAN 64150M	
MAA 33M		MCN 64150M	
MLA 33M		MAA 64150M	
MCA 33M		MCA 64150M	
MA 45	250-0324	MA 64150	250-0627
ML 45		MCA 64150	
MC 45		MAS 64150	
MCS 45		MCS 64150	
MA 45M	250-0325	MA 64150M	250-0628
ML 45M		MCA 64150M	
MC 45M		MAS 64150M	
MCS 45M		MCS 64150M	

See pages 48, 50 and 52 for Magnum Group clevis mount drawings and dimensions.

MAA, MAS, MCA, MCS, MLA and MLS models require a side port (-P).


MC Series, Self-Compensating

MC 3325 - 1 C

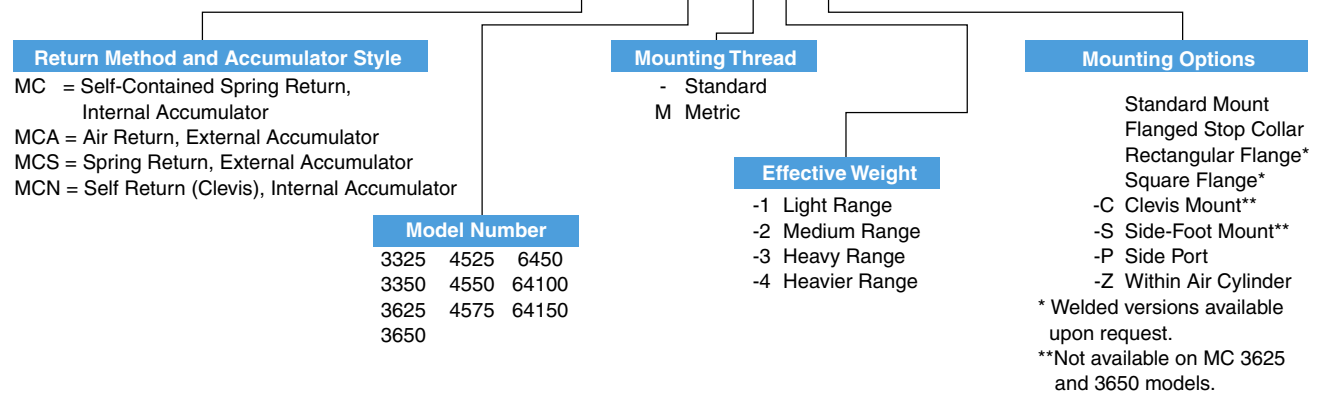


MA Series, Adjustable

MA 3325 - C

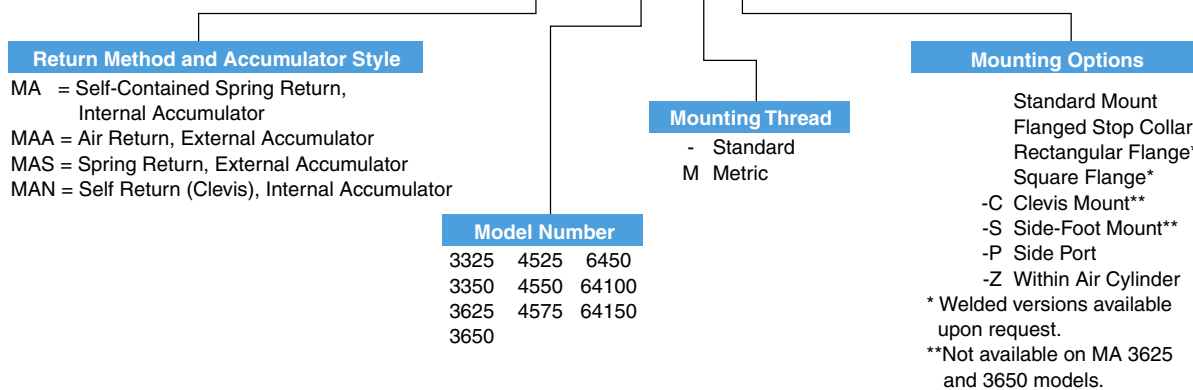

ML Series, Low Velocity Adjustable

ML 3325 - C

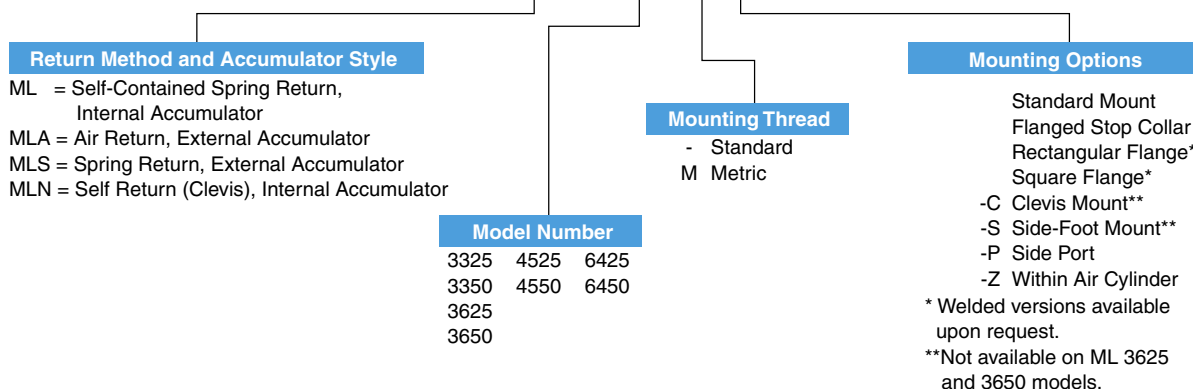

Poly pad available on 33 models only...part no. 250-0011.

Flanges and flanged stop collars are packaged separately from shock absorbers.

Z-mounted MC, MA & ML Magnum models do not include a stop collar.

1-1/2" Bore Series

Adjustable

ACE 1-1/2" bore series shock absorbers are designed for the toughest environments. These durable adjustable models provide outstanding deceleration over a wide range of effective weight conditions. Large energy capacities stop heavy loads set into motion by high propelling forces, without damage.

Applications include: Automotive manufacturing and production equipment, large robotics, heavy conveyors, foundries and steel industry equipment.

Technical Data

Impact velocity range: 0.5 to 15 ft/sec (0.15 to 4.5 m/sec)

Operating temperature: 10° to 150° F (-12° to 66° C)

Mechanical stop: Must be provided .09 inch (2.3 mm) before end of stroke.

Oil type: American 46

Materials: Steel body with black oxide finish. Piston rod high tensile steel, hardened and chrome plated. Return spring zinc plated.

Adjustment: After installation of the ACE shock absorber, cycle the machine a number of times. Turn the adjustment ring against the scale marked 0 to 9, until optimum deceleration is achieved (i.e. smooth deceleration throughout the stroke).

Hard impact at the start of stroke-turn adjuster toward 9.

Hard set-down at the end of stroke-turn adjuster toward 0.

Poly pad: Optional

Specifications

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄		Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O) Tank			
1-1/2 x 2	430 - 70,000 (195 - 31,750)	21,000 (2,373)	3,200,000 (361,550)	4,000,000 (451,900)	34.9 - 47.6 (155 - 210)	.10	16.4 (7.44)
1-1/2 x 3-1/2	480 - 80,000 (218 - 36,280)	36,750 (4,152)	5,600,000 (632,700)	7,000,000 (790,890)	25.4 - 47.6 (113 - 210)	.25	19.4 (8.80)
1-1/2 x 5	500 - 90,000 (227 - 40,800)	52,500 (5,932)	8,000,000 (903,870)	10,000,000 (1,129,840)	20.7 - 52.5 (92 - 230)	.40	22.7 (10.30)
1-1/2 x 6-1/2	680 - 100,000 (308 - 45,350)	68,250 (7,711)	10,400,000 (1,175,000)	13,000,000 (1,468,800)	20.7 - 97.4 (92 - 430)	.40	25.0 (11.34)

Ordering Information

A 1-1/2 x 6-1/2 - F

Return Method and Accumulator Style

A = Spring Return, Internal Accumulator
AA = Air Return, External Accumulator
SA = Spring Return, External Accumulator
NA = Self (Cleviss) Return, Internal Accumulator

Bore Size

1-1/2

Stroke Length

2
3-1/2
5
6-1/2

Mounting Style



-F Front Flange
-R Rear Flange
-RF Front Rectangular Flange
-RR Rear Rectangular Flange
-S Side Foot Mount
-C Cleviss Mount

Note: All body mounting hardware welded in place.


1-1/2" Bore Series

Adjustable



Rear Flange

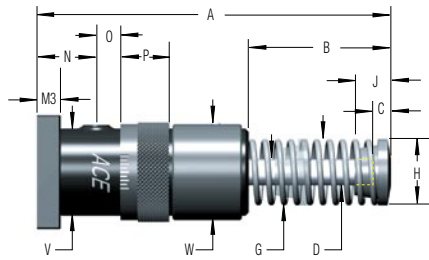


Front Flange

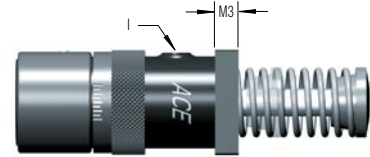

Side-Foot Mount


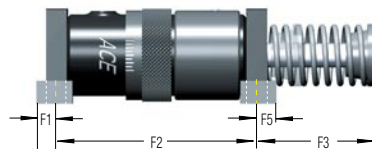



Poly Pad



Part No. 250-0003

Clevis Mount

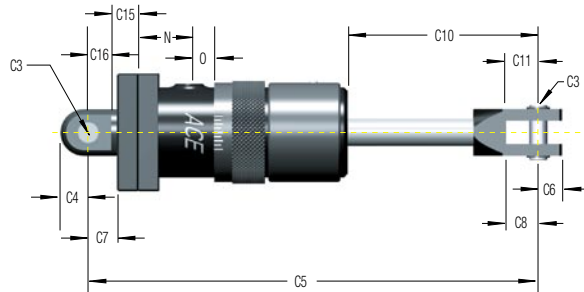

1-1/2" Bore Series Dimensions in inches (millimeters)

Size	Stroke	A	B	C	D	G	H	I	J	N	O	P	V	W	C1	C2	C3	C4	C5	C6	C7
1-1/2 x 2	2.00 (50.8)	9.69 (246.1)	4.13 (104.8)							1.38 (35.0)	0.28 (7.1)								12.94 (328.6)		
1-1/2 x 3-1/2	3.50 (88.9)	12.69 (322.3)	5.63 (142.9)	0.81 (20.6)	1.00 (25.4)	2.69 (68.3)	2.75 (69.9)	1/2 (12.7)	1.38 (35.1)	2.00 (50.8)	0.28 (7.1)	1.25 (31.8)	3.00 (76.2)	4.00 (101.6)	1.25 (31.8)	1.50 (38.1)	0.75 (19.1)	0.75 (19.1)	405.6 (10.4)	0.63 (16.0)	1.25 (31.8)
1-1/2 x 5	5.00 (127.0)	15.69 (398.5)	7.13 (181.0)					NPT	2.00 (50.8)	1.03 (26.2)									18.97 (481.8)		
1-1/2 x 6-1/2	6.50 (165.1)	19.44 (493.7)	9.38 (238.1)						2.00 (50.8)	1.78 (45.2)									22.72 (577.1)		

Size	C8	C10	C11	C12	C13	C14	C15	C16	F1	F2	F3	F4	F5	F6	F7	F8	F9	M1	M2	M3	M4	M5	M6
1-1/2 x 2		5.41 (137.3)								**5.18 (131.6)	**4.31 (109.5)												
1-1/2 x 3-1/2		6.91 (175.4)								6.69 (169.9)	5.81 (147.6)												
1-1/2 x 5		1.41 (35.7)	1.40 (35.6)	1.50 (38.1)	1.25 (31.8)	5/8	0.94 (23.9)	1.06 (27.0)	0.63 (15.9)	8.19 (208.0)	7.31 (185.7)	2.00 (50.8)	0.63 (16.0)	6.50 (165.1)	5.50 (139.7)	0.75 (19.1)	2.03 (51.6)	4.00 (101.6)	4.00 (101.6)	0.75 (19.0)	0.53 (13.5)	3.00 (76.2)	3.00 (76.2)
1-1/2 x 6-1/2		10.66 (270.7)								9.69 (246.1)	9.56 (242.8)							5.00 (127.0)				4.00 (101.6)	

*Rectangular flange dimension

**Note: 1-1/2 x 2 shock absorbers available with side-foot mount in AA and SA models only.

Self-Compensating

ACE's durable CA 2, CA 3 and 4" Bore Series of self-compensating shock absorbers are designed for extremely heavy duty applications and provide smooth deceleration under changing conditions. High energy capacities combined with wide effective weight ranges qualify these units to perform in the most demanding environments.

The new CA 2 offers up to 170% of the energy per cycle capacity of former models. The rugged new CA 3 offers up to 125% of the energy capacity of former models. You can select the correct model for your application by utilizing the ACESIZE sizing program or the capacity charts. Replacing existing shock absorbers with the new CA Series is easy. Simply provide us the type and adjustment setting of your existing units and we will do the rest. These dependable units are available self-contained or for use with an external air/oil tank.

Applications include: foundry, steel, marine, lumber and other heavy equipment industries.

Technical Data

Impact velocity range: 1 to 16.5 ft/sec (0.30 to 5 m/sec)

Operating temperature: 10° to 150° F (-12° to 66° C)

Mechanical stop:

2", 3" bore: Must be provided .09 inch (2.3 mm) before end of stroke.

4" bore: Must be provided 0.09 inch (2.3 mm) before end of stroke.

Oil type: ATF

Materials: Steel body with black oxide finish. Piston rod high tensile steel, hardened and chrome plated. Return spring zinc plated.




60

Heavy Industrial Shock Absorbers **CA 2 to CA 4**

Self-Compensating

Illustration depicts CA 2 and CA 3 design only.

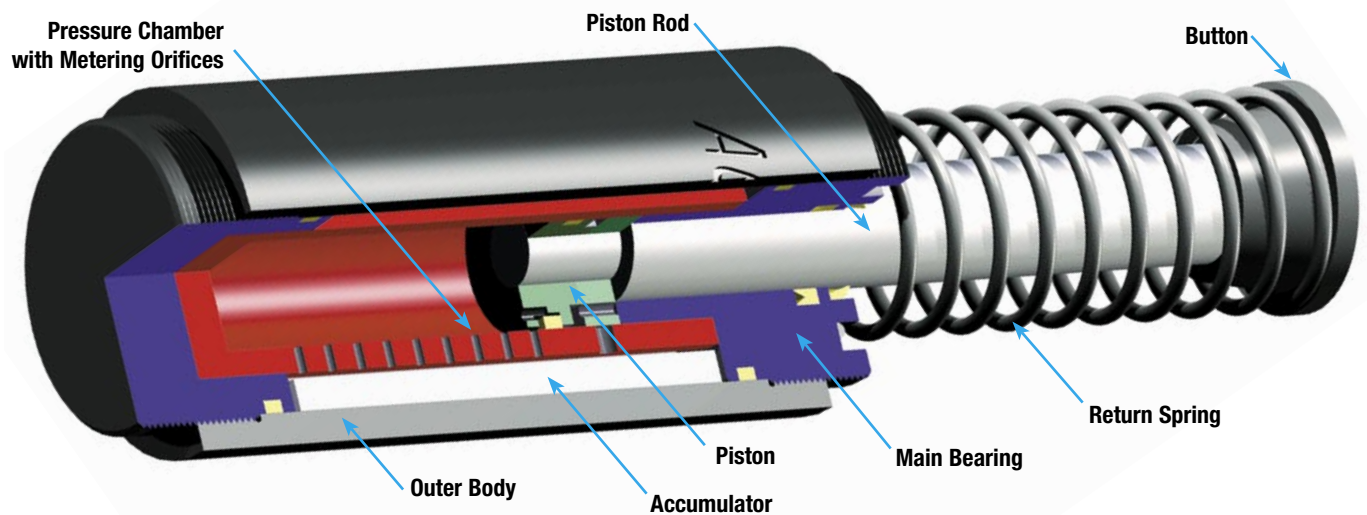

Adjustable

ACE's rugged A2 and A3 Series adjustable shock absorbers are capable of decelerating heavy duty loads. These reliable units replace the former 2" and 3" large bore adjustable shock absorbers.

Energy capacity ratings are 228% of former models. In addition, effective weight ranges have increased dramatically, resulting in the capability of handling a wider range of applications and increases in velocity. The units are easily adjusted by means of a 5/16 inch (8 mm) hex socket adjuster located at the bottom of the outer body. These dependable shock absorbers are maintenance free and are available self-contained or for use with an external air/oil tank.

Features include a considerably reduced outer diameter, internal accumulator and threaded mounting brackets, easily adaptable to the front or rear of the outer body.

Applications include: foundry, steel, marine, lumber, and other heavy equipment industries.

Technical Data

Impact velocity range: 0.33 to 16.5 ft/sec (0.1 to 5 m/sec)

Operating temperature: 10° to 150° F (-12° to 66° C)

Mechanical stop: Must be provided .09 inch (2.3 mm) before end of stroke.

Oil type: ATF

Materials: Steel body with black oxide finish. Piston rod high tensile steel, hardened and chrome plated. Return spring zinc plated. To avoid reducing heat dissipation, do not paint.

Adjustment: After installation of the ACE shock absorber, cycle the machine a number of times. Turn the hex socket adjuster against the scale marked 0 to 9, until optimum deceleration is achieved (i.e. smooth deceleration throughout the stroke).

Hard impact at the start of stroke-turn adjuster toward 9.


Hard set-down at the end of stroke-turn adjuster toward 0.



61



Heavy Industrial Shock Absorbers A 2 and A 3

Adjustable

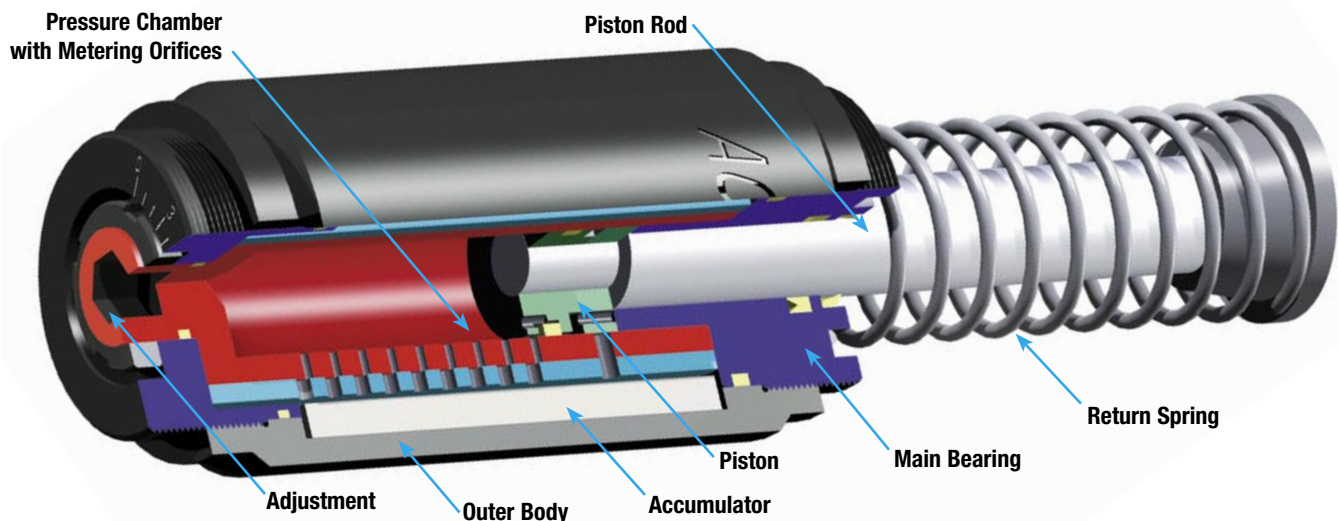


(CA) Self-Compensating and (A) Adjustable



Rear Flange

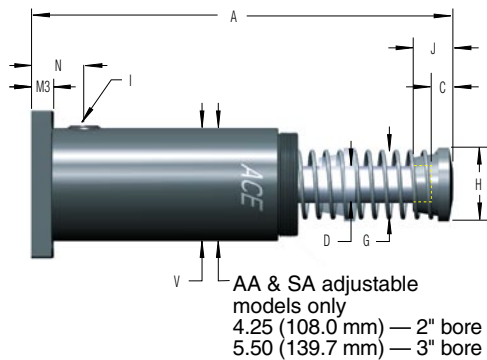


Front Flange

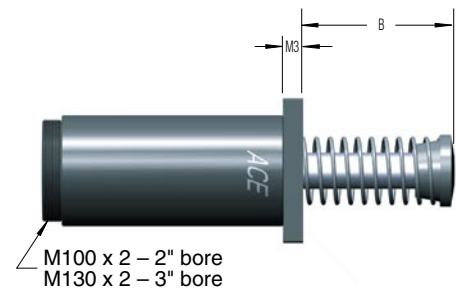



2" Bore Foot Mount

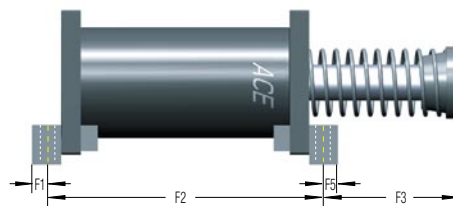


Rectangular Flange

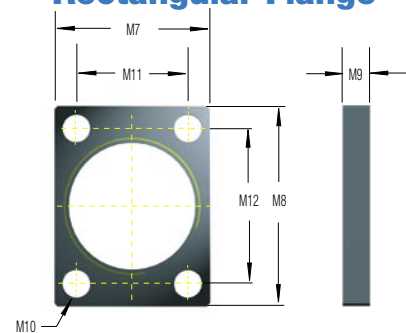




3" Bore Foot Mount

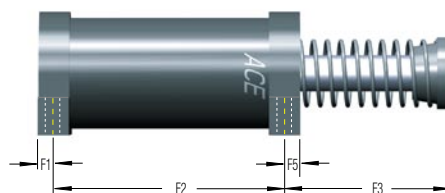

(A) Adjustable 2" & 3" Bore Models

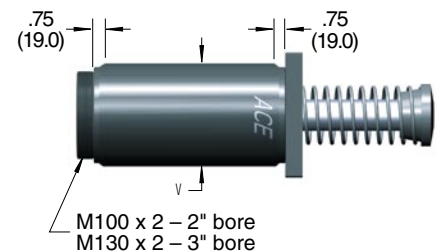

Clevis Mount

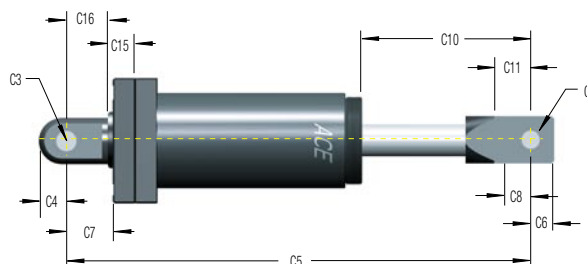

(CA) Self-Compensating and (A) Adjustable

Self-Compensating and Adjustable Models Dimensions in inches (millimeters)

Size	Stroke	A	B	C	D	G	H	I	J	N	V	C1	C2	C3	C4	C5	C6	C7	C8	C10	C11
CA 2x2	2.00	12.37	4.31	0.82		3.06	2.75		1.38							17.00				6.05	2.06
A 2x2	(50.8)	(312.7)	(109.5)	(20.8)		(77.7)	(69.9)		(35.1)							(431.8)				(153.7)	(52.3)
CA 2x4	4.00	16.37	6.31	0.82		3.06	2.75		1.38		CA					21.00				8.05	2.06
A 2x4	(101.6)	(414.0)	(160.3)	(20.8)		(77.7)	(69.9)		(35.1)		4.25					(533.4)				(204.4)	(52.3)
CA 2x6	6.00	20.37	8.31	0.82	1.38	3.63	2.75	3/4	1.38	3.50	(108.0)	1.50	2.25	1.005	1.00	25.00	1.00	2.00	1.50	10.05	2.06
A 2x6	(152.4)	(515.9)	(211.1)	(20.8)	(35.1)	(92.2)	(69.9)	NPT	(35.1)	(88.9)		(38.1)	(57.2)	(25.5)	(25.4)	(635)	(25.4)	(50.8)	(38.1)	(255.2)	(52.3)
CA 2x8	8.00	25.37	11.31	1.82		4.00	3.63		2.38		A*					29.00				12.05	0.75
A 2x8	(203.2)	(642.9)	(287.3)	(46.2)		(101.6)	(92.2)		(60.5)		4.63					(736.6)				(306.1)	(19)
CA 2x10	10.00	29.37	13.31	1.82		4.50	4.25		2.38		(118.0)					33.00				14.05	1.06
A 2x10	(254)	(744.5)	(338.1)	(46.2)		(114.3)	(108.0)		(60.5)							(838.2)				(356.9)	(26.9)
CA 3x5	5.00	19.25	8.25			4.75					CA					23.00				9.05	
A 3x5	(127)	(489.0)	(209.6)			(120.7)					5.50					(584.2)				(229.9)	
CA 3x8	8.00	25.25	11.25	2.00	1.75	4.75	4.38	3/4	2.75	3.13	(139.7)	1.50	2.25	1.01	1.00	29.00	1.00	2.00	1.50	12.05	1.12
A 3x8	(203.2)	(641.4)	(285.8)	(50.8)	(44.5)	(120.7)	(111.3)	NPT	(69.9)	(79.5)		(38.1)	(57.2)	(25.5)	(25.4)	(736.6)	(25.4)	(50.8)	(38.1)	(306.1)	(28.4)
CA 3x12	12.00	35.03	17.03			4.84					6.00					38.78				17.83	
A 3x12	(304.8)	(889.8)	(432.6)			(122.9)					(152.4)					(985)				(452.9)	

Size	Stroke	C12	C13	C14	C15	C16	F1	F2	F3	F4	F5	F6	F7	F8	F9	M1	M2	M3	M4	M5	M6
CA 2x2	2.00							9.5	3.44												
A 2x2	(50.8)							(241.3)	(87.4)												
CA 2x4	4.00							11.5	5.44												
A 2x4	(101.6)							(292.1)	(138.2)												
CA 2x6	6.00	3.5	2.00	1.50	1.25	1.75	0.63	13.5	7.44	3.13	0.63	8.00	6.50	1.50	2.75	5.50	5.50	0.75	0.66	4.38	4.38
A 2x6	(152.4)	(88.9)	(50.8)	(38.1)	(31.8)	(44.5)	(16.0)	(342.9)	(189.0)	(79.5)	(16.0)	(203.2)	(165.1)	(38.1)	(69.9)	(139.7)	(139.7)	(19.1)	(16.8)	(111.3)	(111.3)
CA 2x8	8.00							15.5	10.44												
A 2x8	(203.2)							(393.7)	(265.2)												
CA 2x10	10.00							17.5	12.44												
A 2x10	(254)							(444.5)	(316.0)												
CA 3x5	5.00							10.25	8.50												
A 3x5	(127)							(260.4)	(215.9)												
CA 3x8	8.00	3.5	2.00	1.50	1.25	1.75	1.00	13.25	11.50	3.15	1.00	10.00	8.50	1.73	3.15	6.00	6.50	1.00	0.66	4.88	5.38
A 3x8	(203.2)	(88.9)	(50.8)	(38.1)	(31.8)	(44.5)	(25.4)	(336.6)	(292.1)	(80.0)	(25.4)	(254.0)	(215.9)	(43.9)	(80.0)	(152.4)	(165.1)	(25.4)	(16.8)	(124.0)	(136.7)
CA 3x12	12.00							17.25	17.28												
A 3x12	(304.8)							(438.2)	(438.9)												

Size		M7	M8	M9	M10	M11	M12
CA 3	Rectangular	6.50	8.00	1.00	0.78	4.50	6.50
A 3	Flange	(165.1)	(203.2)	(25.4)	(19.8)	(114.3)	(165.1)

* See rear flange illustration on page 62 for AA and SA model dimensions.

Specifications Self-Compensating Models

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour)			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)	A/O Tank (Re-circulating)			
CA 2 x 2-1	1,600-4,800	(726-2,177)						
CA 2 x 2-2	4,000-12,000	(1,814-5,443)						
CA 2 x 2-3	10,000-30,000	(4,536-13,608)	32,000	9,600,000	12,000,000	15,600,00	48-63	28.2
CA 2 x 2-4	25,000-75,000	(11,340-34,019)	(3,616)	(1,084,650)	(1,355,820)	(1,762,564)	(214-280)	0.25
CA 2 x 4-1	3,200-9,600	(1,452-4,354)						
CA 2 x 4-2	8,000-24,000	(3,629-10,886)						
CA 2 x 4-3	20,000-60,000	(9,072-27,216)	64,000	12,000,000	15,000,000	19,500,00	34-63	32.6
CA 2 x 4-4	50,000-150,000	(22,680-68,039)	(7,231)	(1,355,820)	(1,694,770)	(2,203,200)	(151-280)	0.50
CA 2 x 6-1	4,800-14,400	(2,117-6,532)						
CA 2 x 6-2	12,000-36,000	(5,443-16,329)						
CA 2 x 6-3	30,000-90,000	(13,608-40,823)	96,000	14,400,000	18,000,000	23,500,000	34-90	37.2
CA 2 x 6-4	75,000-225,000	(34,019-102,058)	(10,847)	(1,626,980)	(2,033,730)	(2,655,140)	(151-400)	0.60

All dimensions and tolerance values listed in this catalog are nominal and subject to change without prior notice.

(CA) Self-Compensating and (A) Adjustable

Specifications Continued Self-Compensating Models

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)	A/O Tank (Re-circulating)			
CA 2 x 8-1	6,400-19,200 (2,903-8,709)	128,000 (14,462)	16,800,000 (1,898,150)	21,000,000 (2,372,680)	27,000,000 (3,050,590)	51-144 (227-641)	0.70	42.6 (19.32)
CA 2 x 8-2	16,000-48,000 (7,257-21,772)							
CA 2 x 8-3	40,000-120,000 (18,144-54,431)							
CA 2 x 8-4	100,000-300,000 (45,359-136,708)	160,000 (18,078)	19,200,000 (2,169,310)	24,000,000 (2,711,640)	31,000,000 (3,502,530)	35-101 (156-449)	0.80	50.2 (22.77)
CA 2 x 10-1	8,000-24,000 (3,629-10,886)							
CA 2 x 10-2	20,000-60,000 (9,072-27,216)							
CA 2 x 10-3	50,000-150,000 (22,680-68,039)	125,000 (14,123)	20,000,000 (2,259,700)	25,000,000 (2,824,620)	32,500,000 (3,672,010)	59-156 (262-694)	0.60	63.8 (28.94)
CA 2 x 10-4	125,000-375,000 (56,700-170,097)							
CA 3 x 5-1	6,400-19,200 (2,903-8,709)							
CA 3 x 5-2	16,000-48,000 (7,257-21,772)	200,000 (22,597)	32,000,000 (3,615,520)	40,000,000 (4,519,390)	52,000,000 (5,875,210)	62-162 (275-721)	0.80	73.6 (33.38)
CA 3 x 5-3	40,000-120,000 (18,144-54,431)							
CA 3 x 5-4	100,000-300,000 (45,359-136,708)							
CA 3 x 8-1	10,240-30,720 (4,645-13,934)	300,000 (33,896)	48,000,000 (5,423,270)	60,000,000 (6,779,090)	78,000,000 (8,812,820)	60-160 (267-712)	1.20	89.4 (40.55)
CA 3 x 8-2	25,600-76,800 (11,612-34,836)							
CA 3 x 8-3	64,000-192,000 (29,030-87,090)							
CA 3 x 8-4	160,000-480,000 (72,575-217,724)	300,000 (33,896)	48,000,000 (5,423,270)	60,000,000 (6,779,090)	78,000,000 (8,812,820)	60-160 (267-712)	1.20	89.4 (40.55)
CA 3 x 12-1	15,360-46,080 (6,967-20,902)							
CA 3 x 12-2	38,400-115,200 (17,418-52,254)							
CA 3 x 12-3	96,000-288,000 (43,545-130,635)	300,000 (33,896)	48,000,000 (5,423,270)	60,000,000 (6,779,090)	78,000,000 (8,812,820)	60-160 (267-712)	1.20	89.4 (40.55)
CA 3 x 12-4	240,000-720,000 (108,862-326,587)							

Specifications Adjustable Models

Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄			Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)	A/O Tank (Re-circulating)			
A 2 x 2	560-170,000 (254-77,111)	32,000 (3,616)	9,600,000 (1,084,650)	12,000,000 (1,355,820)	15,600,000 (1,762,564)	48-63 (214-280)	0.25	31.5 (14.29)
A 2 x 4	510-160,000 (231-72,576)	80,000 (9,039)	12,000,000 (1,355,820)	15,000,000 (1,694,770)	19,500,000 (2,203,200)	34-63 (151-280)	0.50	36.9 (16.74)
A 2 x 6	570-190,000 (259-86,183)	120,000 (13,558)	14,400,000 (1,626,980)	18,000,000 (2,033,730)	23,500,000 (2,655,140)	34-90 (151-400)	0.60	42.6 (19.32)
A 2 x 8	580-200,000 (263-90,719)	170,000 (19,207)	16,800,000 (1,898,150)	21,000,000 (2,372,680)	27,000,000 (3,050,590)	51-144 (227-641)	0.70	49.1 (22.27)
A 2 x 10	720-250,000 (327-113,399)	210,000 (23,727)	19,200,000 (2,169,310)	24,000,000 (2,711,640)	31,000,000 (3,502,530)	35-101 (156-449)	0.80	57.8 (26.22)
A 3 x 5	1,050-340,000 (476-154,223)	140,000 (15,818)	20,000,000 (2,259,700)	25,000,000 (2,824,620)	32,500,000 (3,672,010)	59-156 (262-694)	0.60	72.1 (32.70)
A 3 x 8	1,200-400,000 (544-181,439)	250,000 (28,246)	32,000,000 (3,615,520)	40,000,000 (4,519,390)	52,000,000 (5,875,210)	62-162 (275-721)	0.80	84.9 (38.51)
A 3 x 12	1,350-450,000 (612-204,119)	390,000 (44,064)	48,000,000 (5,423,270)	60,000,000 (6,779,090)	78,000,000 (8,812,820)	60-160 (267-712)	1.20	105.0 (47.63)

(CA) Self-Compensating and (A) Adjustable

Ordering Information Self-Compensating Models

CA 2 x 8 R - 3

Return Method and Accumulator Style	Bore Size	Stroke Length		Mounting Style		Effective Weight
CA = Spring Return, Internal Accumulator	2	2	8	-F	Front Flange	-1 Light
CAA = Air Return, External Accumulator	3	4	10	-R	Rear Flange	-2 Medium Light
CSA = Spring Return, External Accumulator		5	12	-RF	Rectangular Front Flange	-3 Medium Heavy
CNA = Self (Clevis) Return, Internal Accumulator		6		-RR	Rectangular Rear Flange	-4 Heavy
				-S	Side Foot Mount	
				-C	Clevis Mount	

Ordering Information Adjustable Models



A 2 x 8 - R

Return Method and Accumulator Style	Bore Size	Stroke Length		Mounting Style	
A = Spring Return, Internal Accumulator	2	2	8	-F	Front Flange
AA = Air Return, External Accumulator	3	4	10	-R	Rear Flange
SA = Spring Return, External Accumulator		5	12	-RF	Rectangular Front Flange
NA = Self (Clevis) Return, Internal Accumulator		6		-RR	Rectangular Rear Flange
				-S	Side Foot Mount
				-C	Clevis Mount


Note: A no button option is available on the 3" Bore only as a special.

Self-Compensating



Rear Flange

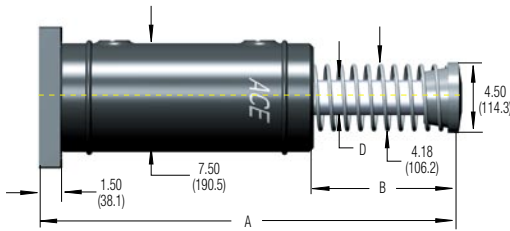



Front Flange

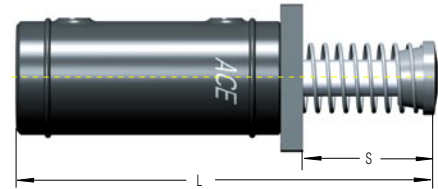




Standard Mount

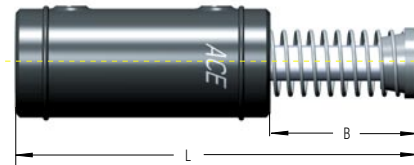

Side-Foot Mount

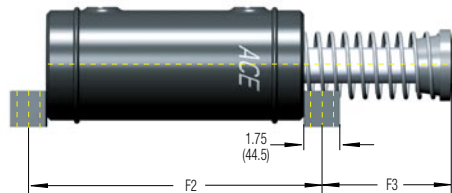

Clevis Mount

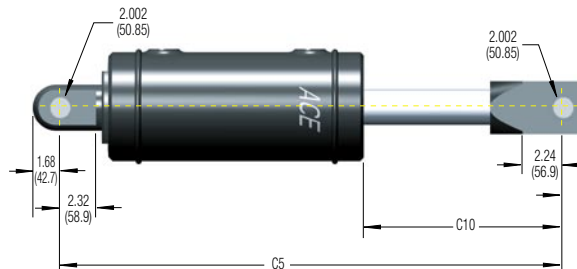

Technical Data

Impact velocity range: 1 to 16.5 ft/sec (0.30 to 5 m/sec)

Operating temperature: 10° to 150° F (-12° to 66° C)

Mechanical stop: Must be provided 0.09 inch (2.3 mm) before end of stroke.

Oil type: ATF

Self-Compensating

Dimensions in inches (millimeters)

Size	Stroke	A	B	D	H	L	S	C5	C10	F2	F3
CA 4 x 6	6.00 (152.4)	28.21 (716.5)	10.96 (278.4)	2.12 (53.8)	4.50 (114.3)	26.71 (678.4)	9.46 (240.3)	33.03 (839.0)	12.90 (327.7)	17.50 (447.5)	10.90 (256.3)
CSA 4 x 6											
CAA 4 x 6	6.00 (152.4)	26.21 (665.7)	8.96 (227.6)	2.12 (53.8)	4.50 (114.3)	24.71 (628.4)	7.46 (188.0)	31.03 (788.2)	10.90 (276.9)	17.50 (447.5)	8.09 (205.5)
CNA 4 x 6		N/A	N/A			N/A	N/A			N/A	N/A
CA 4 x 8	8.00 (203.2)	32.31 (818.1)	12.96 (329.2)	2.12 (53.8)	4.50 (114.3)	30.71 (780.0)	11.46 (291.1)	37.03 (940.6)	14.90 (378.5)	19.50 (495.3)	12.09 (307.1)
CSA 4 x 8											
CAA 4 x 8	8.00 (203.2)	30.21 (767.3)	10.96 (278.4)	2.12 (53.8)	4.50 (114.3)	28.71 (729.2)	9.46 (240.3)	35.03 (889.8)	12.90 (327.7)	19.50 (495.3)	10.09 (256.3)
CNA 4 x 8		N/A	N/A			N/A	N/A			N/A	N/A
CA 4 x 16	16.00 (406.4)	51.21 (1,300.7)	23.96 (608.6)	2.50 (63.5)	5.00 (127.0)	49.71 (1,262.6)	22.46 (570.5)	56.03 (1,423.2)	25.90 (657.9)	27.50 (698.5)	23.09 (586.5)
CSA 4 x 16											
CAA 4 x 16	16.00 (406.4)	46.21 (1,173.7)	18.96 (481.6)	2.50 (63.5)	5.00 (127.0)	44.71 (1,135.6)	17.46 (443.5)	51.03 (1,296.2)	20.90 (530.9)	27.50 (698.5)	18.09 (459.5)
CNA 4 x 16		N/A	N/A			N/A	N/A			N/A	N/A

Specifications


Model	We Effective Weight lbs (kg)	E ₃ Energy per Cycle in lbs (Nm)	Energy per Hour in lbs/hour (Nm/hour) E ₄		Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
			Internal Accumulator (Self-Contained)	External Accumulator (A/O Tank)			
4 x 6-3	8,000-19,000 (3,600-8,600)	420,000 (47,500)	27,000,000 (3,000,000)	45,000,000 (5,100,000)	108-222 (480-1,000)	Consult Factory	132 (60)
4 x 6-5	19,000-41,000 (8,600-18,600)						
4 x 6-7	41,000-94,000 (18,600-42,700)						
4 x 8-3	11,000-25,000 (5,000-11,400)	560,000 (63,300)	30,000,000 (3,400,000)	50,000,000 (5,600,000)	71-222 (310-1,000)	Consult Factory	150 (68)
4 x 8-5	25,000-55,000 (11,400-25,000)						
4 x 8-7	55,000-125,000 (25,000-57,000)						
4 x 16-3	22,000-50,000 (10,000-23,000)	1,120,000 (126,500)	50,000,000 (5,600,000)	85,000,000 (9,600,000)	Consult Factory	Consult Factory	321 (146)
4 x 16-5	50,000-110,000 (23,000-50,000)						
4 x 16-7	110,000-250,000 (50,000-114,000)						

Ordering Information


CA 4 x 8 R - 5				
Return Method and Accumulator Style	Bore Size	Stroke Length	Mounting Style	Effective Weight
CA = Spring Return, Internal Accumulator	4	6	-F Front Flange	-3 Light
CAA = Air Return, External Accumulator		8	-R Rear Flange	-5 Medium
CSA = Spring Return, External Accumulator		16	-RP Rear Standard	-7 Heavy
CNA = Self (Clevis) Return, Internal Accumulator			-FP Front Standard	
			-FRP Front and Rear Standard	
			-S Side Foot Mount	
			-C Clevis Mount	

Air/Oil Tanks


AO-1

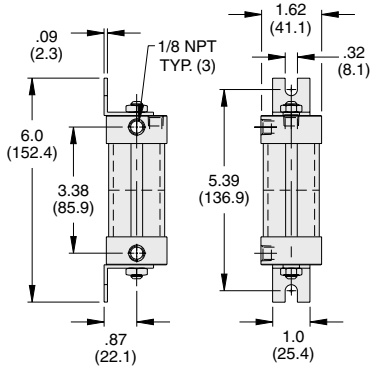


AO-3

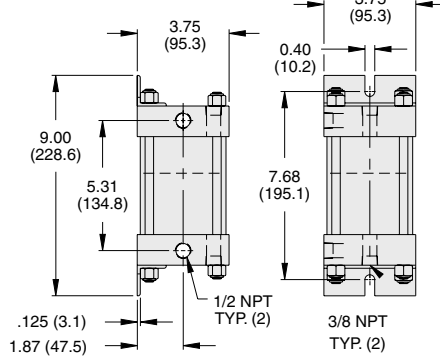

AO-6-91

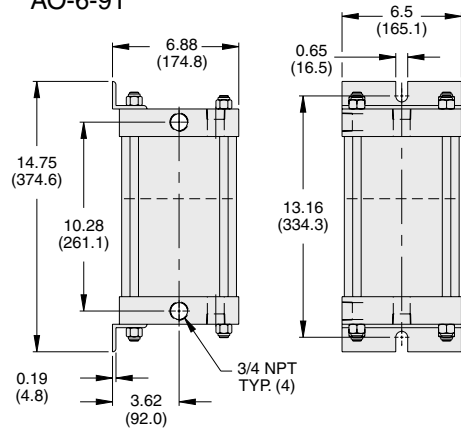

AO-81 and AO-82

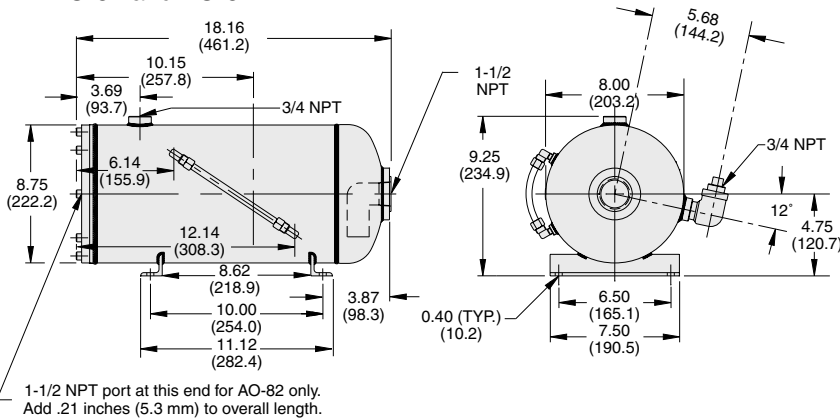


Capacity (Maximum)


Model	Oil Temp °F (°C)	Max Pressure psi (bar)	Tank Capacity cu/in (cu/cm)	Fill Level oz. (L)	Recommended for Shock Absorber Size
AO-1	175 (79)	100 (7)	2.4 (39.32)	.6 (0.02)	MCA, MCS 33, 36, 45 MAA, MAS 33, 36, 45 MLA, MLS 33, 36, 45
AO-3	175 (79)	100 (7)	35 (573)	12.5 (0.37)	1-1/2 x 2 1-1/2 x 3-1/2 MCA, MCS *33, *36, *45, 64 MAA, MAS *33, *36, *45, 64 MLA, MLS *33, *36, *45, 64
AO-6-91	200 (93)	100 (7)	245 (4,015)	88 (2.60)	1-1/2 x 5 - 3 x 12 MCA, MCS *64 MAA, MAS *64 MLA, MLS *64
AO-81	200 (93)	100 (7)	740 (12,126)	205 (6.06)	4 x 6 - 4 x 16
AO-82	200 (93)	100 (7)	740 (12,126)	205 (6.06)	4 x 6 - 4 x 16

*With re-circulating circuit, example 3 below.


Mounting and Circuits




1. The piston rod is immediately returned to its extended position after completing its stroke.



2. Return stroke may be sequenced by pneumatic valve at any desired time. No return force until valve energized.




3. A re-circulating cooling circuit allows warm oil to return to the tank while cool oil refills the shock absorber. A re-circulating cooling circuit substantially increases the shock absorber's hourly energy capacity.

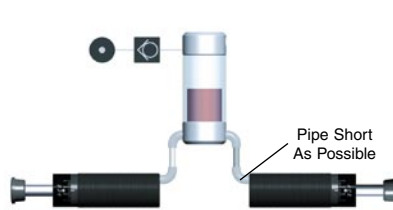

4. When connecting more than one shock absorber to an Air-Oil Tank, use caution in selecting the proper reservoir capacity. For two shock absorbers, the next largest Air-Oil Tank size is usually adequate.


Check Valves

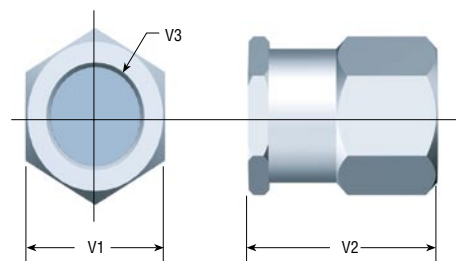

ACE check valves, for use with Air-Oil Tanks, are made of lightweight anodized aluminum. Dimensions below are in inches (millimeters).

Size	V1	V2	V3
CV-1/8	.75 (19.1)	.94 (23.8)	1/8-27 NPT
CV-1/4	1.125 (28.6)	1.31 (33.3)	1/4-18 NPT
CV-3/8	1.125 (28.6)	1.31 (33.3)	3/8-18 NPT
CV-1/2	1.625 (41.3)	1.56 (39.7)	1/2-14 NPT
CV-3/4	1.875 (47.6)	2.31 (58.7)	3/4-14 NPT

Mounting Hints and Operation Details

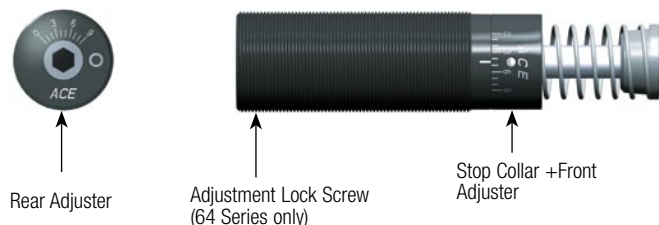

Mechanical Stop

The Magnum Series units have a built in Stop Collar (mechanical stop) which also serves as the front adjuster. If using a shock absorber without a Stop Collar it is important to install a mechanical stop 0.02 to 0.04 inches (0.5 to 1 mm) before the end of the stroke.

General Information

For optimum heat dissipation do not paint the shock absorber. For applications in environments with acids, dusts or powders, abrasives, steam or water, a reasonable effort should be made to protect the shock absorber. Consider adding the air bleed collar to select models (MC 150M, MC 225M and MC 600M). See miniature shock absorber accessories, pages 40, 41 and 42 and Installation Examples, pages 14 and 15. The shock absorber should be securely mounted onto a flat and smooth surface of adequate strength.

Self-Compensating Models

The MC Magnum Group of shock absorbers are self-compensating. Providing the effective weight on the application remains within the range given in the capacity charts then no adjustment is necessary for changes in weight, speed or propelling force. These units are available with four standard operating ranges (We min. – We max.) and are identified by the suffix number after the model which goes from -1 (very soft) up to -4 (very hard).

The optimum deceleration is achieved when there is no abrupt change in the load velocity at the beginning or the end of the shock absorber stroke. If there is a hard impact at the start of stroke use the next softer version (i.e. lower suffix number). If there is a hard setdown at the end of stroke use the next harder version, or mount two units in parallel. Alternatively change to a larger bore size unit. Contact ACE for further advice.

Adjustable Models

The adjustment has a graduated scale from 0 to 9. The adjuster in the body has a side mounted locking screw which should be loosened (1/2 turn max.) with a hex. key before commencing adjustment. The Magnum Series units can be adjusted by the hex. socket at the rear of the body – or by rotating the front stop collar. Both adjusters are internally connected and will show the same adjustment value on the scales as they are turned. After installation cycle the equipment a few times and turn the adjustment until optimum deceleration is achieved (i.e. no abrupt change in the load velocity observed at the beginning or at the end of shock absorber stroke). The shock absorber is set at 5 when delivered. If there is a hard impact at start of stroke adjust the unit softer i.e. towards 9 on the scale. If there is a hard setdown at end of stroke adjust the unit harder i.e. towards 0. After adjustment relock the lock screw.

Adjustment approaching "0" means:

- a) Impact velocity is too low: consider changing to Model type ML or:
- b) Shock absorber selected is too small: use next larger size or mount 2 units in parallel.

Mounting Options

Clevis Mounting


Basic Model

Flange Mounting

Side Foot Mounting



Removing Rod End Button

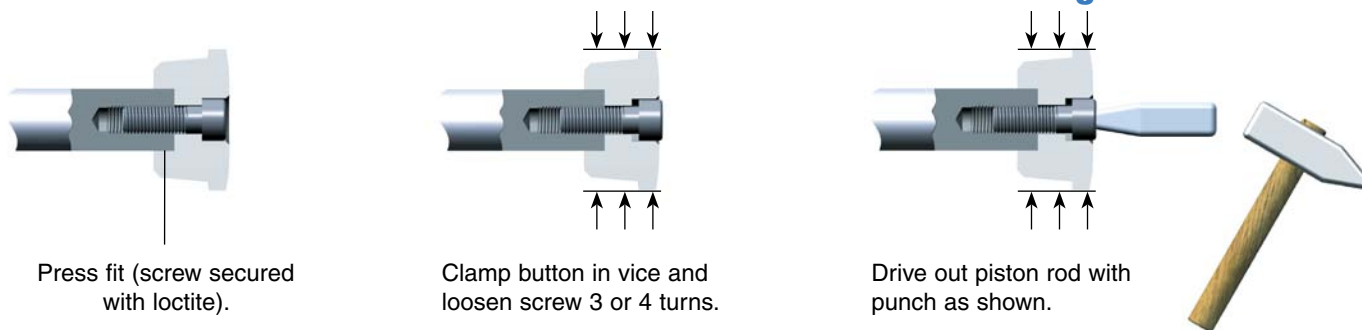

Repairs

It is possible to overhaul Ace shock absorbers in sizes larger than the MC 600. We would recommend that damaged or worn shock absorbers are returned to ACE for repair. You will find that this is more economical than the comparative cost of repairing yourself. Spare parts and seal kits etc. are available, if required.




ACE Stacker Crane Shock Absorbers (SCS Series) are designed primarily for **emergency applications** to improve the performance and safe operation of equipment such as **automated storage and retrieval systems**. During normal operation, the shock absorbers are required to provide only minimal resistance, but are designed to function under full load conditions when necessary. In an emergency condition, when the velocity of the system carriage or trolley is greater than normal, the SCS shock absorber responds to protect the installation by providing controlled deceleration.

In the normal ready condition the piston rod is fully extended. When the impacting load strikes the absorber, the hydraulic oil behind the piston is forced out through a series of metering orifices. The number of metering orifices in action reduces proportionally through the stroke and the load velocity is thereby smoothly reduced to zero. The internal pressure and thus the reaction force remains constant throughout the entire stroke length. The displaced oil is stored in the bladder accumulator. The integrated gas chamber, containing low pressure nitrogen, provides the return force to reset the rod to its extended position and functions as an accumulator for the hydraulic oil displaced during operation.

Applications include: automated storage and retrieval systems, automotive manufacturing and production equipment, theme park rides, and small overhead cranes.

70

Stacker Crane Shock Absorbers SCS-38 to 63

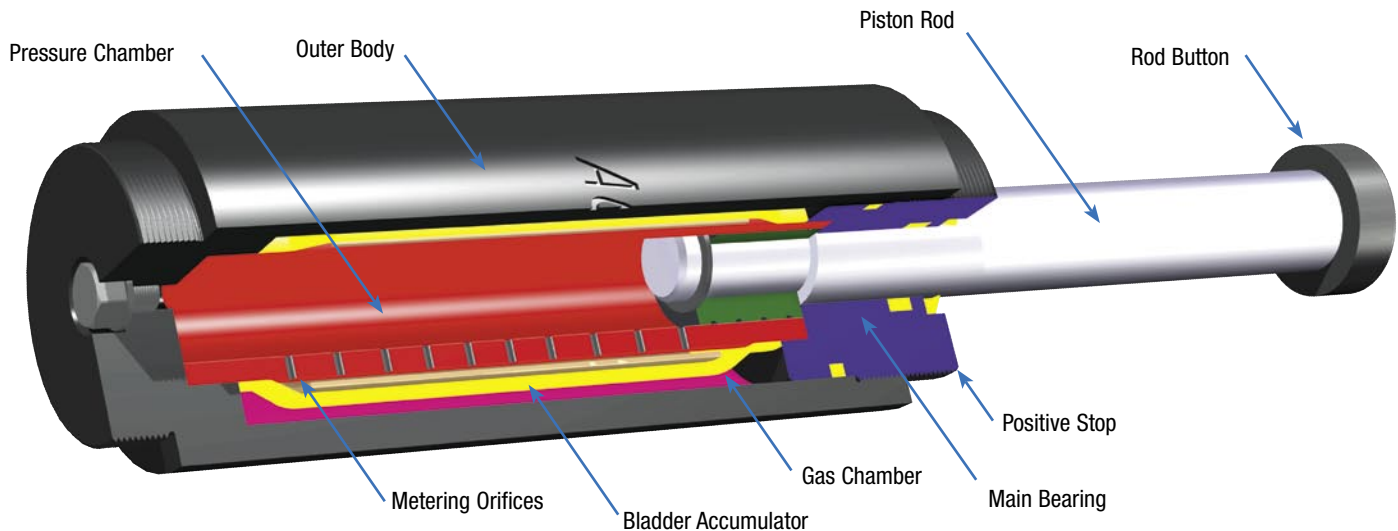


Ordering Information


SCS-38-200-F- -X

SCS Series	Bore Diameter (mm)	Stroke Length (mm)	Flange Location	Application Number	Specials
Stacker Crane Shock Absorbers	38	50	F Front Flange		Environmental Finish Custom Flanges Fluid
	50	100	R Rear Flange		
	63	150	S Side Mount		
		200			
		250			
		300			
		1000			
		1200			


Rear Flange

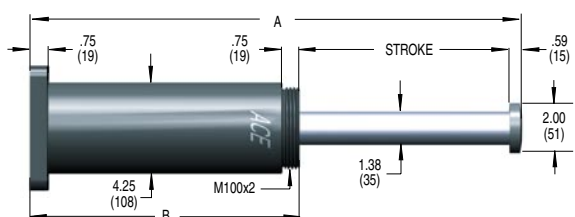

Front Flange

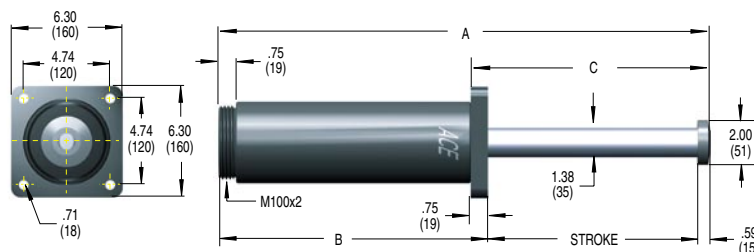

Side Mount

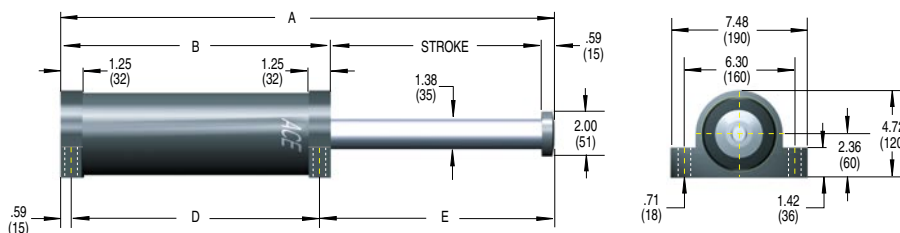

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	E_3	W_e	Shipping Weight	
							Energy per Cycle in lbs (kNm)	Effective Weight Range lbs (kg)	lbs (kg)	S
SCS-38-50	1.97 (50)	10.63 (270)	8.07 (205)	3.31 (84)	6.89 (175)	3.15 (80)	32,000 (3.6)	750-19,600 (340-8,900)	27.3 (12.4)	29.1 (13.2)
SCS-38-100	3.94 (100)	14.57 (370)	10.04 (255)	5.28 (134)	8.77 (225)	5.21 (132)	64,000 (7.2)	1,500-39,200 (680-17,800)	32.0 (14.5)	33.8 (15.4)
SCS-38-150	5.91 (150)	18.50 (470)	12.01 (305)	7.24 (184)	10.83 (275)	7.08 (180)	96,000 (10.8)	2,250-58,900 (1,020-26,700)	35.9 (16.3)	37.8 (17.1)
SCS-38-200	7.87 (200)	22.44 (570)	13.98 (355)	9.21 (234)	12.80 (325)	9.05 (230)	127,000 (14.4)	3,000-78,500 (1,360-35,600)	39.9 (18.1)	41.7 (18.9)
SCS-38-250	9.84 (250)	26.38 (670)	15.94 (405)	11.18 (284)	14.77 (375)	11.02 (280)	159,000 (18.0)	3,750-97,900 (1,700-44,400)	43.8 (19.9)	45.6 (20.7)
SCS-38-300	11.81 (300)	30.91 (785)	18.50 (470)	13.15 (334)	17.33 (440)	12.99 (330)	191,000 (21.6)	4,500-117,500 (2,040-53,300)	48.9 (22.2)	50.7 (23.0)
SCS-38-350	13.78 (350)	34.84 (885)	20.47 (520)	15.12 (384)	19.29 (490)	14.96 (380)	223,000 (25.2)	5,250-137,100 (2,380-62,200)	52.8 (23.9)	54.6 (24.8)
SCS-38-400	15.75 (400)	39.37 (1,000)	23.03 (585)	17.09 (434)	21.85 (555)	16.93 (430)	255,000 (28.8)	6,000-156,700 (2,720-711,000)	57.9 (26.2)	59.7 (27.1)
SCS-38-500	19.69 (500)	47.83 (1,215)	27.56 (700)	21.02 (534)	26.38 (670)	20.56 (530)	319,000 (36.0)	7,500-196,000 (3,400-88,900)	66.9 (30.3)	68.7 (31.2)
SCS-38-600	23.62 (600)	56.30 (1,430)	32.09 (815)	24.96 (634)	30.91 (785)	24.80 (630)	382,000 (43.2)	8,990-235,200 (4,080-106,700)	75.9 (34.4)	77.7 (35.3)
SCS-38-700	27.56 (700)	64.76 (1,645)	36.61 (930)	28.90 (734)	35.43 (900)	28.74 (730)	446,000 (50.4)	10,490-274,300 (4,760-124,400)	84.9 (38.5)	86.7 (39.3)
SCS-38-800	31.50 (800)	73.23 (1,860)	41.14 (1,045)	32.83 (834)	39.97 (1,015)	32.67 (830)	510,000 (57.6)	11,990-313,500 (5,440-142,200)	93.9 (42.6)	95.7 (43.4)

Technical Data

Maximum force: 18,000 lbs (80 kN)

Impact velocity range: 3-15 ft/sec (0.9 to 4.6 m/s)

Minimum return force: 45 lbs. (0.2 kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.


Note: Buttons are standard on all stacker crane shock absorbers.

Oil type: ATF



All stacker crane shock absorbers have special orifice designs and must be sized per application.

Note: All dimensions and tolerance values listed in this catalog are nominal and subject to change without prior notice.



Rear Flange

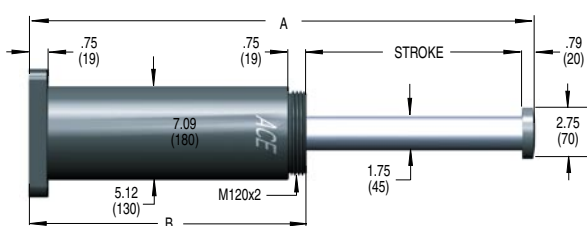

Front Flange

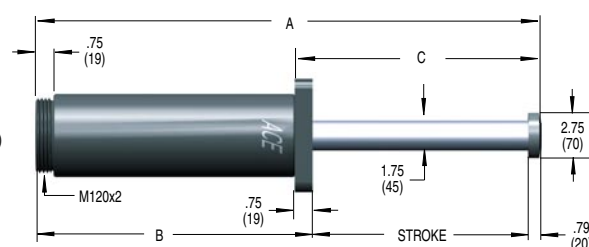

Side Mount

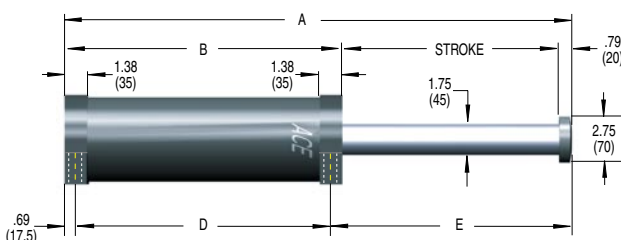

72 Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	E_3	W_e	Shipping Weight	
							Energy per Cycle in lbs (kNm)	Effective Weight Range lbs (kg)	lbs (kg) F&R S	
SCS-50-100	3.94 (100)	15.35 (390)	10.63 (270)	5.47 (139)	9.25 (235)	5.41 (138)	124,000 (14)	2,950-172,000 (1,340-78,000)	48.1 (21.8)	51.3 (23.3)
SCS-50-150	5.91 (150)	19.29 (490)	12.60 (320)	7.44 (189)	11.22 (285)	7.38 (188)	186,000 (21)	4,430-258,000 (2,010-117,000)	53.7 (24.4)	57.0 (25.8)
SCS-50-200	7.87 (200)	23.23 (590)	14.57 (370)	9.41 (239)	13.19 (335)	9.35 (238)	248,000 (28)	5,910-344,000 (2,680-156,000)	59.1 (26.8)	62.3 (28.3)
SCS-50-250	9.84 (250)	27.17 (690)	16.54 (420)	11.38 (289)	15.16 (385)	11.32 (288)	310,000 (35)	7,390-428,000 (3,350-194,000)	64.9 (29.4)	68.1 (30.9)
SCS-50-300	11.81 (300)	31.69 (805)	19.09 (485)	13.35 (339)	17.71 (450)	13.29 (338)	372,000 (42)	8,860-514,000 (4,020-233,000)	71.6 (32.5)	74.9 (34.0)
SCS-50-350	13.78 (350)	35.63 (905)	21.06 (535)	15.31 (389)	19.69 (500)	15.25 (387)	434,000 (49)	10,340-600,000 (4,690-272,000)	77.2 (35.0)	80.4 (36.5)
SCS-50-400	15.75 (400)	40.16 (1,020)	23.62 (600)	17.28 (439)	22.25 (565)	17.22 (438)	496,000 (56)	11,820-686,000 (5,360-311,000)	84.2 (38.2)	87.5 (39.7)
SCS-50-500	19.69 (500)	48.62 (1,235)	28.15 (715)	21.22 (539)	26.77 (680)	21.16 (538)	620,000 (70)	14,750-858,000 (6,690-389,000)	96.8 (43.9)	100.1 (45.4)
SCS-50-600	23.62 (600)	57.09 (1,450)	32.68 (830)	25.16 (639)	31.30 (795)	25.10 (638)	743,000 (84)	17,700-1,030,000 (8,030-467,000)	109.4 (49.6)	112.7 (51.1)
SCS-50-700	27.56 (700)	65.55 (1,665)	37.20 (945)	29.09 (739)	35.83 (910)	29.03 (737)	867,000 (98)	20,660-1,199,000 (9,370-544,000)	122.0 (55.3)	125.2 (56.8)
SCS-50-800	31.50 (800)	74.02 (1,880)	41.73 (1,060)	33.03 (839)	40.36 (1,025)	32.97 (838)	991,000 (112)	23,590-1,371,000 (10,700-622,000)	134.6 (61.0)	137.8 (62.5)
SCS-50-1000	39.37 (1,000)	90.94 (2,310)	50.79 (1,290)	40.91 (1,039)	49.40 (1,255)	40.85 (1,038)	1,239,000 (140)	29,540-1,715,000 (13,400-778,000)	159.7 (72.4)	163.0 (73.9)

Technical Data

Maximum force: 36,000 lbs (160 kN)

Impact velocity range: 2-15 ft/sec (0.6 to 4.6 m/s)

Minimum return force: 72 lbs. (0.3 kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.


Oil type: ATF

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.


Buttons are standard on all stacker crane shock absorbers.

All stacker crane shock absorbers have special orifice designs and must be sized per application.


Rear Flange

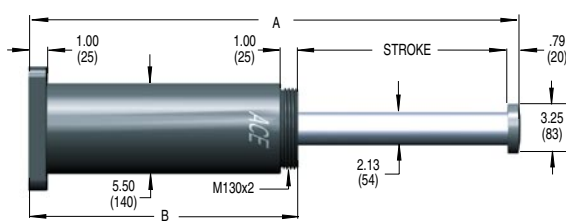

Front Flange

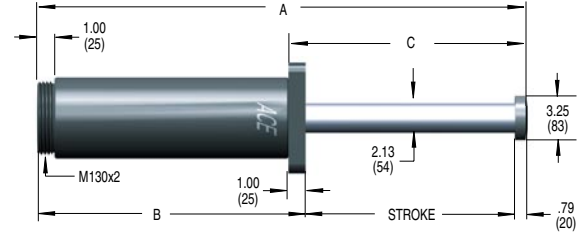

Side Mount

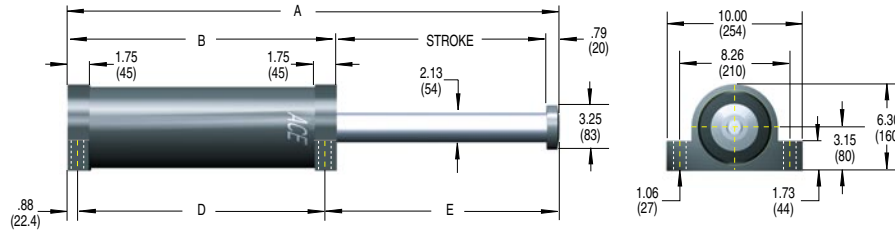

Dimensions in inches (millimeters)

Model	Stroke	A	B	C	D	E	Energy per Cycle in lbs (kNm)	Effective Weight Range lbs (kg)	Shipping Weight lbs (kg) F&R S
SCS-63-100	3.94 (100)	15.94 (405)	11.22 (285)	5.71 (145)	9.47 (241)	5.59 (142)	159,000 (18)	3,750-317,000 (1,700-144,000)	62.8 (28.5) 71.2 (32.3)
SCS-63-150	5.91 (150)	19.88 (505)	13.19 (335)	7.68 (195)	11.44 (291)	7.56 (192)	239,000 (27)	5,620-476,000 (2,550-216,000)	69.6 (31.6) 78.0 (35.4)
SCS-63-200	7.87 (200)	23.82 (605)	15.16 (385)	9.65 (245)	13.41 (341)	9.53 (242)	319,000 (36)	7,500-635,000 (3,400-288,000)	76.4 (34.6) 84.7 (38.4)
SCS-63-250	9.84 (250)	27.76 (705)	17.13 (435)	11.61 (295)	15.39 (391)	11.49 (292)	398,000 (45)	9,370-794,000 (4,250-360,000)	83.2 (37.7) 91.6 (41.5)
SCS-63-300	11.81 (300)	31.69 (805)	19.09 (485)	13.58 (345)	17.35 (441)	13.46 (342)	478,000 (54)	11,240-952,000 (5,100-432,000)	90.0 (40.8) 98.3 (44.6)
SCS-63-350	13.78 (350)	36.42 (925)	21.85 (555)	15.55 (395)	20.11 (511)	15.43 (392)	558,000 (63)	13,120-1,111,000 (5,950-504,000)	99.3 (45.1) 107.7 (48.9)
SCS-63-400	15.75 (400)	40.35 (1,025)	23.82 (605)	17.52 (445)	22.01 (561)	17.40 (442)	637,000 (72)	15,010-1,270,000 (6,810-576,000)	106.1 (48.1) 114.5 (51.9)
SCS-63-500	19.69 (500)	49.02 (1,245)	28.54 (725)	21.46 (545)	26.80 (681)	21.34 (542)	797,000 (90)	18,760-1,587,000 (8,510-720,000)	122.3 (55.5) 130.7 (59.3)
SCS-63-600	23.62 (600)	56.89 (1,445)	32.48 (825)	25.39 (645)	30.74 (781)	25.30 (642)	956,000 (108)	22,510-1,905,000 (10,210-864,000)	135.9 (61.6) 144.2 (65.4)
SCS-63-700	27.56 (700)	65.55 (1,665)	37.20 (945)	29.33 (745)	35.46 (901)	29.21 (746)	1,115,000 (126)	26,260-2,222,000 (11,910-1,008,000)	152.0 (69.0) 160.4 (72.8)
SCS-63-800	31.50 (800)	73.43 (1,865)	41.14 (1,045)	33.27 (845)	39.40 (1,001)	33.15 (842)	1,275,000 (144)	29,980-2,540,000 (13,600-1,152,000)	165.6 (75.1) 174.0 (78.9)
SCS-63-1000	39.37 (1,000)	89.96 (2,285)	49.80 (1,265)	41.14 (1,045)	48.06 (1,221)	41.02 (1,042)	1,593,000 (180)	37,480-3,175,000 (17,000-1,440,000)	195.4 (88.6) 203.7 (92.4)
SCS-63-1200	47.24 (1,200)	106.50 (2,705)	58.46 (1,485)	49.02 (1,245)	56.72 (1,441)	48.90 (1,242)	1,912,000 (216)	44,970-3,810,000 (20,400-1,728,000)	225.1 (102.1) 233.5 (105.9)

Technical Data

Maximum force: 47,200 lbs (210 kN)

Impact velocity range: 1.6-15 ft/sec (0.5 to 4.6 m/s)

Minimum return force: 106 lbs. (0.5 kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.

Oil type: ATF

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.

Buttons are standard on all stacker crane shock absorbers.

All stacker crane shock absorbers have special orifice designs and must be sized per application.




ACE CB Series Heavy Industrial Shock Absorbers are designed for emergency deceleration and improved performance of large industrial equipment. During normal operation at low velocity, the shock absorbers provide minimal pneumatic resistance. In an emergency or high velocity condition, the shock absorbers respond hydraulically to protect the installation from damaging reaction forces by providing controlled deceleration.

ACE Crane and Heavy Industrial Shock Absorbers are self-contained devices which utilize multiple orifices to provide controlled linear deceleration while minimizing reaction forces. In the ready and normal position, the piston rod is extended. When the impact load strikes the shock absorber, hydraulic fluid is displaced by a piston through the orifices in the metering tube. As the shock absorber continues through the stroke, the orifices are progressively closed and the velocity is reduced while the kinetic energy is converted to thermal energy. As a result, the load is brought to rest without the high recoil forces and low efficiencies associated with helical springs and rubber bumpers. The displaced oil passes into a gas pressurized piston accumulator located within the piston rod. By controlling the flow of the fluid, the rod is smoothly returned to the extended and ready position for the next cycle.

Application include: overhead cranes, conveyors, turntables, dockside equipment, steel/foundries, elevators, lumber mills, offshore rigs and bridges.

Industrial Crane Bumper Shocks **CB-63 to 160**

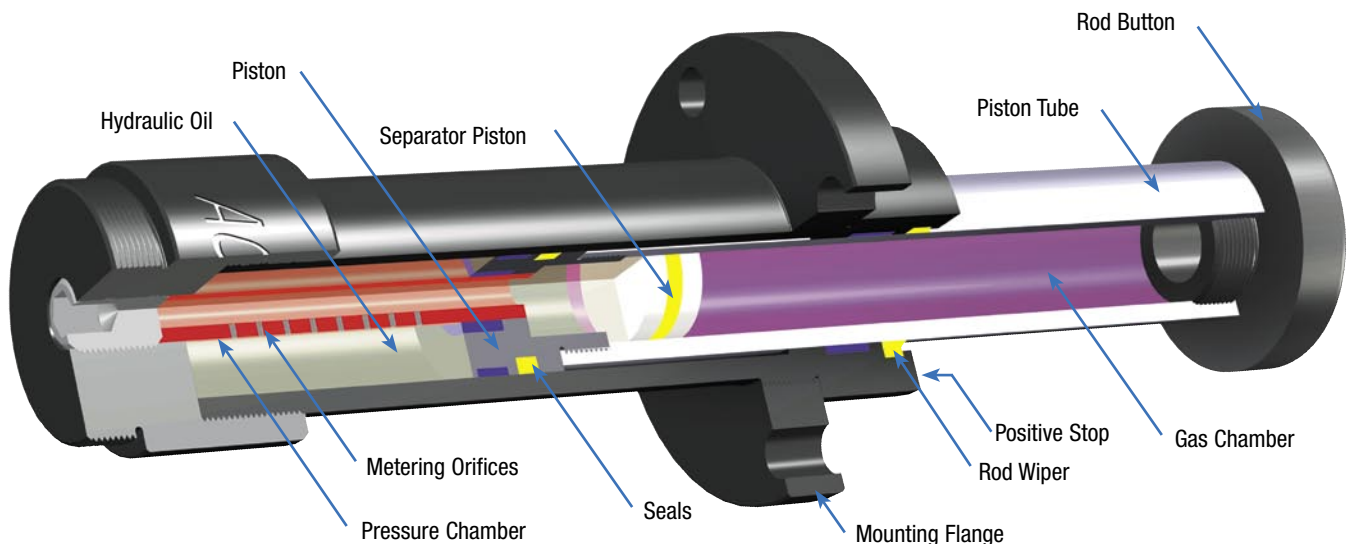


Ordering Information


CB-63-100-F-B- -X

CB Series	Bore Diameter (mm)	Stroke Length (mm)	Flange Location	Crane Button and Safety Cable	Application Number	Specials
Industrial Crane Bumper Shock	63 100 160	100 500 200 600 300 800 400	F Front Flange R Rear Flange	Standard with Button B Optional Larger Button (includes safety cable)		Environmental Finish Custom Flanges Fluid


Front Flange

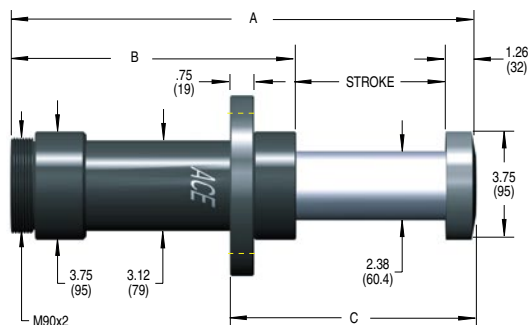

Rear Flange

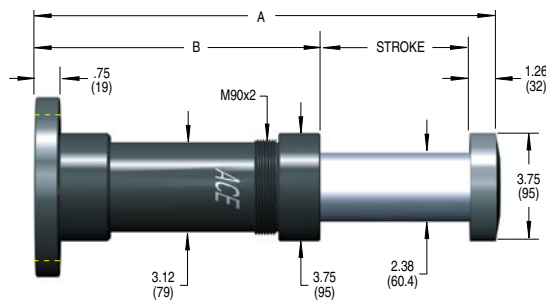

Flange



Dimensions in inches (millimeters)

Model	Stroke	A	B	C	Rod Return Force lbs (kN)		Energy per Cycle in lbs (kJm)	Effective Weight Range lbs. (kg)	Shipping Weight lbs (kg)
					Fully Out	Fully In			
CB-63-100	3.94 (100)	16.54 (420)	11.34 (288)	7.56 (192)	344 (1.5)	3,669 (16.3)	141,600 (16)	3,330-282,000 (1,510-128,000)	28.0 (12.7)
CB-63-200	7.87 (200)	27.56 (700)	18.43 (468)	11.50 (292)	344 (1.5)	4,815 (21.4)	283,200 (32)	6,660-564,000 (3,020-256,000)	36.8 (16.7)
CB-63-300	11.81 (300)	38.58 (980)	25.51 (648)	15.43 (392)	344 (1.5)	5,393 (24.0)	424,800 (48)	10,010-847,000 (4,540-384,000)	45.8 (20.8)
CB-63-400	15.75 (400)	49.61 (1,260)	32.60 (828)	19.37 (492)	344 (1.5)	5,720 (25.4)	566,400 (64)	13,340-1,129,000 (6,050-512,000)	54.6 (24.8)
CB-63-500	19.69 (500)	60.63 (1,540)	39.69 (1,008)	23.31 (592)	344 (1.5)	5,949 (26.5)	708,000 (80)	16,670-1,411,000 (7,560-640,000)	63.5 (28.8)

Technical Data

Maximum force: 42,000 lbs. (187 kN)

Impact velocity range: 1.6-15 ft/sec (0.5 to 4.6 m/s)

Minimum return force: 106 lbs. (0.5kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.

Oil type: ATF

Buttons are standard on all industrial crane bumper shock absorbers. Safety cable is optional.

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.

All crane bumper shock absorbers have special orifice designs and must be sized per application.

ACE Controls crane bumper shock absorbers are designed to AISE standards.


Optional Larger Button

(Optional larger button includes safety cable)


Diameter Z	CB-63	CB-100	CB-160
inch	5.00	7.00	9.00
(mm)	(127)	(178)	(229)




Front Flange

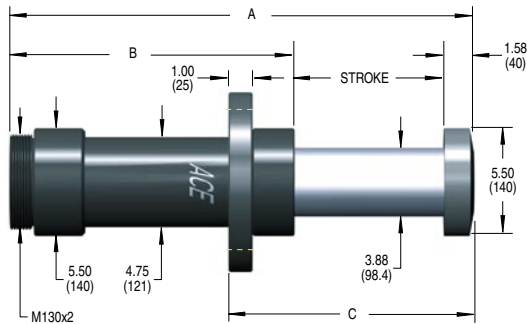

Rear Flange

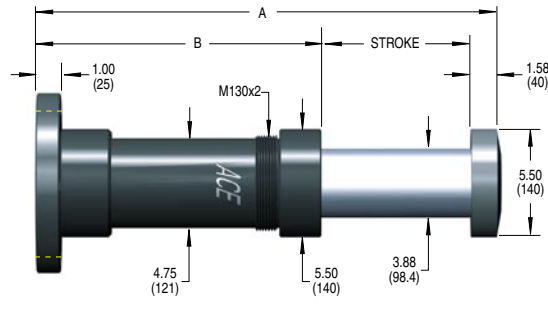

Flange



Dimensions in inches (millimeters)

Model	Stroke	A	B	C	Rod Return Force		E ₃ Energy per Cycle in lbs (kNm)	We Effective Weight Range lbs (kg)	Shipping Weight lbs (kg)
					lbs (kN) Fully Out	lbs (kN) Fully In			
CB-100-200	7.87 (200)	28.94 (735)	19.49 (495)	12.60 (320)	880 (3.9)	8,850 (39.4)	708,000 (80)	16,670-1,411,000 (7,560-640,000)	93.7 (42.5)
CB-100-300	11.81 (300)	39.57 (1,005)	26.18 (665)	16.54 (420)	880 (3.9)	11,196 (49.8)	1,062,000 (120)	25,000-2,116,000 (11,340-960,000)	112.1 (50.8)
CB-100-400	15.75 (400)	50.20 (1,275)	32.87 (835)	20.47 (520)	880 (3.9)	12,912 (57.4)	1,416,000 (160)	33,330-2,822,000 (15,120-1,280,000)	130.4 (59.1)
CB-100-500	19.69 (500)	60.83 (1,545)	39.57 (1,005)	24.41 (620)	880 (3.9)	14,216 (63.2)	1,770,000 (200)	41,670-3,527,000 (18,900-1,600,000)	148.7 (67.5)
CB-100-600	23.62 (600)	71.46 (1,815)	46.26 (1,175)	28.35 (720)	880 (3.9)	15,237 (67.8)	2,124,000 (240)	50,000-4,233,000 (22,680-1,920,000)	167.0 (75.8)

Technical Data

Maximum force: 105,000 lbs. (467 kN)

Impact velocity range: 1.6-15 ft/sec (0.5 to 4.6 m/s)

Minimum return force: 106 lbs. (0.5kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.

Oil type: ATF


Buttons are standard on all industrial crane bumper shock absorbers. Safety cable is optional.

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.

Optional Larger Button


(Optional larger button includes safety cable)

Diameter Z	CB-63	CB-100	CB-160
inch	5.00	7.00	9.00
(mm)	(127)	(178)	(229)

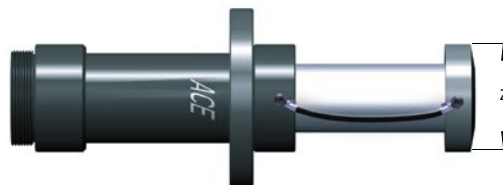


All crane bumper shock absorbers have special orifice designs and must be sized per application.
ACE Controls crane bumper shock absorbers are designed to AISE standards.


Front Flange

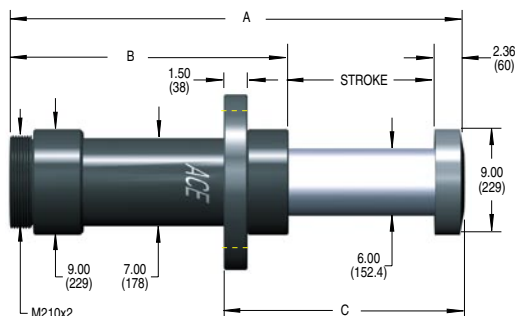

Rear Flange

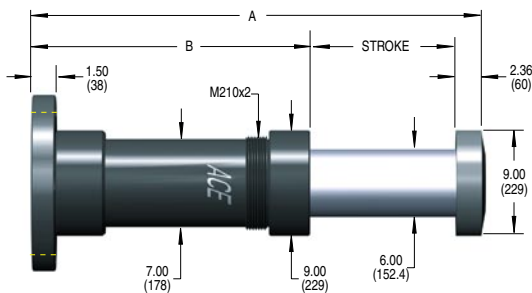

Flange



Dimensions in inches (millimeters)

Model	Stroke	A	B	C	Rod Return Force		Energy per Cycle in lbs (kJm)	Effective Weight Range lbs (kg)	Shipping Weight lbs (kg)
					Fully Out	Fully In			
CB-160-400	15.75 (400)	55.12 (1,400)	37.01 (940)	23.62 (600)	2,148 (9.6)	14,124 (62.8)	2,124,000 (240)	50,000-4,233,000 (22,680-1,920,000)	340.9 (154.6)
CB-160-600	23.62 (600)	78.74 (2,000)	52.76 (1,340)	31.50 (800)	2,148 (9.6)	14,135 (62.9)	3,186,000 (360)	75,000-6,349,000 (34,020-2,880,000)	414.4 (188.0)
CB-160-800	31.50 (800)	102.36 (2,600)	68.50 (1,740)	39.37 (1,000)	2,148 (9.6)	14,146 (62.9)	4,248,000 (480)	100,000-8,466,000 (45,360-3,840,000)	487.9 (221.3)

Technical Data

Maximum force: 157,000 lbs. (700 kN)

Impact velocity range: 1.6-15 ft/sec (0.5 to 4.6 m/s)

Minimum return force: 106 lbs. (0.5kN)

Operating temperature: 10° to 150°F (-12°C to 66°C)
(Consult factory for optional ranges).

Mechanical stop: Integral mechanical stop is built into the front of all units.

Oil type: ATF


Buttons are standard on all industrial crane bumper shock absorbers. Safety cable is optional.

Custom environmental protection options of paint, plating, rod bellows, etc. are available. Consult factory for your specific needs.

Optional Larger Button

(Optional larger button includes safety cable)

Diameter Z	CB-63	CB-100	CB-160
inch	5.00	7.00	9.00
(mm)	(127)	(178)	(229)

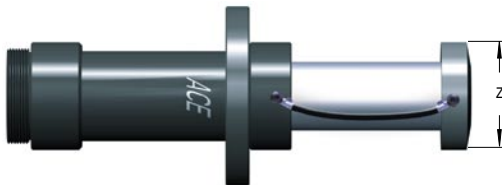

All crane bumper shock absorbers have special orifice designs and must be sized per application.
ACE Controls crane bumper shock absorbers are designed to AISE standards.

with Fine Adjustment

ACE VC Precision Feed Controls are sealed hydraulic units fitted with a high precision metering element. When the piston rod is depressed the hydraulic oil is forced through the adjustable precision metering orifice. This provides a constant and precise feed control throughout the stroke length. The feed rate can be adjusted over a wide range by turning the external adjuster knob at the rear end of the unit. The optional threaded outer body helps to simplify installation and the adjustment of feed control travel limits.

MA and MVC are similar feed control units intended for applications where the higher precision of the VC series is not required.

ACE Precision Feed Controls provide exact speed control for machine motion. They are self-contained, maintenance free, leakproof, temperature stable and stick-slip free. The rolling diaphragm seal, on models 2515 to 2555, provides a hermetically sealed unit and also provides an integral accumulator for the oil displaced during operation. The high precision, adjustable metering system can provide accurate feed rates from as little as 0.47 in/min (12 mm/min) with low propelling forces.

Applications include: saws, cutters, drill feeds, grinding and boring machines in the plastics, metal, wood and glass industries.

78

Technical Data

Feed rate range: min. 0.51 in/min with 90 lbs. (0.013 m/min with 400 N) propelling force. Maximum 1500 in/min with 787 lbs. (38 m/min with 3500 N) propelling force.

Do not rotate piston rod. If excessive rotation force is applied, rolling seal may rupture (only applies to VC 2515 to VC 2555).

Outer body: Smooth body standard 0.94 inch (23.8 mm) dia., threaded body optional.

When mounting take care not to damage the adjuster knob.


Temperature range: 32° to 140°F (0° to 60°C).

Material: Body heavy-duty steel tube with black oxide. Piston rod with hard chrome plating.

Adjustment: Adjust VC unit by turning adjustment knob at rear. Zero is full open (fast) and 20 is fully closed (slow).


Note: If the VC feed control will be in contact with petroleum based oils or cutting fluids, specify optional neoprene rolling seal or install Air Bleed Collar model SP 25 (only applies to VC 2515 to VC 2555).

Precision Hydraulic Feed Controller Models VC 2515-2555

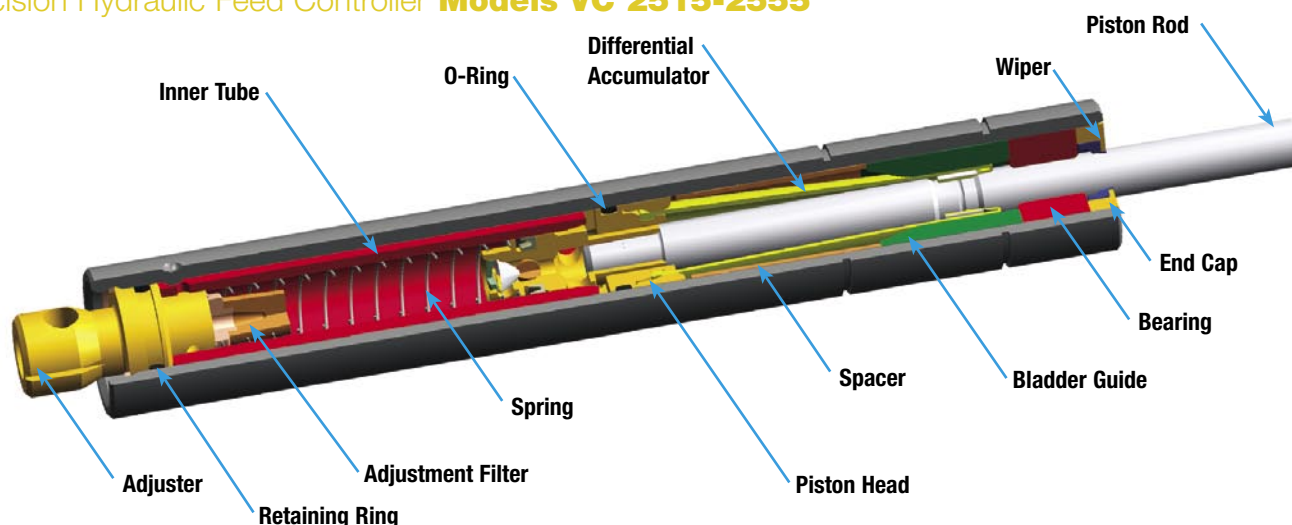



with Fine Adjustment

Model VC 25..

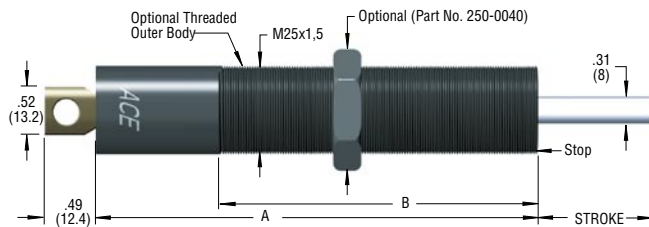

Smooth body - standard

Threaded body - optional

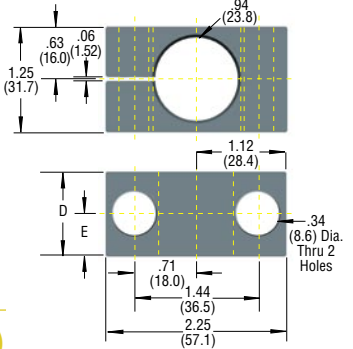Model SP-25
Part No. 10783-000Air Bleed Collar
for VC 2515 to 2555Clamp Mount
for Smooth BodySee chart below for D & E
dimensions

Dimensions in inches (millimeters)

Standard Model	Threaded Model	Stroke	A	B	Weight lbs. kg
VC 2515-F	VC 2515-FT	0.59 (15)	5.04 (128)	3.15 (80)	0.88 (0.4)
VC 2530-F	VC 2530-FT	1.18 (30)	6.34 (161)	4.33 (110)	1.10 (0.5)
VC 2555-F	VC 2555-FT	2.16 (55)	8.23 (209)	5.19 (130)	1.32 (0.6)
VC 2575-F	VC 2575-FT	2.95 (75)	11.14 (283)	5.90 (150)	1.76 (0.8)
VC 25100-F	VC 25100-FT	3.94 (100)	12.13 (308)	5.90 (150)	1.98 (0.9)
VC 25125-F	VC 25125-FT	4.92 (125)	13.13 (333.5)	5.90 (150)	2.20 (1.0)


F = fine adjuster/smooth body

FT = fine adjuster/threaded body

Specifications

Standard Model	Threaded Model	Propelling Force N		Return Force N		Reset Time seconds
		lbs.	(N)	lbs.	(N)	
VC 2515-F	VC 2515-FT	6.74 - 787	(30 - 3,500)	1.12 - 2.25	(5 - 10)	0.2
VC 2530-F	VC 2530-FT	6.74 - 787	(30 - 3,500)	1.12 - 3.37	(5 - 15)	0.4
VC 2555-F	VC 2555-FT	7.87 - 787	(35 - 3,500)	1.12 - 4.50	(5 - 20)	1.2
VC 2575-F	VC 2575-FT	11.24 - 787	(50 - 3,500)	7.39 - 11.56	(33 - 51)	1.7
VC 25100-F	VC 25100-FT	13.49 - 787	(60 - 3,500)	6.00 - 11.56	(27 - 51)	2.3
VC 25125-F	VC 25125-FT	15.74 - 787	(70 - 3,500)	5.23 - 11.23	(23 - 50)	2.8


Speed Control Chart

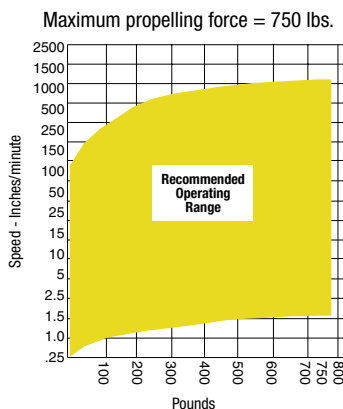

Dimensional Chart for Smooth Body Clamp

Model	D	E	Clamp Part No.
VC 2515-F	1.25	.63	250-0465
VC 2530-F	(31.7)	(16.0)	
VC 2555-F			
VC 2575-F	2.00	1.00	250-0466
VC 25100-F	(50.8)	(25.4)	
VC 25125-F			

Mounting Examples



Mounting with Clamp Mount



Installed with Air Bleed Collar SP 25

Adjustable

The MVC Series feed controls offer a compact design, and are adjustable over a wide range of conditions. This dependable series is a low cost speed/feed control, ideal for applications that do not require the sophistication of more expensive devices.

The MVC Series features fully threaded bodies, integral positive stops and standard rod end buttons. They can be utilized with a wide variety of mounting accessories. See page 40 for accessories.

Technical Data

Impact velocity range: 0.5 to 12 ft/sec (0.15 to 3.66 m/sec).

Operating temperature: 32° to 150°F (0° to 66°C).

Mechanical stop: Integral mechanical stop built into the front of units.


Oil type: Silicone

Material: Steel body with black oxide finish. Stainless steel piston rod.



Feed Controllers MVC

Adjustable

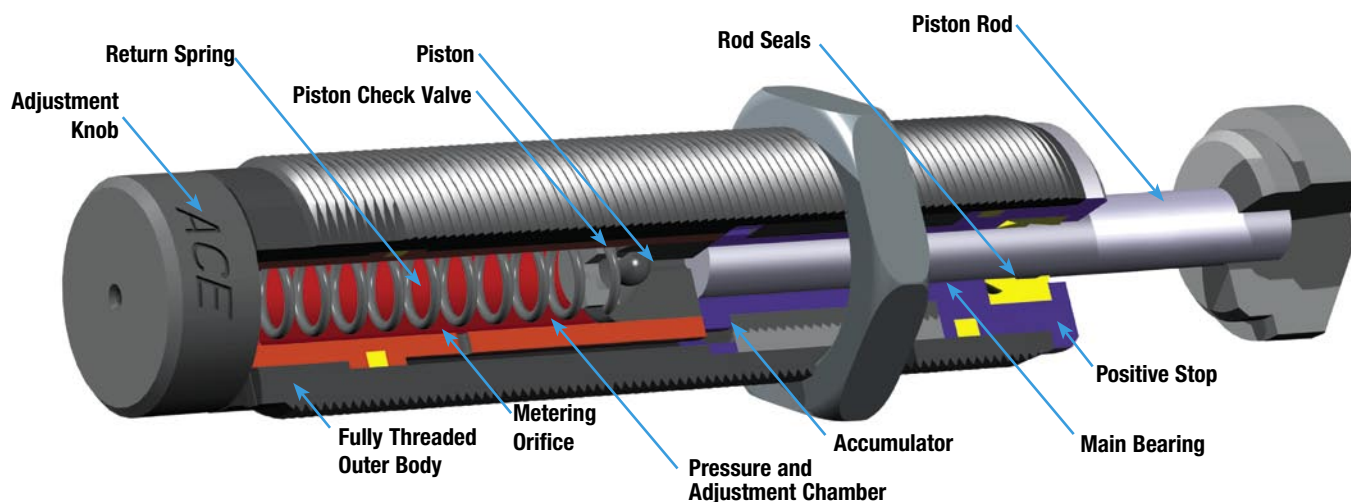

Ordering Information

MVC 225 -

Return Method and Accumulator Style

MVC = Velocity/feed control

Note: All MVC units are spring return, internal accumulator.

Model Number

225
600
900

Mounting Thread

Standard (UNF)
M Metric

Button Options


Standard Steel Button
-NB No Button, Short Rod
-880 No Button, Standard Rod
-BP Steel Button/Urethane Cap Assembly

Note: MA 35 and MA 150 can be utilized as feed controls.

Button Option:

The ACE steel button/urethane cap assembly (-BP) is available if more quiet equipment operation is desired.

Adjustable

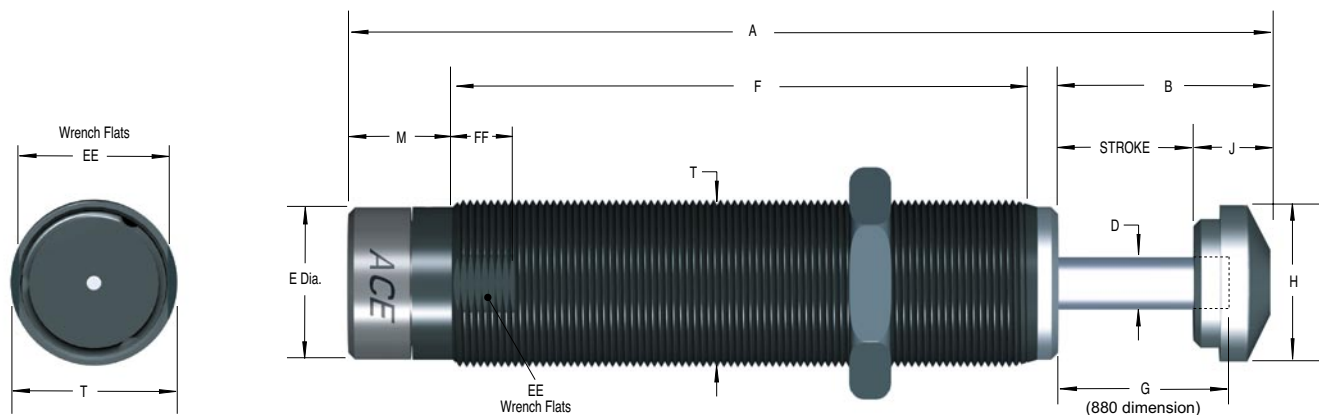

See page 43 for steel button/urethane cap assembly (-BP) dimensions.



Dimensions in inches (millimeters)

Model	Stroke	A	B	D	E	F	G	H	J	M	T	EE	FF
MVC 225	.75	4.67	1.18	.19	.66	2.75	1.00	.66	.43	.55	3/4-16 UNF	11/16	.50
MVC 225M	(19.1)	(118.6)	(30.0)	(4.8)	(16.8)	(69.9)	(25.3)	(16.8)	(11.0)	(14.0)	M20x1.5	(18.0)	(12.7)
MVC 600	1.00	5.62	1.43	.25	.88	3.33	1.25	.90	.43	.67	1-12 UNF	7/8	.50
MVC 600M	(25.4)	(142.6)	(36.3)	(6.3)	(22.4)	(84.6)	(31.8)	(22.9)	(11.0)	(17.0)	M25x1.5	(23.0)	(12.7)
MVC 900	1.58	7.44	2.01	.25	.88	4.58	1.85	.90	.43	.67	1-12 UNF	7/8	.50
MVC 900M	(40.0)	(189.0)	(51.1)	(6.3)	(22.4)	(116.3)	(46.4)	(22.9)	(11.0)	(17.0)	M25x1.5	(23.0)	(12.7)

Specifications

Model	Propelling Force lbs (N) Min-Max	Time Through Stroke At Slowest Setting With Max. Force	Energy per Hour in lbs/hour (Nm/hour)	Return Force lbs (N)	Return Time sec	Shipping Weight lbs (kg)
MVC 225	5 (22) - 400 (1,779)	1.21 sec	400,000 (45,194)	1.05 (4.69) - 2.15 (9.56)	.65	.28 (0.13)
MVC 600	14 (62) - 800 (3,559)	1.33 sec	600,000 (67,791)	2.40 (10.67) - 6.87 (30.56)	.85	.67 (0.30)
MVC 900	15 (67) - 800 (3,559)	2.11 sec	800,000 (90,388)	2.40 (10.67) - 7.40 (32.92)	.95	.87 (0.39)

Operating Range

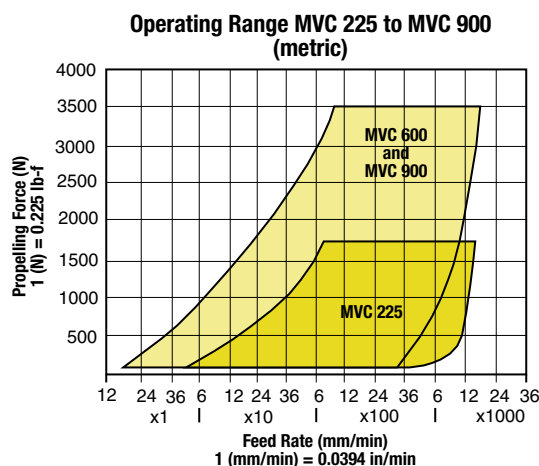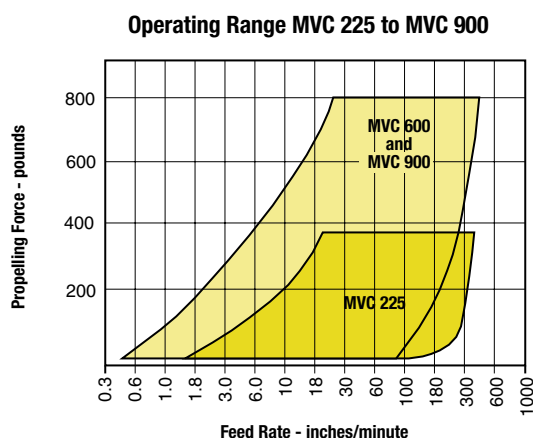

See pages 40, 41 and 42 for accessory information.

Lock nut included with each MVC unit.



Hydraulic Speed/Feed Controllers from ACE are self-contained sealed units designed for precise control of speed in both directions of travel. The travel speed can be adjusted independently in each direction of travel.

These dependable, dual velocity controls (DVC's) are designed to solve automated control and velocity damping problems. DVC models regulate the speed of moving machinery parts and equipment. They are ideal for applications requiring self-contained units that are simple to install and operate.

Features include: adjustable or fixed orifices, single or dual controls and heavy-duty construction.

Applications include: pick and place automation equipment, drill and tapping equipment, machine slides and guards, lids, swinging loads and tooling fixtures.

Technical Data

Maximum operating temperature: 150°F (66°C).

Mechanical stop: Provide mechanical stop .04 to .06 inch (1 to 1.5 mm) before end of each stroke direction.


Operating fluid: Automatic Transmission Fluid (ATF) at 104°F (40°C).

Material: Black anodized, aluminum body. Hard chrome plated, steel piston rod. Zinc plated, steel end fittings.

To special order: Special oils and external finishes. Uni-directional damping (free flow in reverse direction).


82

Hydraulic Speed/Feed Controllers DVC

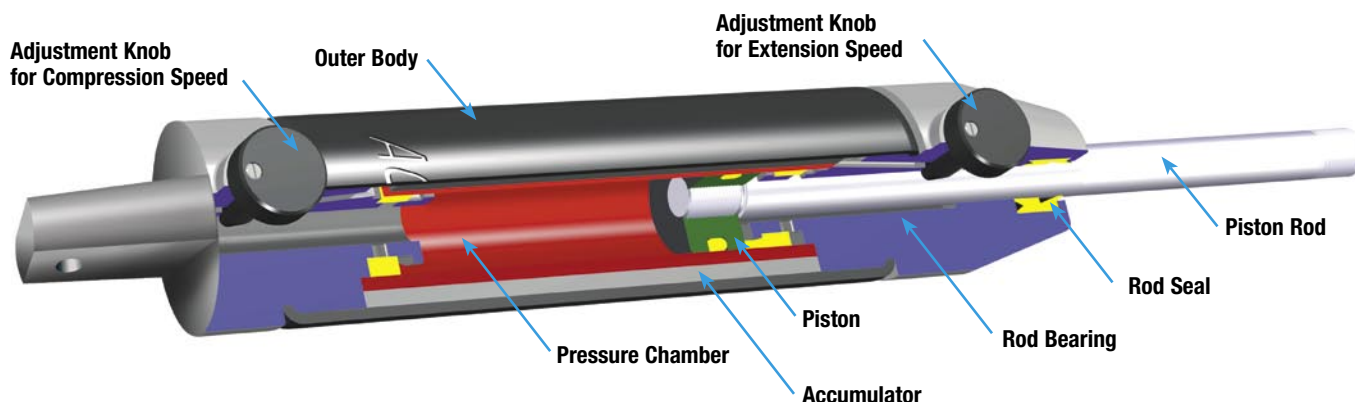

Ordering Information

DVC - 2 M - CCO			
DVC Series	Stroke Length	Mounting Clevis	Velocity Controls
Dual Velocity Control	2 (2" or 50 mm) 4 (4" or 100 mm) 6 (6" or 150 mm)	– Standard M Metric	– Controlled, both directions -CCO Controlled, compression only -CTO Controlled, tension only

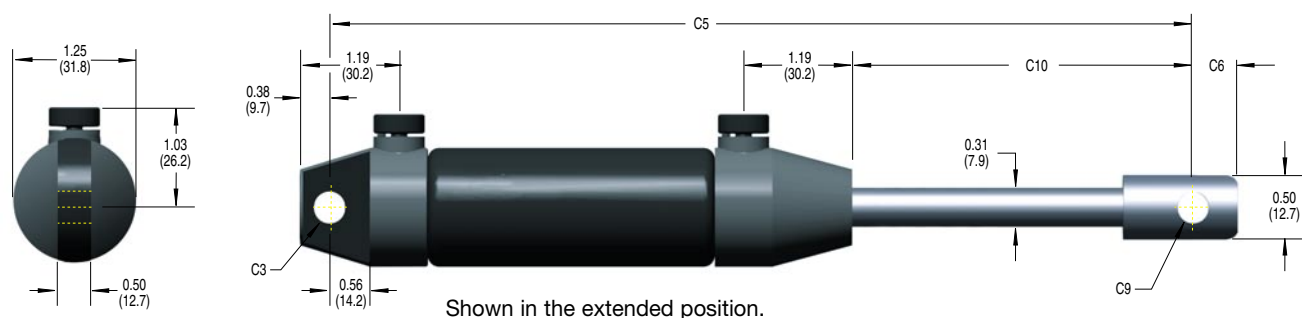

Dimensions in inches (millimeters)



Model	Stroke	C3	C5	C6	C9	C10
DVC-2	2.00	0.25	9.81	0.25	0.25	2.93
DVC-2M	(50.0)	(6.0)	(250.0)	(6.4)	(6.0)	(75.2)
DVC-4	4.00	0.25	13.81	0.25	0.25	4.93
DVC-4M	(100.0)	(6.0)	(350.0)	(6.4)	(6.0)	(124.4)
DVC-6	6.00	0.25	17.81	0.25	0.25	6.93
DVC-6M	(150.0)	(6.0)	(450.0)	(6.4)	(6.0)	(173.6)

83

Specifications


Model	Tension		Compression		Shipping Weight lbs (kg)
	Maximum Propelling Force	Minimum Force to Operate Through Full Stroke	Maximum Propelling Force	Minimum Force to Operate Through Full Stroke	
DVC-2	450 lbs	9.5 lbs	450 lbs	9.5 lbs	0.75 lbs
DVC-2M	2,000 N	(42 N)	2,000 N	(42 N)	0.34 kgs
DVC-4	450 lbs	(External Mechanical Stops Required)	375 lbs	(External Mechanical Stops Required)	0.90 lbs
DVC-4M	2,000 N		1,670 N		0.41 kgs
DVC-6	450 lbs		300 lbs		1.06 lbs
DVC-6M	2,000 N		1,335 N		0.48 kgs

Speed Controls

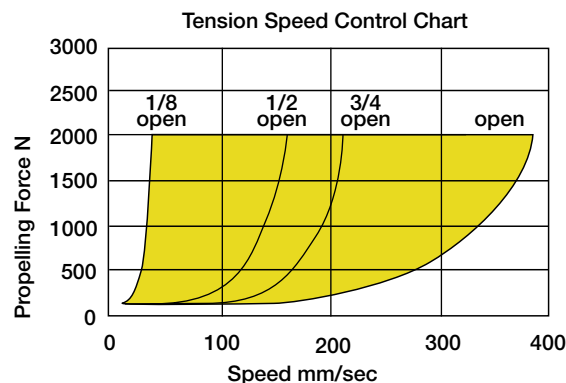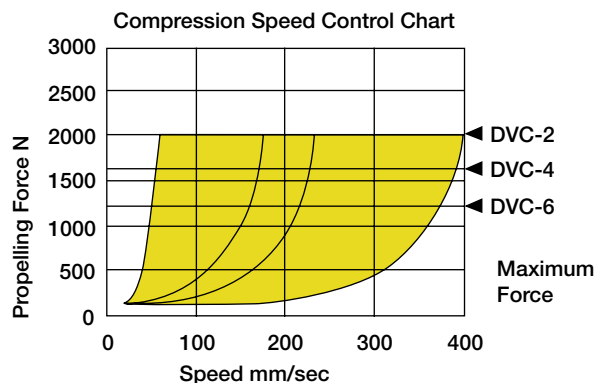

Note: All dimensions and tolerance values listed in this catalog are nominal and subject to change without prior notice.

Drilling Sheet Metal

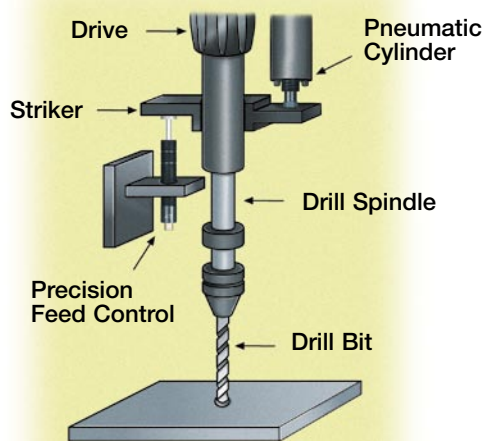


A high force is necessary at the start of drilling when the drill first contacts the sheet.

After the initial cut this high force causes the drill to break through. This results in jagged edges rather than a smooth clean hole and also causes tool breakage.

By installing an ACE VC Feed Control it is possible to precisely control the rate of drill advance. As a result the drilled holes are clean and consistent and drill breakage is considerably reduced.


Cutting Holes in MDF Furniture Panels

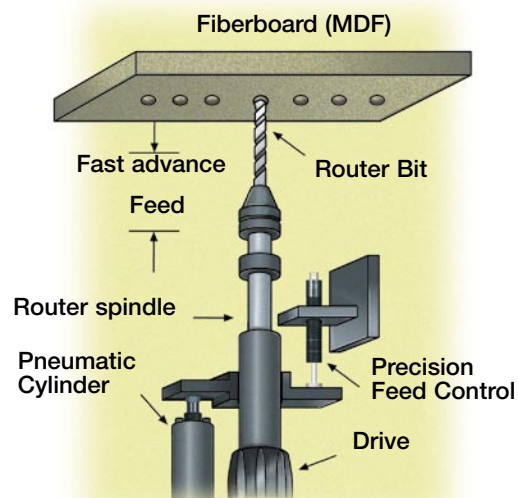

Originally a pneumatic tandem cylinder was used to provide the initial fast advance. This was then slowed to cutting speed by a complicated regulating device. Despite this the control and adjustability was unsatisfactory.


After installing the ACE VC Feed Control the feed rate could be adjusted precisely. The expensive and special tandem cylinder could be replaced by a standard one and the complicated regulating device was no longer required.

Cutting and Chamfering of Plastic Tubes

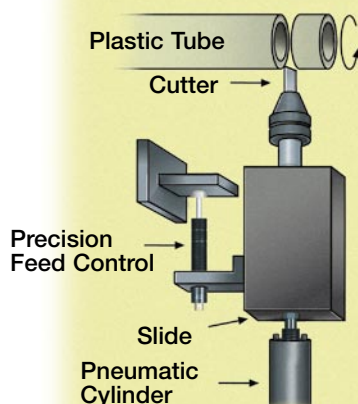

Precisely adjustable cutting and feed speeds are required depending on the particular material being processed. A standard ACE VC Feed Control with its fine adjustment enables the cutter to be controlled exactly for different materials.

Sawing Aluminum and Plastic Profiles

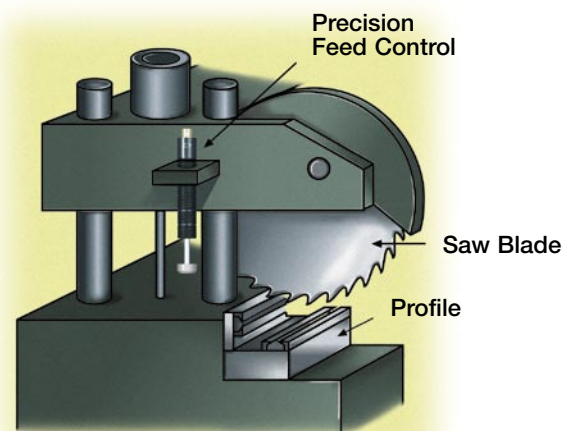

Varying material types, as well as hardness and wear on the saw blade causes the cutting pressure to vary greatly. However the saw advance speed should remain constant as changes cause breakage of the material being cut or of the saw blade.

An ACE VC Feed Control fitted directly to the cutting head provides a simple and low cost solution. The cutting speed remains constant and can be easily preset.



ACE Controls sizing software **ACESIZE** is available to assist you in selecting the proper shock absorber for your application. **ACESIZE** can be downloaded directly from the ACE Controls web site at www.acecontrols.com.

If preferred, an **ACESIZE** CD-ROM can be forwarded to you upon request. If you have an interest in ACE's TUBUS bumper product line as well, you can easily cross-reference from shock absorbers to TUBUS bumpers with **ACESIZE** software. Sizing information for the NuCushion products is also included on **ACESIZE**.

ACE Controls current **CAD** drawing selection software titled **interFACE** may also be downloaded from the ACE web site. It interfaces with AutoCAD and offers you the capability to select 2D and 3D industrial and safety shock absorber drawing files as well as velocity and feed controllers. **Once you have interFACE in your system, you can access the ACE web site at any time, select the specific drawing file that you require and download it.**

If you prefer an **interFACE** CD-ROM, simply contact your ACE Controls distributor or ACE directly.

Distributors can be easily located on the ACE web site at www.acecontrols.com.

3D solid model drawings of all ACE Controls products will soon be available for direct download from the ACE Controls web site.

Other Products

Pressure Foot



The ACE Controls pressure foot is a piston cylinder device that is used to apply a spring force. It contains no oil or seals. The pressure foot contains red lithium grease for lubrication. Magnum Group sized shock absorber models can be produced as a pressure foot. Light, standard and heavy spring forces are available.

Applications include: clamping sheet metal in place, material handling, finished goods work holding, lift and carry as well as mechanical handling for the automotive industry. The pressure foot is ideal for retrofitting existing spring pressure hold down devices.

ACE Controls, Inc. is focused on continuous improvement. We therefore reserve the right to change models, dimensions, or specifications without notice or obligation.


Gas Springs and Hydraulic Dampers



ACE offers a rugged and dependable line of gas springs that are ideal for lifting and counterbalancing loads. They are also utilized for tensioning and as a direct support for sliding weights. Select applications for gas springs include: safety covers, machine guards, access panels, hood supports and ventilation hatches.

ACE Controls' hydraulic dampers are the economical choice for solving your automation damping problems. These maintenance free controls are ideal for drilling and tapping equipment, pick and place automation, swinging loads, tooling fixtures, lids, slides and more.

Rotary Dampers

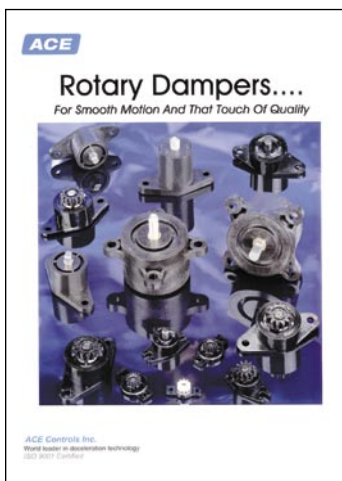


ACE's expanded line of compact rotary dampers promotes smooth mechanical motion that enhances functionality and provides *that touch of quality*. Additional benefits include increased operational safety and component life, as well as noise reduction.

Rotary dampers minimize kinetic energy by controlling velocity. Designs are available utilizing viscous shear, vane with orifice or piston types, in addition to a locking damper. Models are available as single or bidirectional, continuously rotating or single rotating. Other options include: with or without gears, latching or unlatching, and fixed or adjustable.

Selected applications for rotary dampers include: computer hardware, flip top cell phones, compact disc units, video cameras, tape players, automotive compartment panels, seats, aerospace and medical equipment, furniture, safety covers and machine guards.

TUBUS Elastomer Bumpers

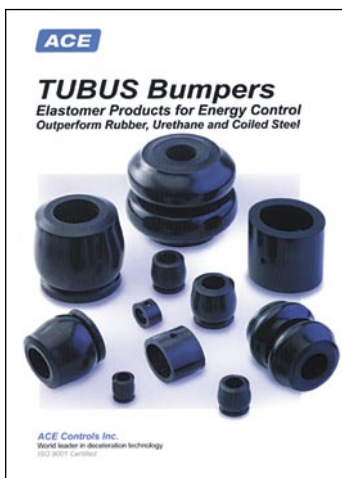

TUBUS elastomer bumpers in various applications boast five times longer life expectancy than coiled steel, ten times more durability than rubber and twenty times more than urethane.

Lightweight, ultra-strong, exceedingly durable TUBUS elastomer bumpers are ideal for use in highly corrosive environments. The material is resistant to chemicals, oil, grease, salt-water, ultraviolet light, hydraulic fluids, fuel and microorganisms. These versatile units will not absorb water and will not swell.

Easily adaptable to existing systems, TUBUS bumpers are suited for applications in the electric drive, robotic, fitness equipment and crane bumper markets. Additional selected applications include: jounce stops, rebound bumpers and stops, oil well heads, as well as mining, steel, paper and sawmill equipment.

Sizing software is available on the ACE web site or on CD-ROM and includes a cross-reference for ACE industrial shock absorbers.



NuCushion™ Superior to Pneumatic Cushions in Pneumatic Cylinders



Awarded Best Product of 2005 In Pneumatic Systems & Controls By Readers of Design News Magazine.



NuCushions shown installed in pneumatic cylinder.



NuCushion mounted externally.

Comprised of a durable elastomer material, the NuCushion has been designed and formed to adapt to pneumatic cylinder pistons to provide superior cushioning over conventional pneumatic cushions.

Reaction forces are considerably reduced when the NuCushions impact the cylinder head or cap. Cycle rates are maintained, without loss of cycle time. Noise reduction is a key benefit of incorporating the NuCushion. Metal-to-metal contact is cushioned.

The NuCushion design is tamper proof. Maintenance or adjustment is not required. A single set of NuCushions handles an entire operating range. They're versatile and compensate for changes in velocity, weight and pressure.

Pneumatic cylinder OEM's contact ACE at 800-521-3320.

If you're interested in purchasing a pneumatic cylinder with NuCushions installed contact Flairline, ACE Controls affiliate, at 248-478-3330.

NuCushion™ Additional Applications

The ACE Controls NuCushion has numerous application capabilities beyond being internally mounted in pneumatic cylinders. NuCushions can be externally mounted to pneumatic cylinders and slides to provide cushioning capability where required.

Tow Bar Snubbers



Pneumatic damping units are ideal for power and free material handling equipment, such as automotive carriage systems. Product damage caused by high-speed acceleration and deceleration is virtually eliminated by controlling reaction forces through the tow bar. The ACE Controls snubber absorbs energy at the carriage so that none of the harmful effects from abrupt starts and stops are transferred to the product.

Stop Collar as Mounting Device



The ACE Controls stop collar for the Magnum Group, in combination with the lock nut can be used as a mounting device as shown in the photograph to the left.

It also functions as an additional positive stop to help prevent unnecessary wear on key internal components such as the piston head and inner tube.

The stop collar for mounting, slides over the Magnum Group built-in stop collar and threads onto the outer tube for ease of installation.

ACE Controls, Inc. World Headquarters

Farmington Hills, Michigan, USA



ACE Controls, Inc. Worldwide Affiliates



ACE Controls International
Newton-Le-Willows, United Kingdom

ACE Controls Japan Ltd.
Tokyo, Japan

ACE Controls Inc., the world leader in deceleration technology, is an ISO 9001:2000 certified manufacturer. Its global customer service network includes offices in England, Germany and Japan with distributors in over 110 cities in 35 countries.

ACE Controls is focused on, and committed to continuous improvement. The goal is to provide customers with cost-effective, world-class products to meet current and future requirements in a competitive marketplace. In order to accomplish this, ACE's engineering team utilizes the latest CAD System design, structural analysis and simulation software.

Rigorous lab testing assures that all new ACE products are capable of meeting the most demanding deceleration challenges. Products are evaluated for endurance, cycle life and material strength.

Manufacturing and quality control processes incorporate the latest in equipment and techniques. A high technology coordinate measuring machine (CMM) inspects ACE's middle and large bore product lines. Smaller parts are subject to a comprehensive inspection by a sophisticated computerized video measurement system.



ACE Stossdampfer GMBH
Langenfeld, Germany

ACE Controls is continuously seeking the best solutions for its customers. As a result, ACE is committed to investing in leading edge software and high-technology equipment.

For additional information, please contact a distributor or ACE Controls directly.



ACE Capabilities video tape or CD-ROM available upon request, or can be viewed on the ACE website.

USA, Canada and Latin America

United States

Location	City	Distributor	Telephone
Alabama	Birmingham	FPS Technologies, Inc.	205-798-9440
Arizona	Tempe	Barkley-Playman	800-525-8592
Arkansas	Fort Smith	Franklin Electrofluid Co.	800-264-7406
	Little Rock	Franklin Electrofluid Co.	800-272-5665
California	Costa Mesa	Clayton Controls Co.	714-556-9446
	Santa Clara	Nor-Cal Controls, Inc.	408-727-5756
Colorado	Englewood	Advanced Air Products Co.	303-778-0800
Connecticut	Bloomfield	Pearse-Pearson Co., Inc.	860-242-7777
Florida	Tampa	Gulf Controls Corp.	800-282-9125
Georgia	Stone Mountain	TSI Solutions	770-879-3500
Hawaii	Honolulu	Hawaiian Fluid Power	808-833-4516
Illinois	Elk Grove Village	Fluid Power Engrg. Co.	847-364-7455
	St. Louis, MO	Air Specialists	314-298-7400
Indiana	Ft. Wayne	Neff Engrg. Co., Inc.	260-489-6007
	Indianapolis	Neff Engrg. Co., Inc.	317-841-9244
	South Bend	Neff Engrg. Co., Inc.	574-272-8282
Kansas	Merriam	IBT Fluid Power Group	913-677-3151
Kentucky	Elizabethtown	Air Hydro Power, Inc.	270-763-0259
	Glaskow	Air Hydro Power, Inc.	270-651-1353
	Henderson	Air Hydro Power, Inc.	270-827-8008
	Lexington	Air Hydro Power, Inc.	859-255-6155
	Louisville	Air Hydro Power, Inc.	502-451-1000
Louisiana	Shreveport	Franklin Electrofluid	318-227-1871
	New Orleans	Franklin Electrofluid	504-486-6653
Michigan	Detroit	ACE Controls, Inc.	800-521-3320
	Flint	Neff Engrg. Co., Inc.	810-232-9350
	Grand Rapids	Neff Engrg. Co., Inc.	616-554-1974
	Grandville	Michigan Fluid Power, Inc.	616-538-5700
Minnesota	Eden Prairie	Braas Co.	952-937-8902
Mississippi	Jackson	Franklin Electrofluid	601-969-7022
Missouri	St. Louis	Air Specialists	314-298-7400
	St. Louis	Fluid Power Engrg. Co.	800-635-8260
Nebraska	Omaha	IBT Fluid Power Group	402-592-2626
New Jersey	Maple Shade	R.G. Group/Van Air & Hyd.	800-526-2708
	Maplewood	Airoyal Company	973-761-4150
New York	Buffalo	Callahan Motion Control	716-741-8321
	Mineola	Airoyal Company	516-248-4833
	Rochester	Vickers-Warnick	585-426-2510
North Carolina	Concord	Automation Technology	704-784-8101
Ohio	Cleveland	ACE Controls, Inc.	800-521-3320
	Dayton	Voelker Controls Co.	937-433-8128
	Toledo	ACE Controls, Inc.	800-521-3320
Oklahoma	Oklahoma City	Shepherd Controls	800-533-1866
	Tulsa	Southwestern Controls	918-663-6777
Pennsylvania	Mainland	Air-Oil Systems	800-333-5520
	Pittsburgh	Pennsylvania Controls Co.	800-247-9425
	York	R.G. Group/Dev-Air Corp.	717-849-0307
Tennessee	Memphis	Action Fluid Power, Inc.	901-794-0857
	Memphis	Franklin Electrofluid Co.	901-362-7504
	Nashville	Meredith Air Controls, Inc.	615-256-1888
Texas	Austin	Shepherd Controls & Assoc.	800-533-1866
	Dallas	Shepherd Controls & Assoc.	800-533-1866
	(East Texas)	Shepherd Controls & Assoc.	800-533-1866
	Dallas	Southwestern Controls	800-444-9367
	Houston	Shepherd Controls & Assoc.	800-533-1866
	Houston	Southwestern Controls	713-777-2626
	San Antonio	Southwestern Controls	800-444-9368

United States

Location	City	Distributor	Telephone
Utah	Murray	Advanced Air Products Co.	801-466-1111
Virginia	Fredericksburg	Advanced Pneumatics	540-898-4511
Washington	Seattle	Warden Fluid Dynamics	206-633-0382
	Spokane	Warden Fluid Dynamics	800-234-8265
	Vancouver	Warden Fluid Dynamics	360-696-4946
Wisconsin	Appleton	Neff Engr. of Wisc.	920-738-5900
	Mequon	Neff Engr. of Wisc.	262-834-6300

If you are located in one of the following states, please refer to the column on the right for the nearest state with an ACE Controls stocking distributor.

State	ACE Stocking Distributor State
Alaska	Washington
Delaware	Pennsylvania, New Jersey
Idaho	Washington
Iowa	Illinois, Kansas, Minnesota
Maine	Connecticut
Massachusetts	Connecticut
Maryland	Pennsylvania & Virginia
Montana	Washington
Nevada	California
New Hampshire	Connecticut
New Mexico	Arizona, Colorado
North Dakota	Minnesota
Rhode Island	Connecticut
Oregon	Washington
South Carolina	North Carolina
South Dakota	Minnesota
Vermont	Connecticut
Washington D.C.	Pennsylvania, Virginia
West Virginia	Pennsylvania, Virginia
Wyoming	Colorado

Canada

Alberta	Edmonton	Peerless Engrg.Sales Ltd.	780-439-3322
British Columbia	Burnaby	Peerless Engrg.Sales Ltd.	604-659-4100
	Prince George	Peerless Engrg.Sales Ltd.	250-563-2130
New Brunswick	St. John	Cowper	506-634-7763
Nova Scotia	Dartmouth	Cowper	902-468-8036
Ontario	Kingston	Cowper	613-547-9991
Ontario	Waterloo	Vickers-Warnick	519-884-8946
Ontario	London	Cowper	519-681-0430
Ontario	Markham	Cowper	905-294-0204
Ontario	Stoney Creek	Vickers-Warnick	905-662-7737
Ontario	Mississauga	Vickers-Warnick	800-493-4308
Quebec	Lachine	Cowper	514-637-6746

Latin America

Mexico	Mexico City	Atlas Industrial Supply, Inc.	52-55-5148-8104
	Mexico City	Kopar	52-55-5240-6249
	Monterrey	Atlas Industrial Supply, Inc.	52-81-8342-5260
	Monterrey	Kopar	52-81-1257-5000
	Saltillo	Atlas Industrial Supply, Inc.	52-84-4439-3263
Puerto Rico	Canovanas	P & C Company.	787-768-5033

Visit the ACE Controls web site for direct hot links to ACE distributor web sites.
ACE Controls web site – www.acecontrols.com

Worldwide

Australia	Rowville	IMI Norgren Pty. Ltd.	03-92130800
Hong Kong	Kowloon	IMI Norgren Pty. Ltd.	852-2492-7608
	Kwai Chung	Universe Technology	852-2619-0013
India	Calcutta	Maco Corp. India	00-91332475-8371
	Hyderabad	3D Equipment	040-55668109
Japan	Tokyo	ACE Controls Japan Ltd.	81-3-5297-2510
Korea	Seoul	Korea Pneumatic System Co.	82-2-2617-5008
Malaysia	Penang	Hoerbiger-Origina Pte. Ltd.	60-4-508-1011
New Zealand	Penrose, Auckland	Plummer Pneumatics Ltd.	0-9-593605
	Penrose, Auckland	IMI Norgren Pty. Ltd.	0-9-5790189

Pakistan	Karachi	J.J. Hyd. & Pneu. Systems	21-566-1063
PRC	Beijing	IMI Norgren Pty. Ltd.	86-10-6581-3978
	Shanghai	IMI Norgren Pneumatics	86-21-6485-7935
	Guangzhou	IMI Norgren Pneumatics	86-20-8762-5340
Singapore	Singapore	Hoerbiger-Origina Pte. Ltd.	(60) 4508-1011
	Singapore	IMI Norgren Pty. Ltd.	(65) 6862-1811
Taiwan	Taipei	Danyao Trading Co. Ltd.	886-2-2276-8200
Thailand	Bangkok	B-TAC Automation Ltd.	0-2-33190624
	Bangkok	Hoerbiger-Origina Pte. Ltd.	(65) 64832959

ACE

Industrial Shock Absorbers

Decelerate Loads

Prevent Impact Damage

Improve Product Performance

Increase Cycle Speeds

Dampen Noise



ACE Controls Inc. 23435 Industrial Park Drive Farmington Hills, MI 48335 p. 800-521-3320 (248)476-0213 f. (248)476-2470

Catalog No. 200-0069 © ACE Controls, Inc. 2006 All rights reserved.

shocks@acecontrols.com www.acecontrols.com

Products on front and back covers shown actual size, except in the three color box areas on front cover.

ACE


World leader in deceleration technology

ACE Controls Inc. Main Catalog

**Industrial Shock
Absorbers**



**Safety Shock
Absorbers**



**Velocity and Feed
Controllers**



01/06

